



Archived Content

Information identified as archived is provided for reference, research or recordkeeping purposes. It is not subject to the Government of Canada Web Standards and has not been altered or updated since it was archived. Some of this archived content is available only in one official language. Translation by CMHC can be requested and will be provided if demand is sufficient.

Contenu archivé

Le contenu identifié comme archivé est fourni à des fins de référence, de recherche ou de tenue des dossiers; il n'est pas assujetti aux normes Web du gouvernement du Canada. Aucune modification ou mise à jour n'y a été apportée depuis son archivage. Une partie du contenu archivé n'existe que dans une seule des langues officielles. La SCHL en fera la traduction dans l'autre langue officielle si la demande est suffisante.

Series: 1976 (Letter-Number)

Project #: H-2 **Number of Sheets (Total):** 4 **Without Duplicates:** 2
Number of Versions: _____ **Sheets Per Version:** _____

Official Language: E
Measurement System: Imperial
File System: Hardcopy

Architect or Branch: CMHC, in-house
Year: 1976

Project Description: H-2
3 (or 4)-Bedroom Bi-Level, Sloped Site
1064 ft² Upper Level (Provisional Basement Plans)

Number of Storeys: 1½, Split Level
Type: Single detached
Occupancy: Single family
Number of Bedrooms: 3
Finished Area
(Building Total): 1612 ft²/ (Approximate)

Drawings:

Scale:

- | | |
|--|----------|
| 1. Plans; Section; Detail Wall Section; Elevation; Kitchen Elev's. | As Noted |
| 2. Duplicate--Page 1 | As Noted |
| 3. Duplicate--Page 1 | As Noted |
| 4. Site Plan; Section; Exterior Perspective | |

Basement: Yes--partially finished
Foundation: poured concrete
Comments: 1 bedroom, bath, family room and
laundry for finished option

Fireplace? no Comments:

Car Accommodation: no car accommodation

Cladding:







Primary Exterior Cladding: Vertical wood siding
Specifications:

Secondary Exterior Cladding: N/A
Specifications:

Other Cladding: N/A

Roofing: Asphalt shingles
Roof Shape: Hip
Comments:

Special Features: N/A
Comments:

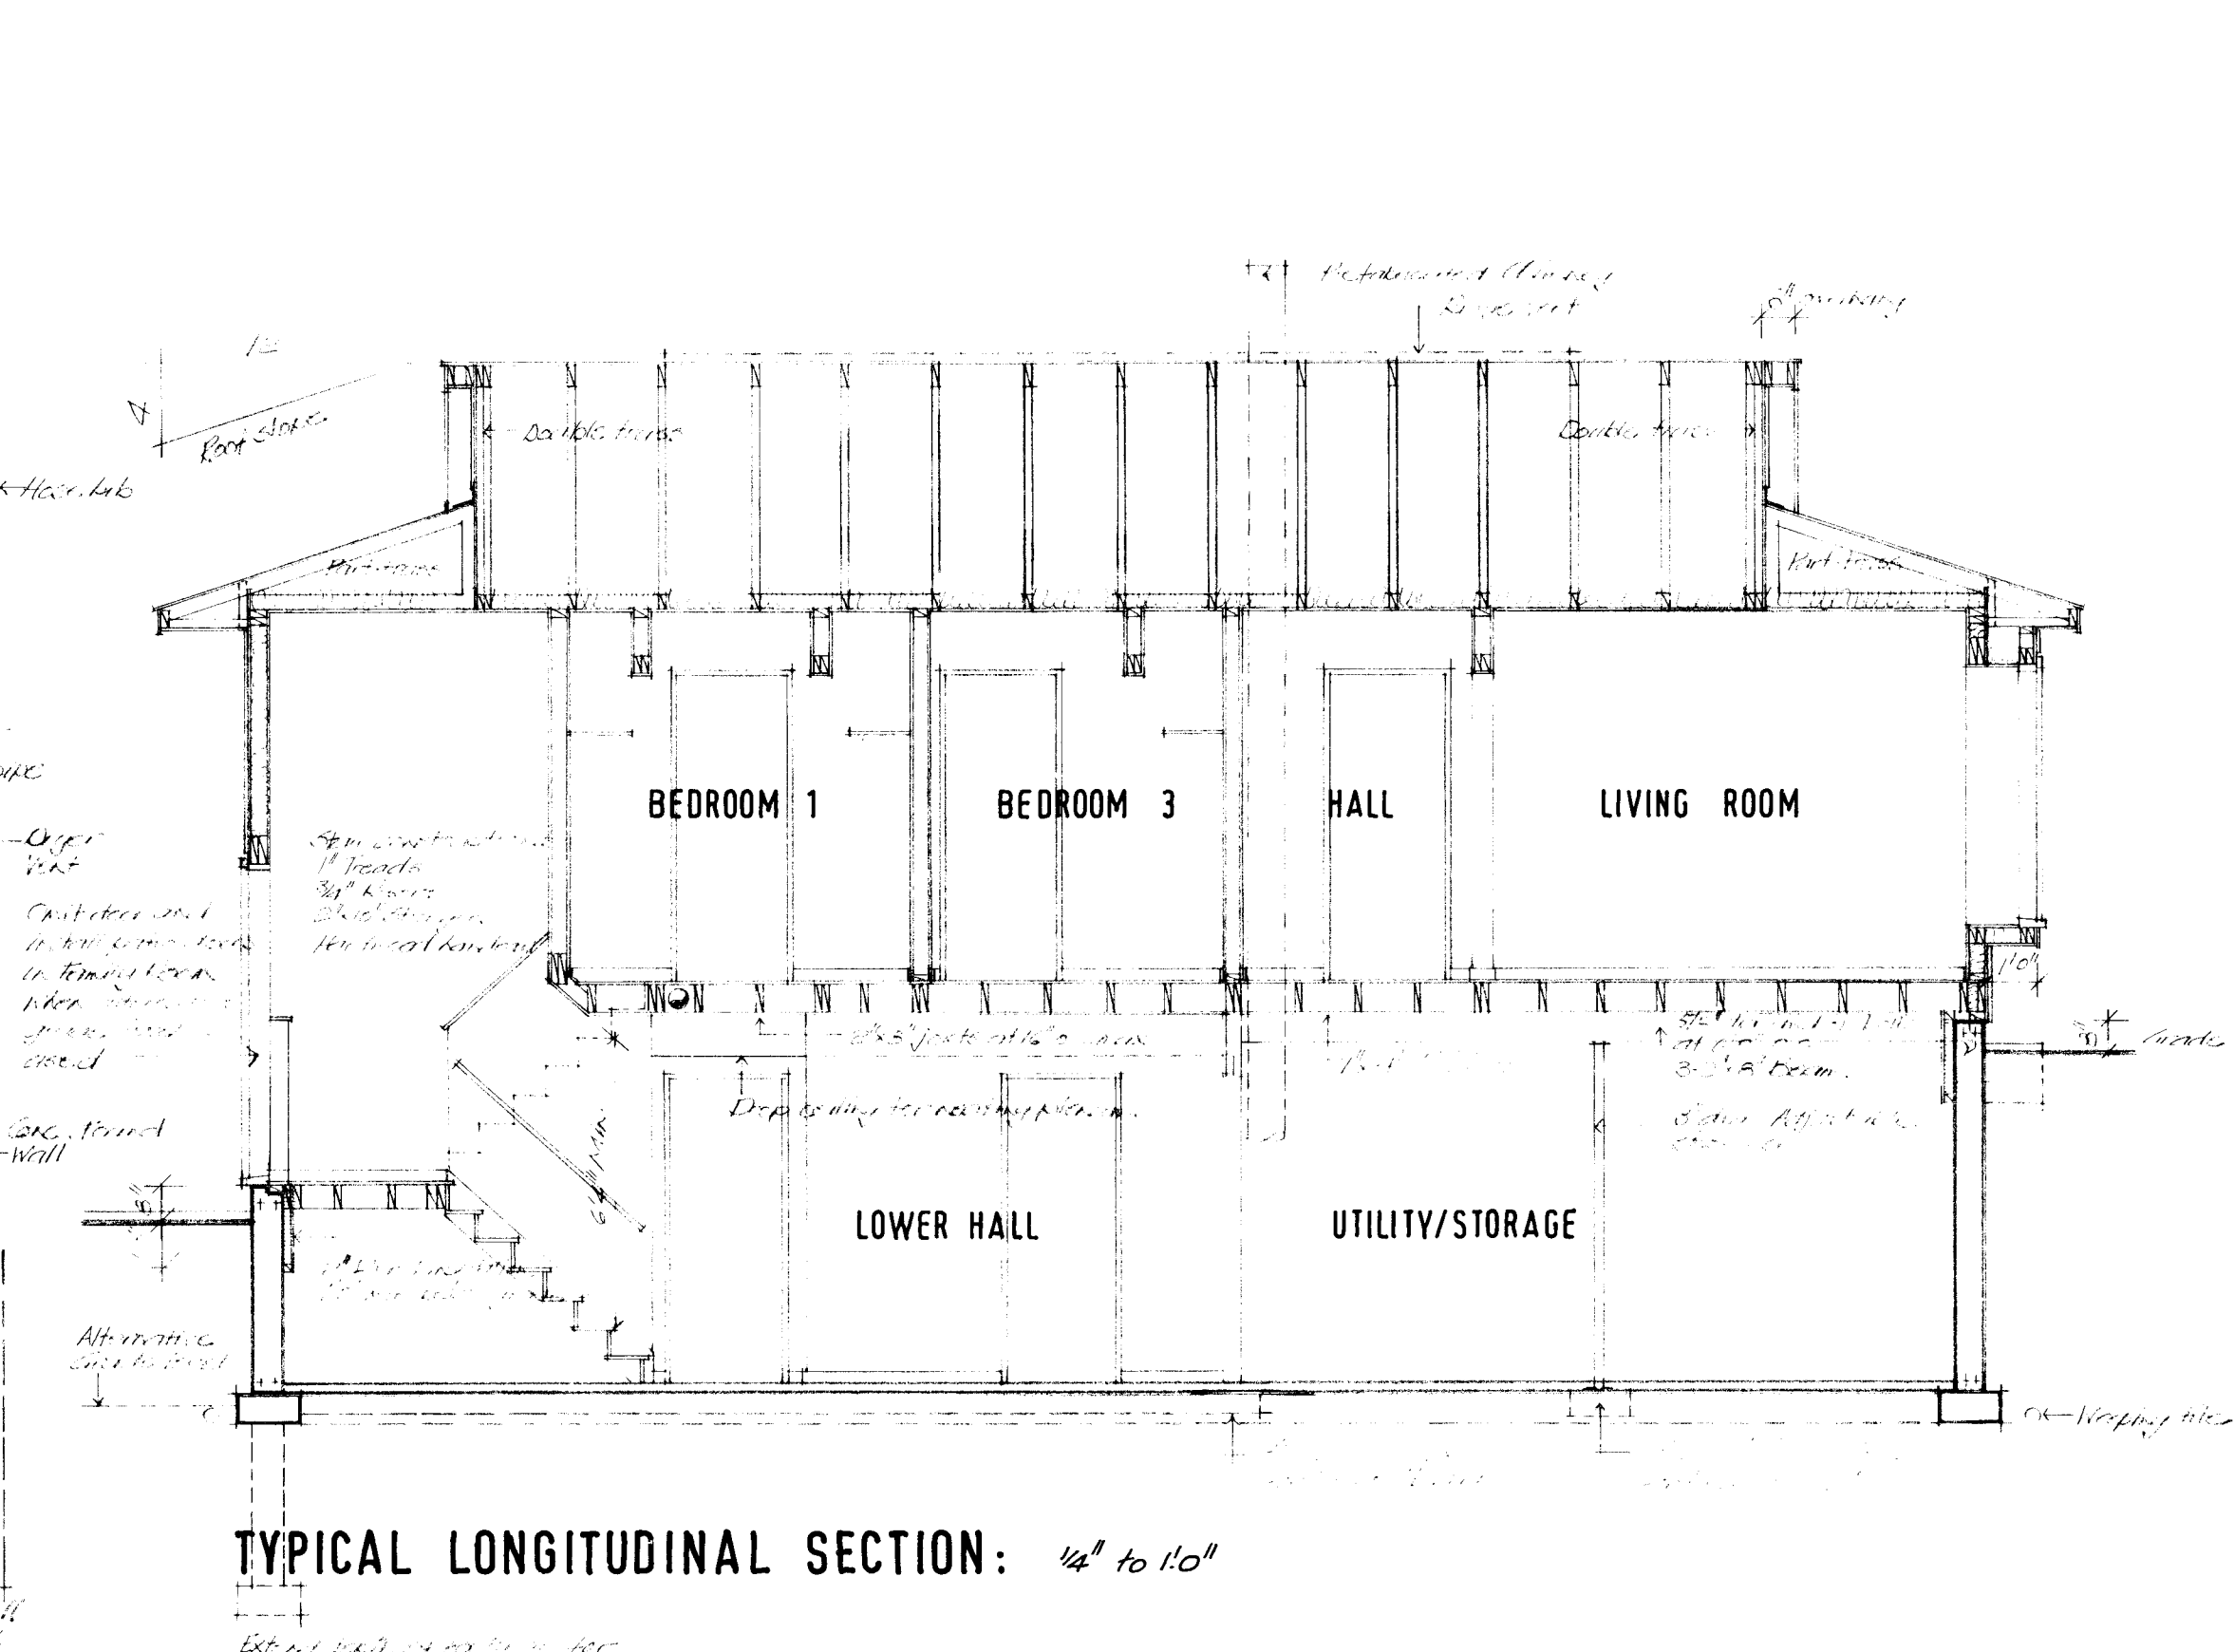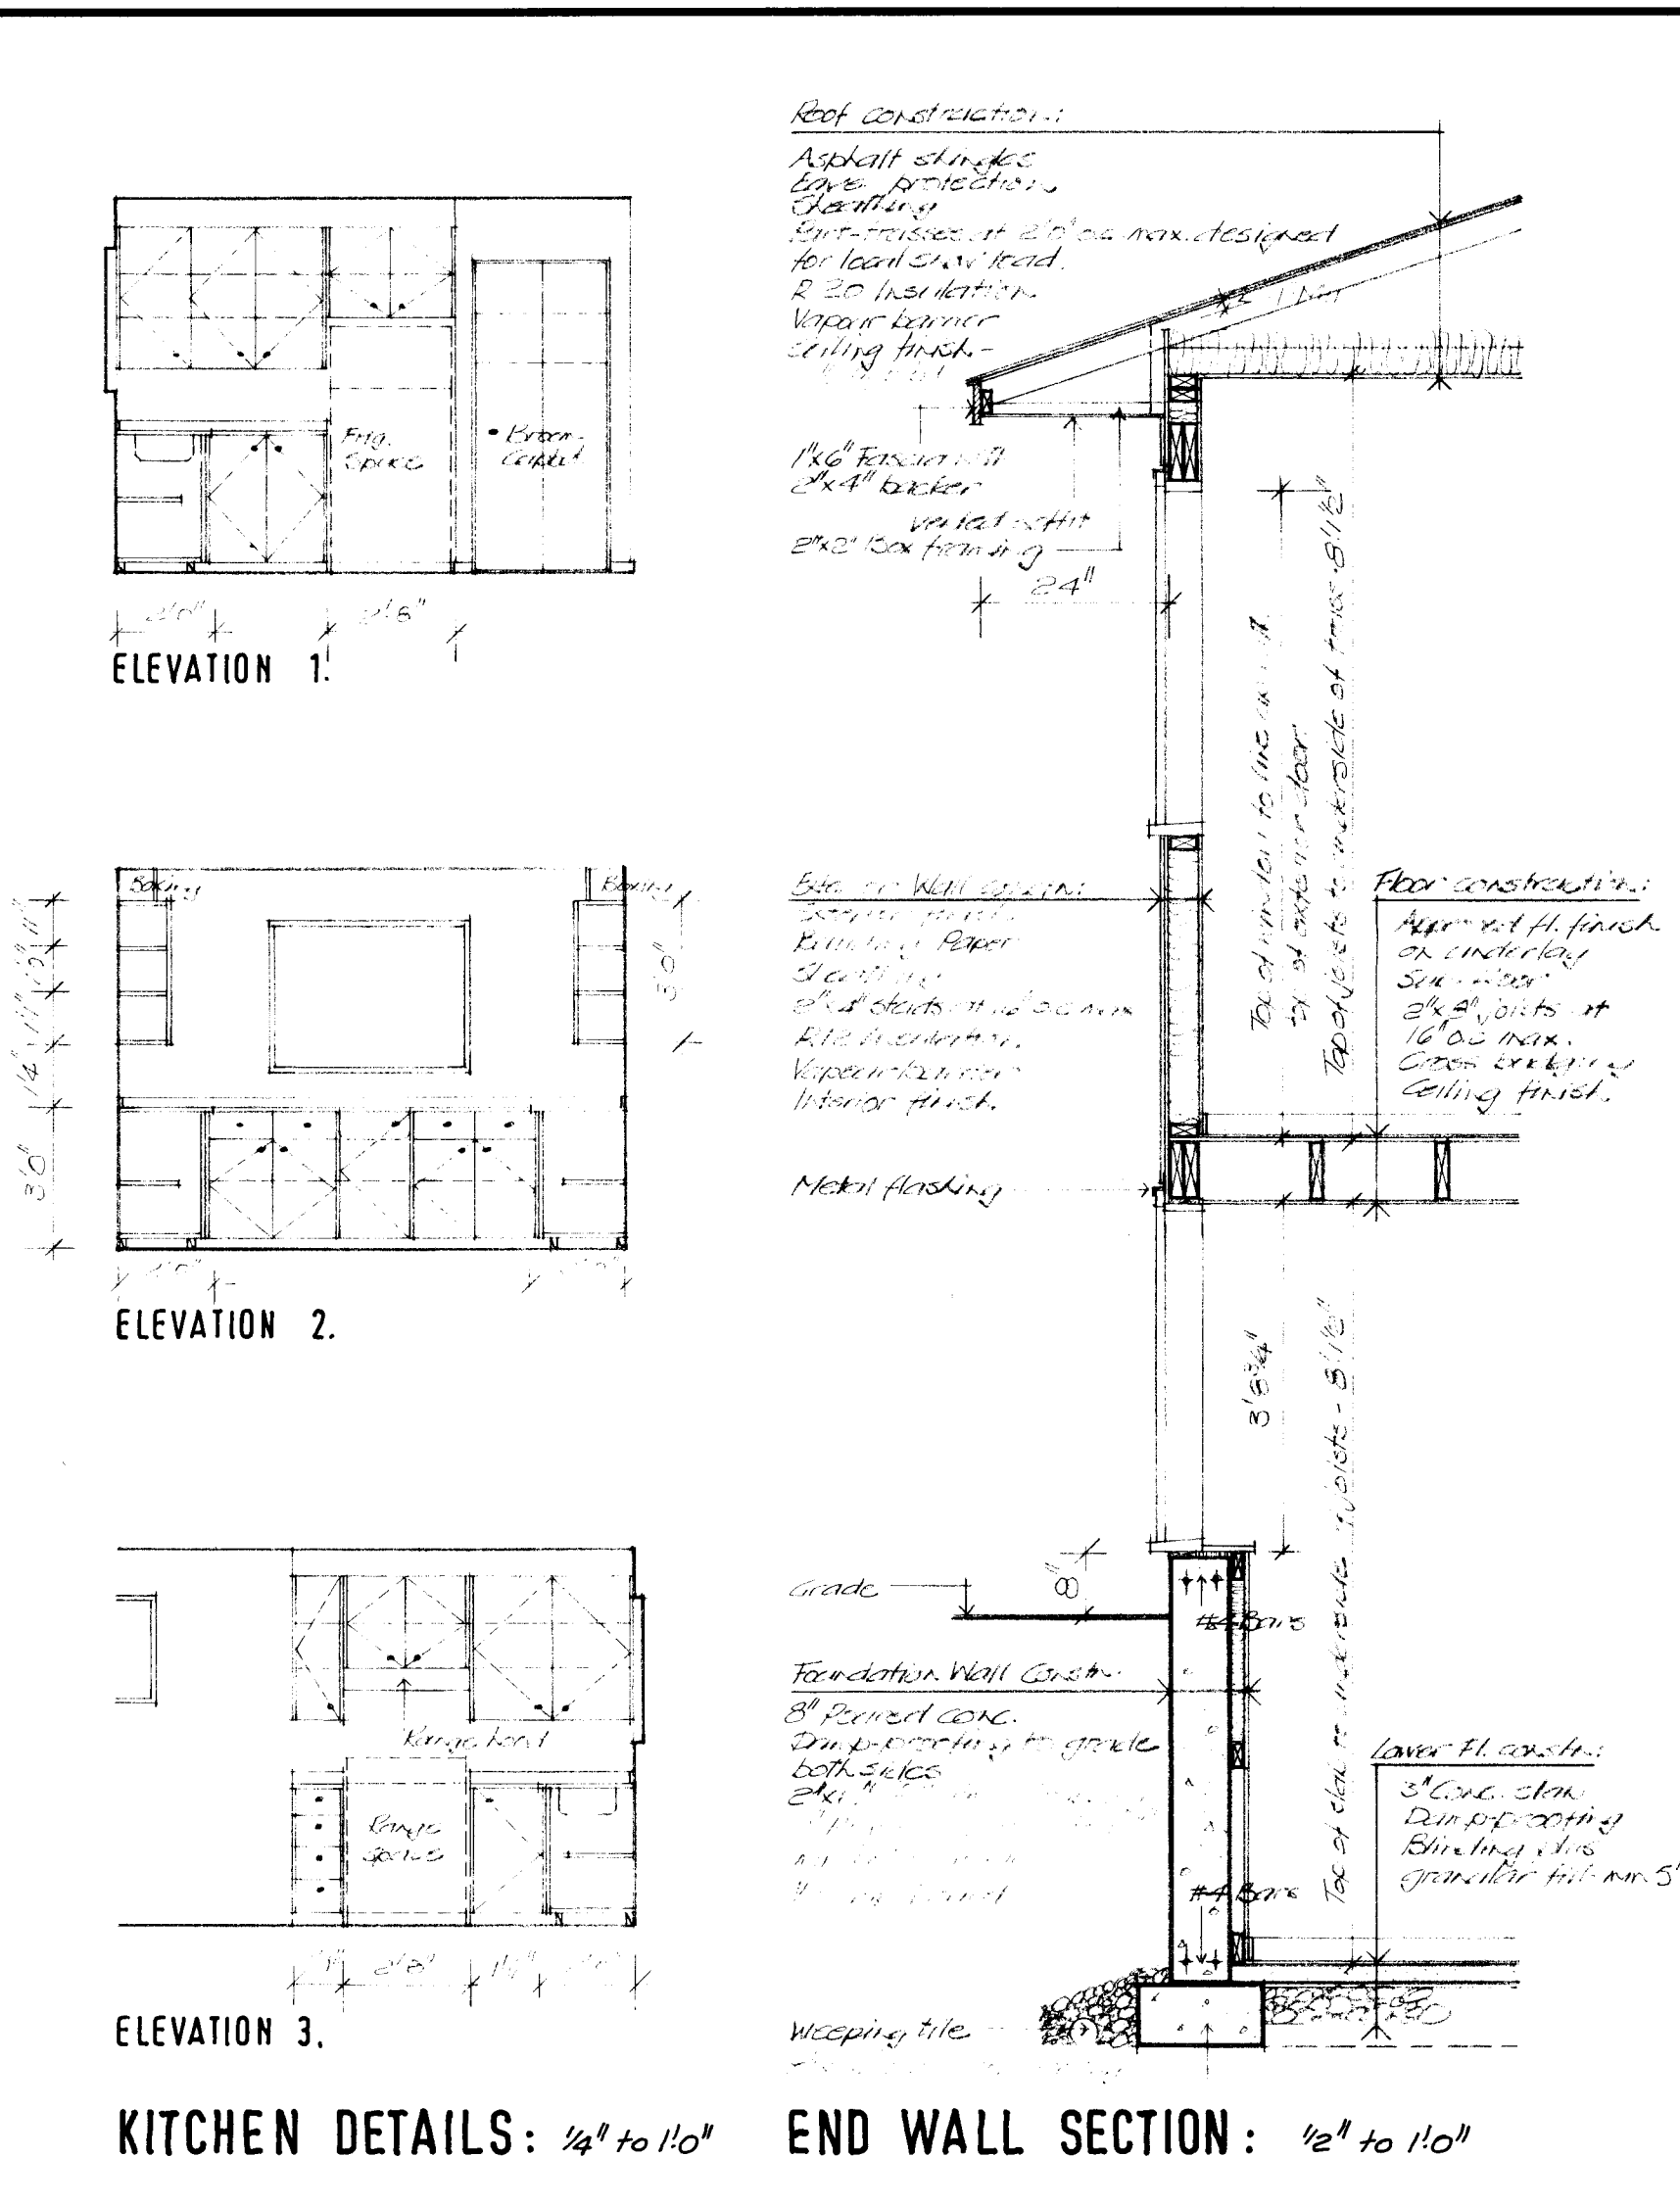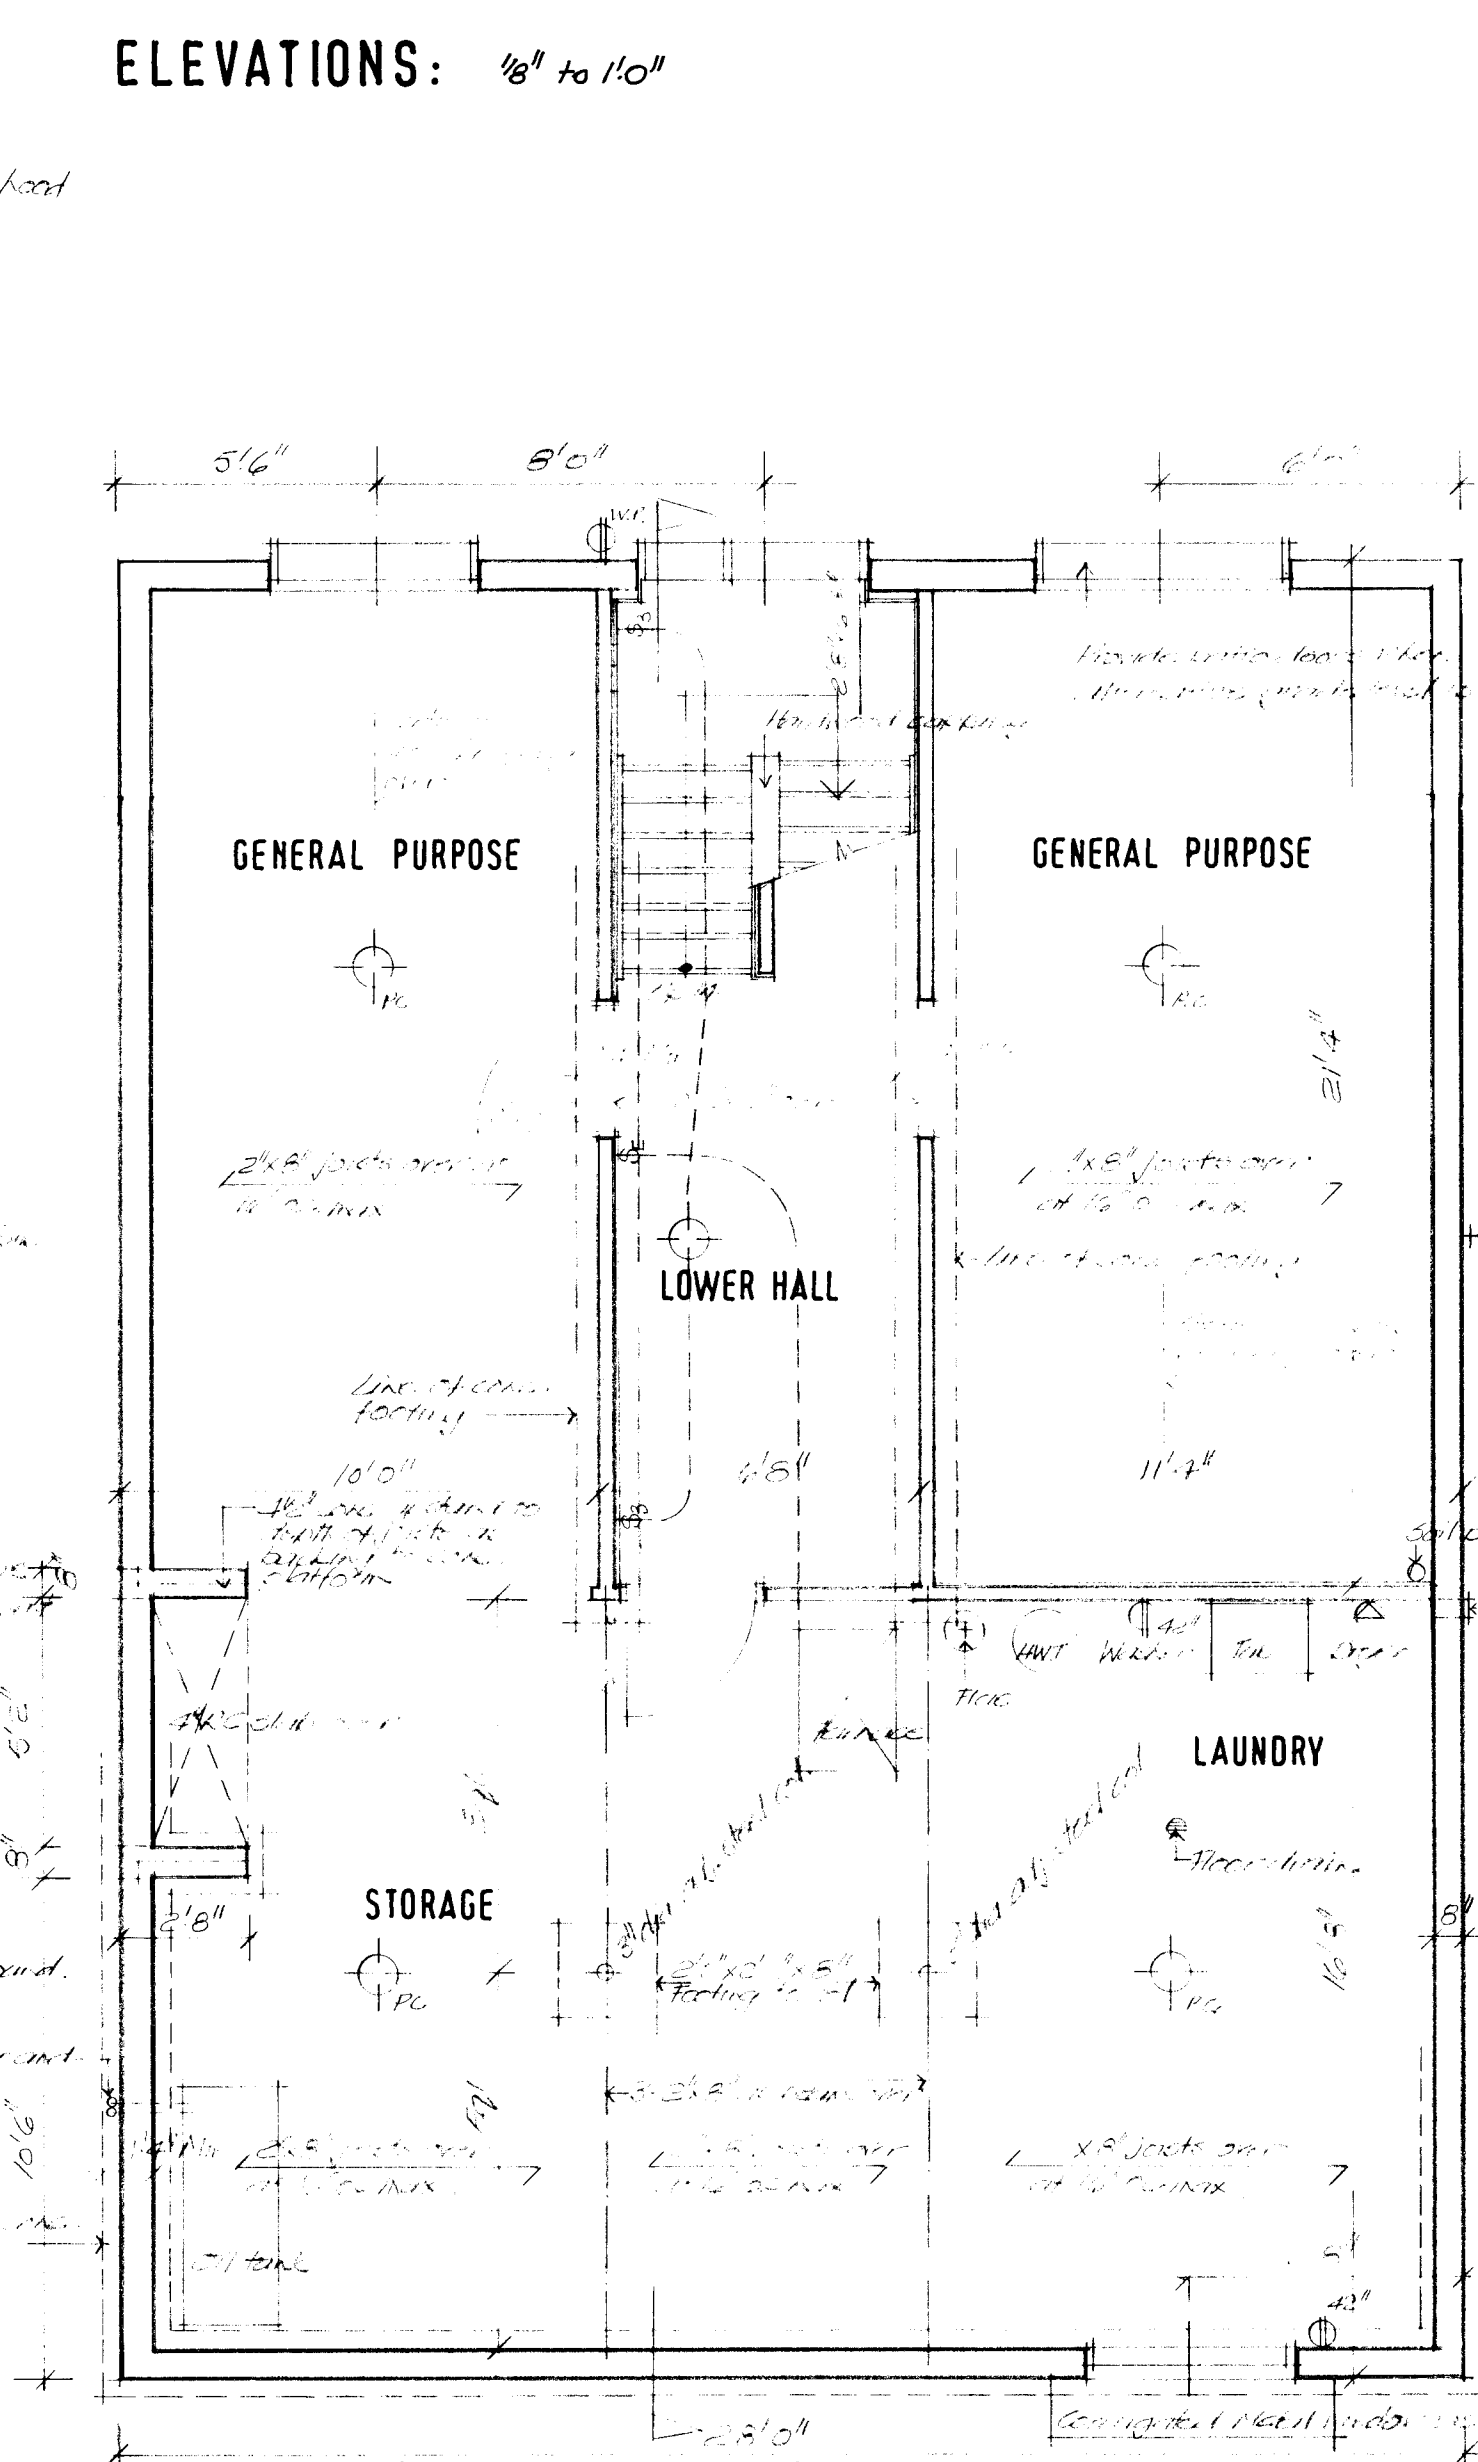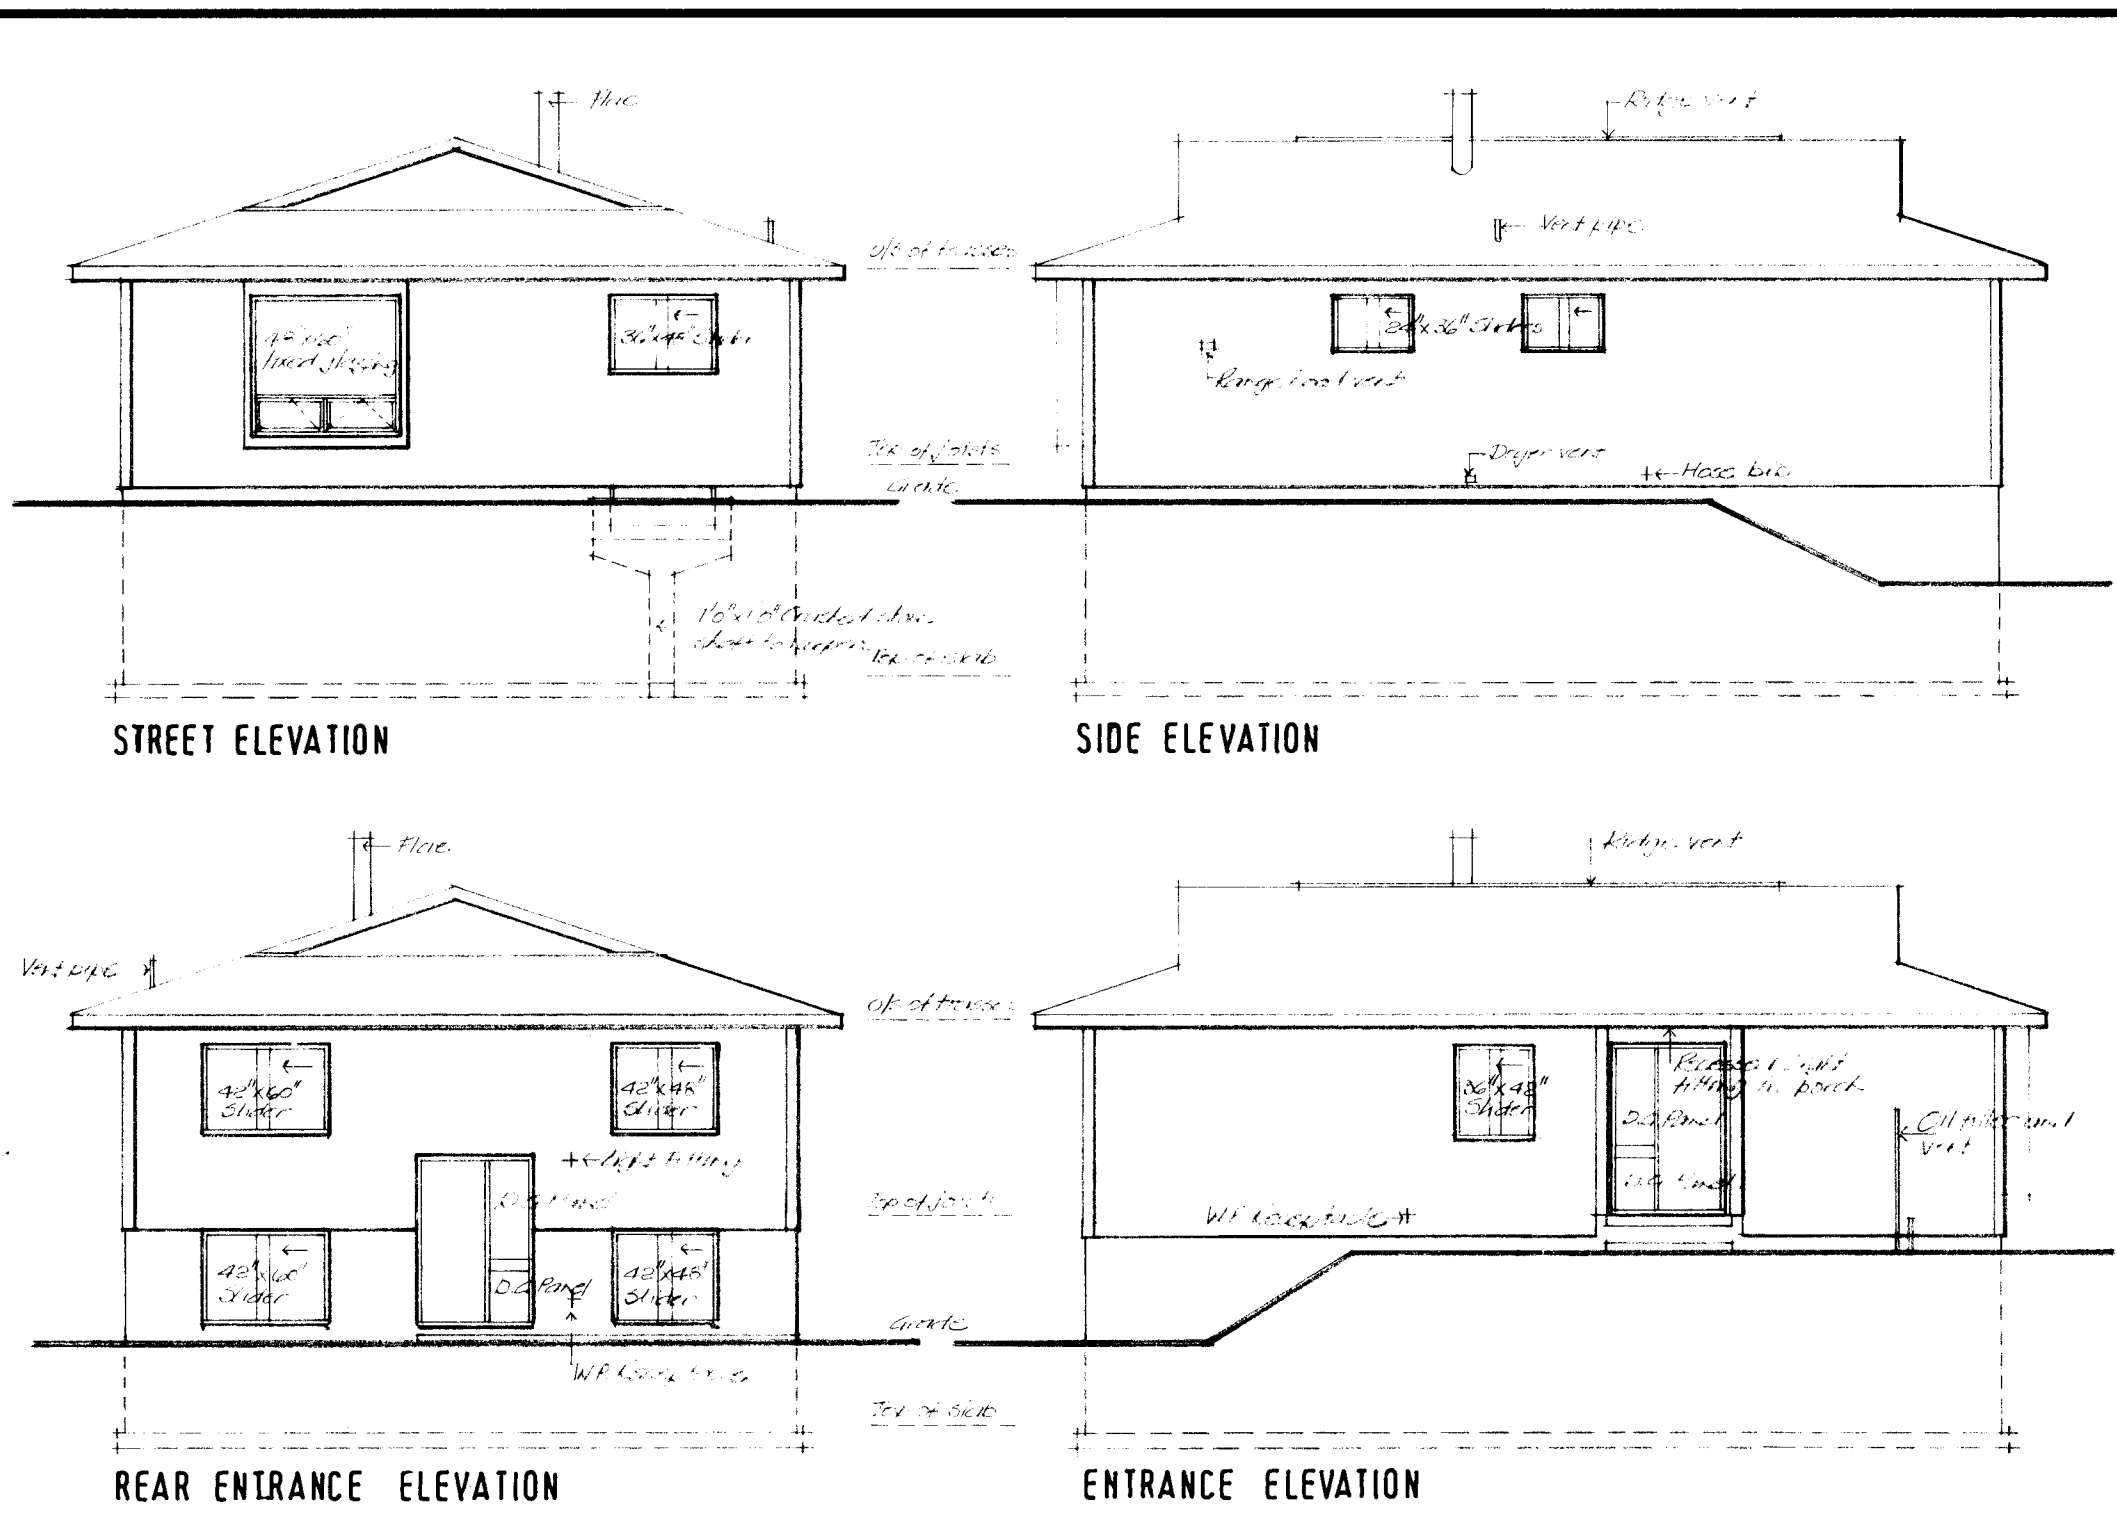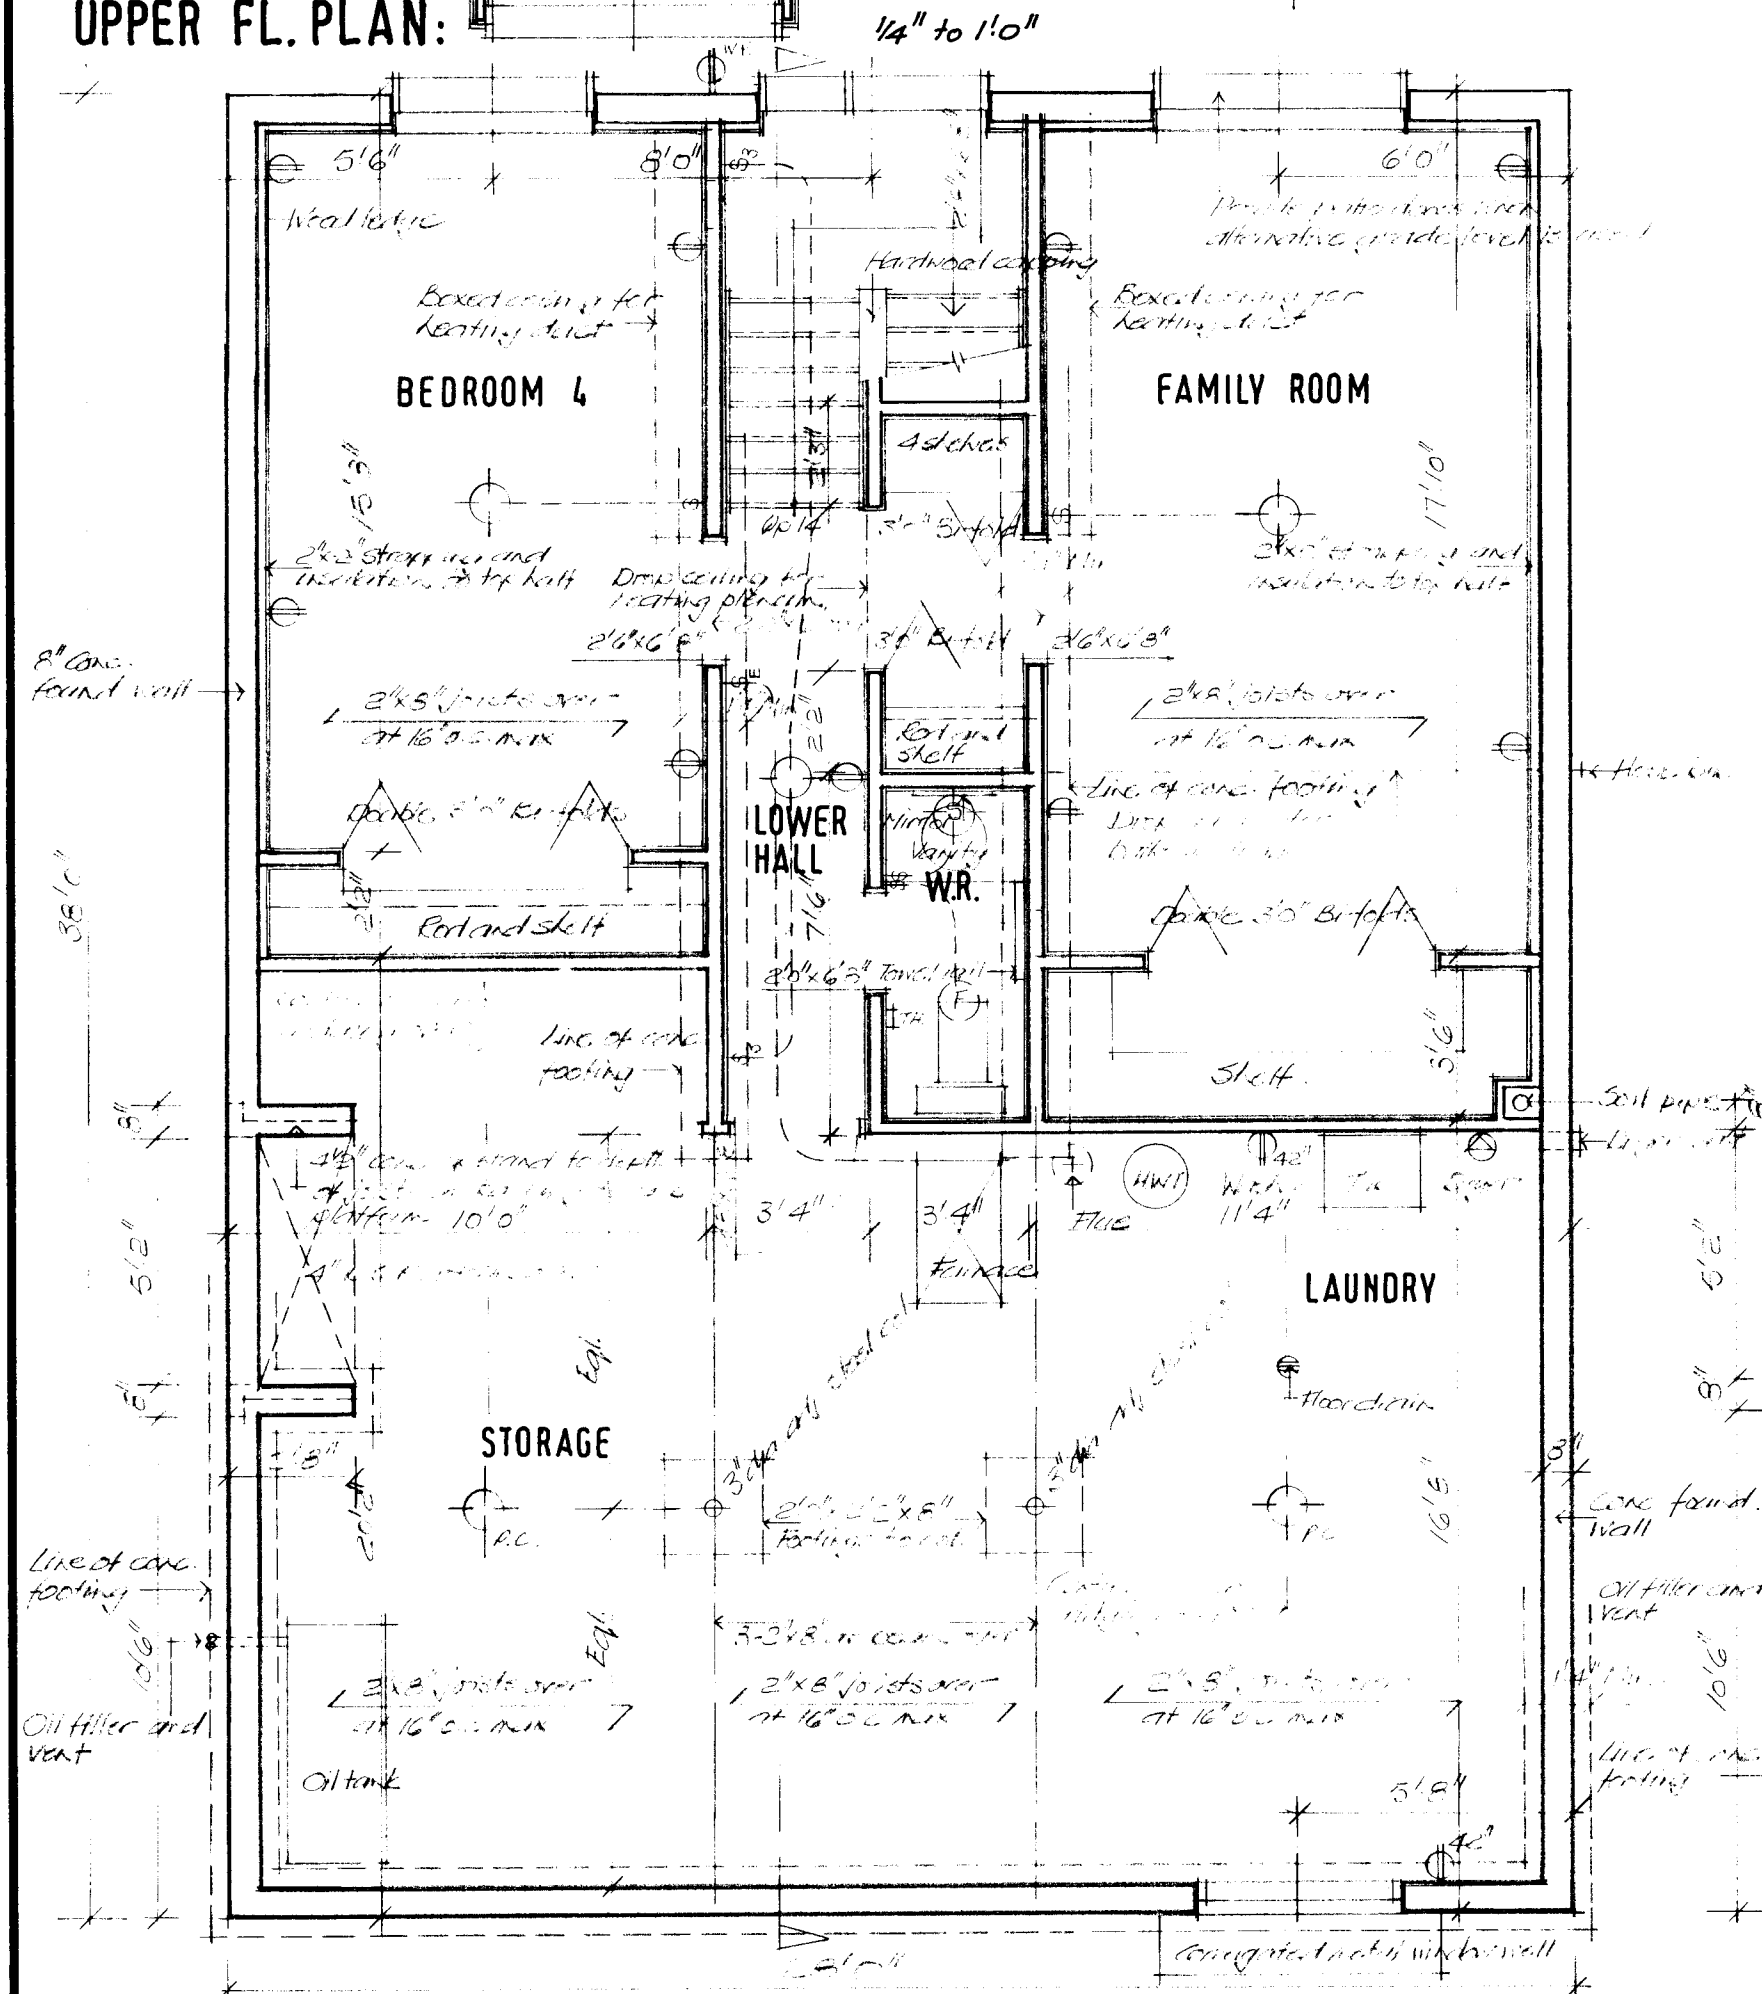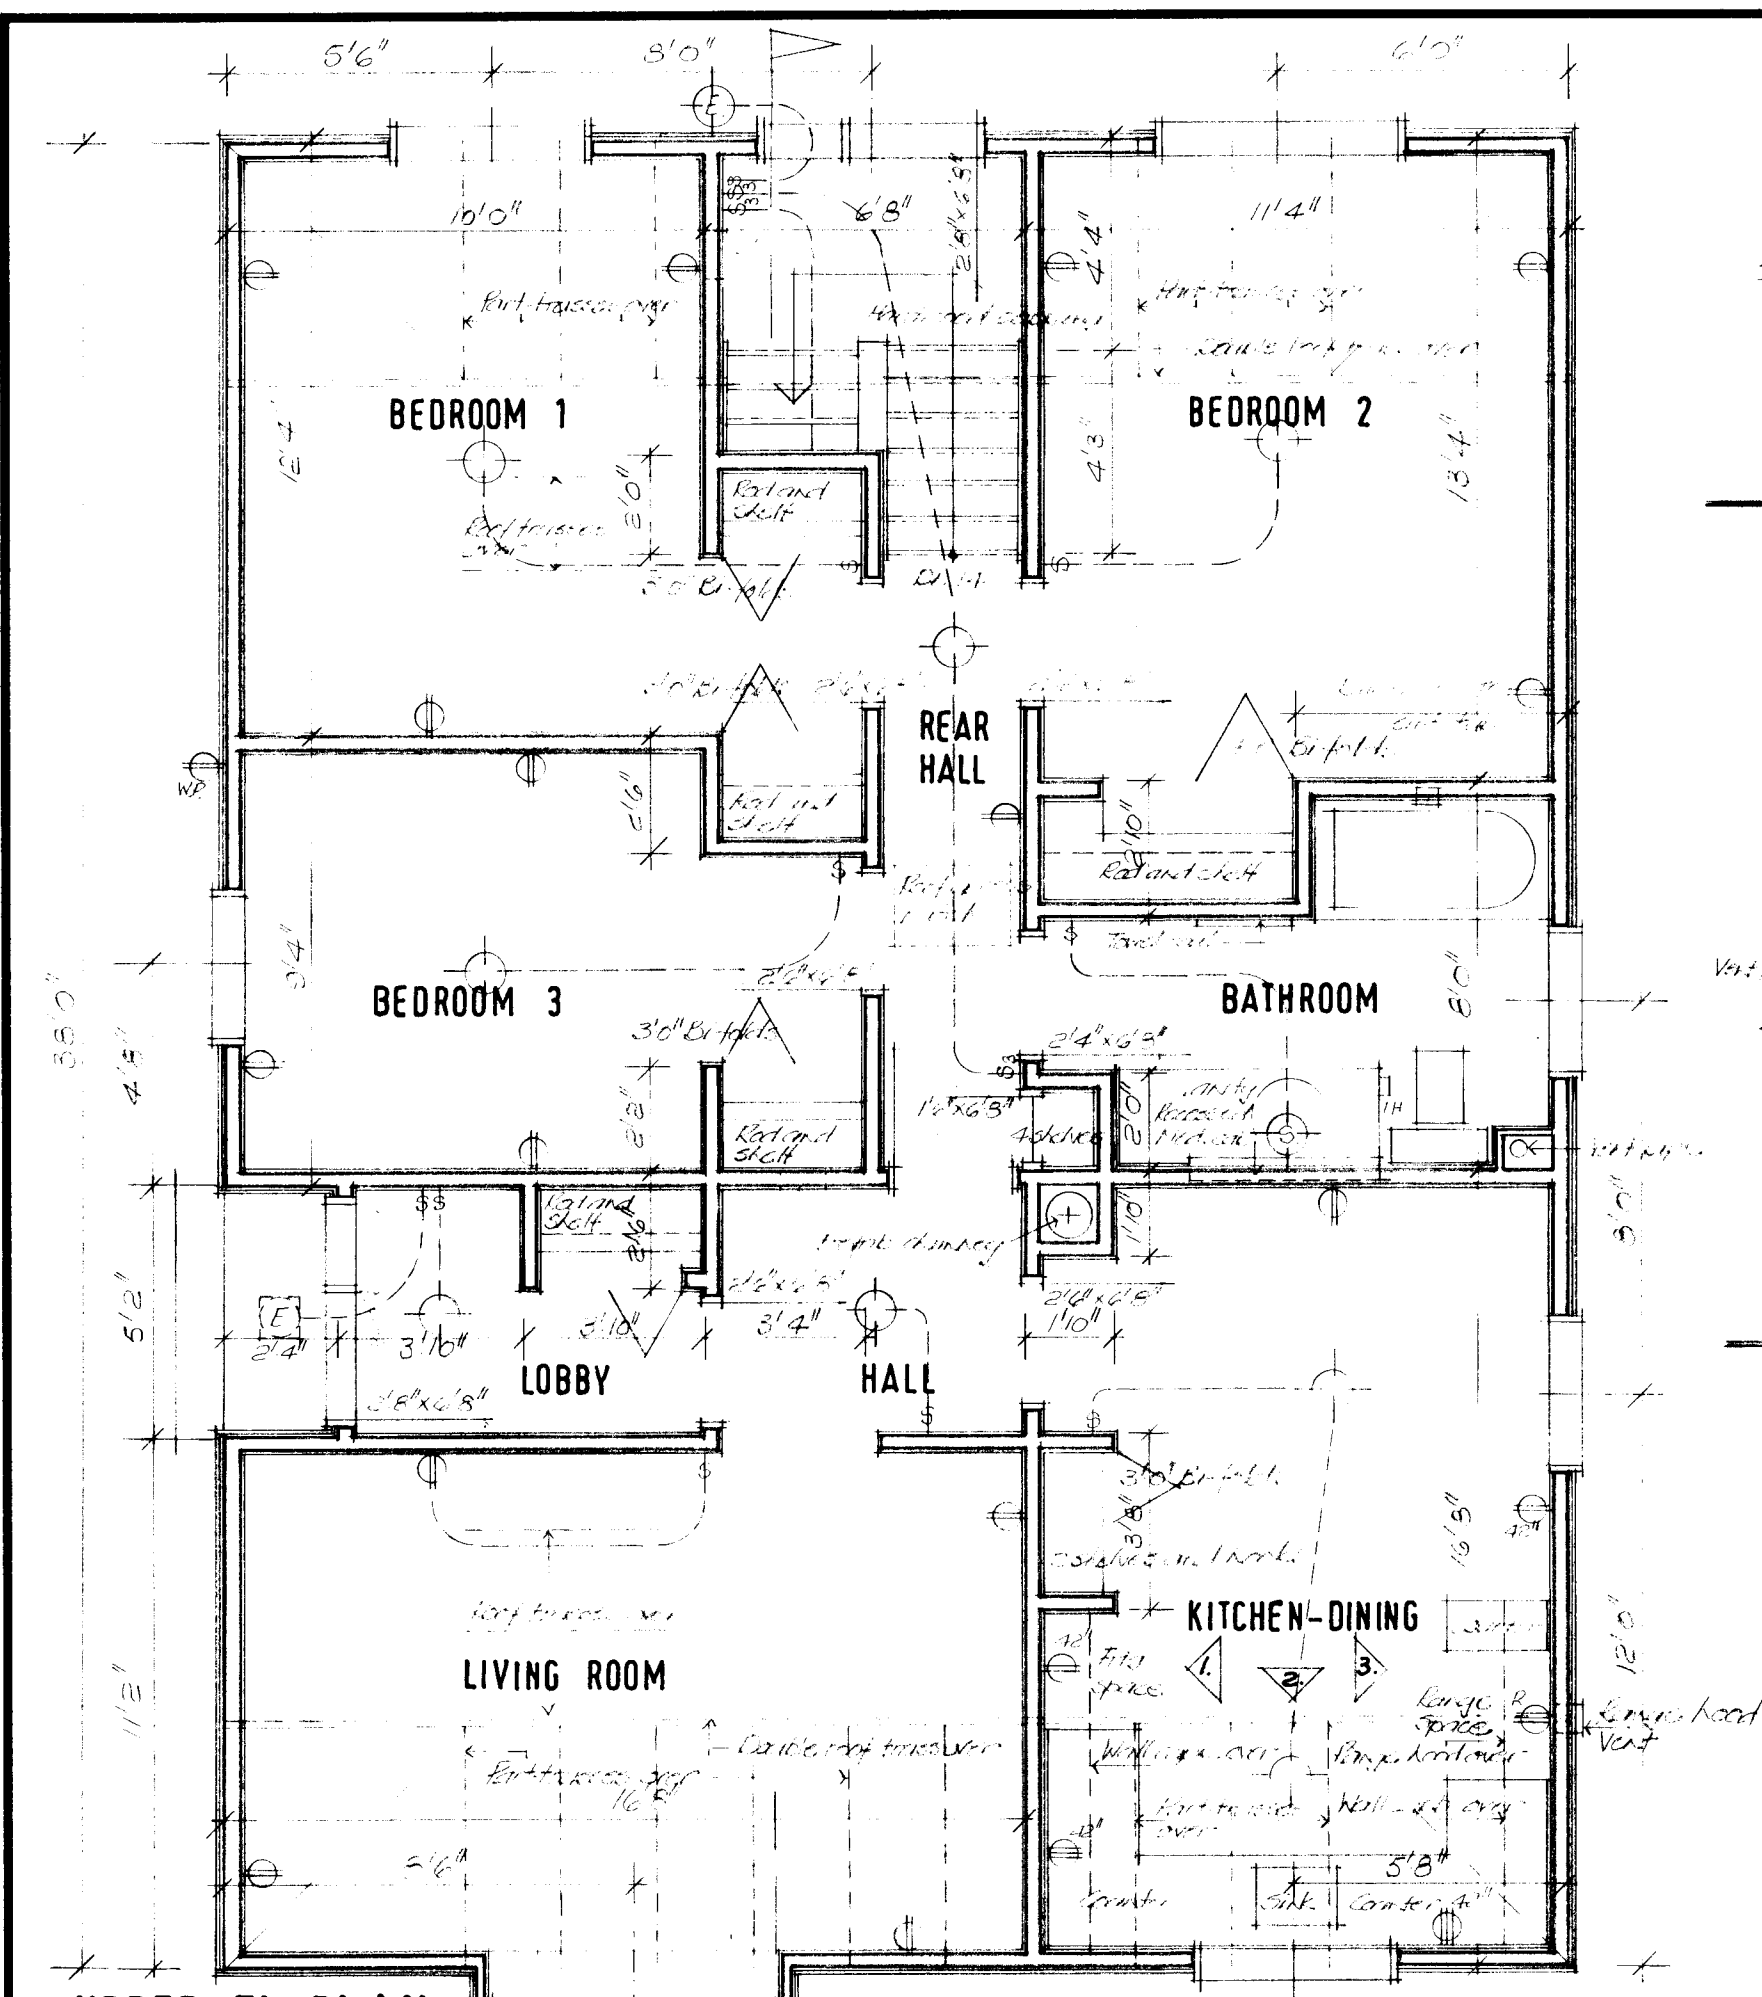

GENERAL NOTES

- ALL FOOTINGS AND FOUNDATIONS SHALL REST ON UNDISTURBED SOIL OR ROCK. FOOTINGS AND FOUNDATIONS MAY HAVE TO BE INCREASED TO SUIT EXISTING LOCAL SOIL CONDITIONS.
- DOUBLE JOISTS REQUIRED UNDER PARTITIONS RUNNING PARALLEL TO THE FLOOR JOISTS MAY BE BLOCKED APART 8" AT 4'-0" O.C. TO PERMIT THE PASSAGE OF HEATING DUCTS ETC.
- THE POSITION AND NUMBER OF ELECTRICAL OUTLETS MAY BE RELOCATED BUT MUST IN ALL CASES MEET THE MINIMUM REQUIREMENTS OF THE RESIDENTIAL STANDARDS AND COMPLY WITH LOCAL CODES.
- PROVIDE A ROD AND AT LEAST ONE SHELF IN ALL COAT AND CLOTHES CLOSETS.
- ALL FLOOR JOISTS ARE DESIGNED TO NO. 1 GRADE SPRUCE. ANY CHANGE OR SUBSTITUTION MUST BE APPROVED BY AUTHORITY HAVING JURISDICTION.
- ALL CONSTRUCTION MUST COMPLY WITH THE RESIDENTIAL STANDARDS CURRENT AT THE TIME OF CONSTRUCTION AND ANY APPLICABLE LOCAL CODES.
- THIS DRAWING IS INTENDED AS A GUIDE ONLY. THE FINAL CHOICE AND USE OF MATERIALS, AND METHODS AND DETAILS OF CONSTRUCTION, IS THE RESPONSIBILITY OF THE USER.

plot plan

date	n.h.a.	stds	chkd	by	date	revisions	by

CMHC SCHL

Central Mortgage and Housing Corporation

Société centrale d'hypothèques et de logement

designer

C.M.H.C.

design no.

H - 2

scale







as shown

date

May 1976

drawing no.

1 of 1

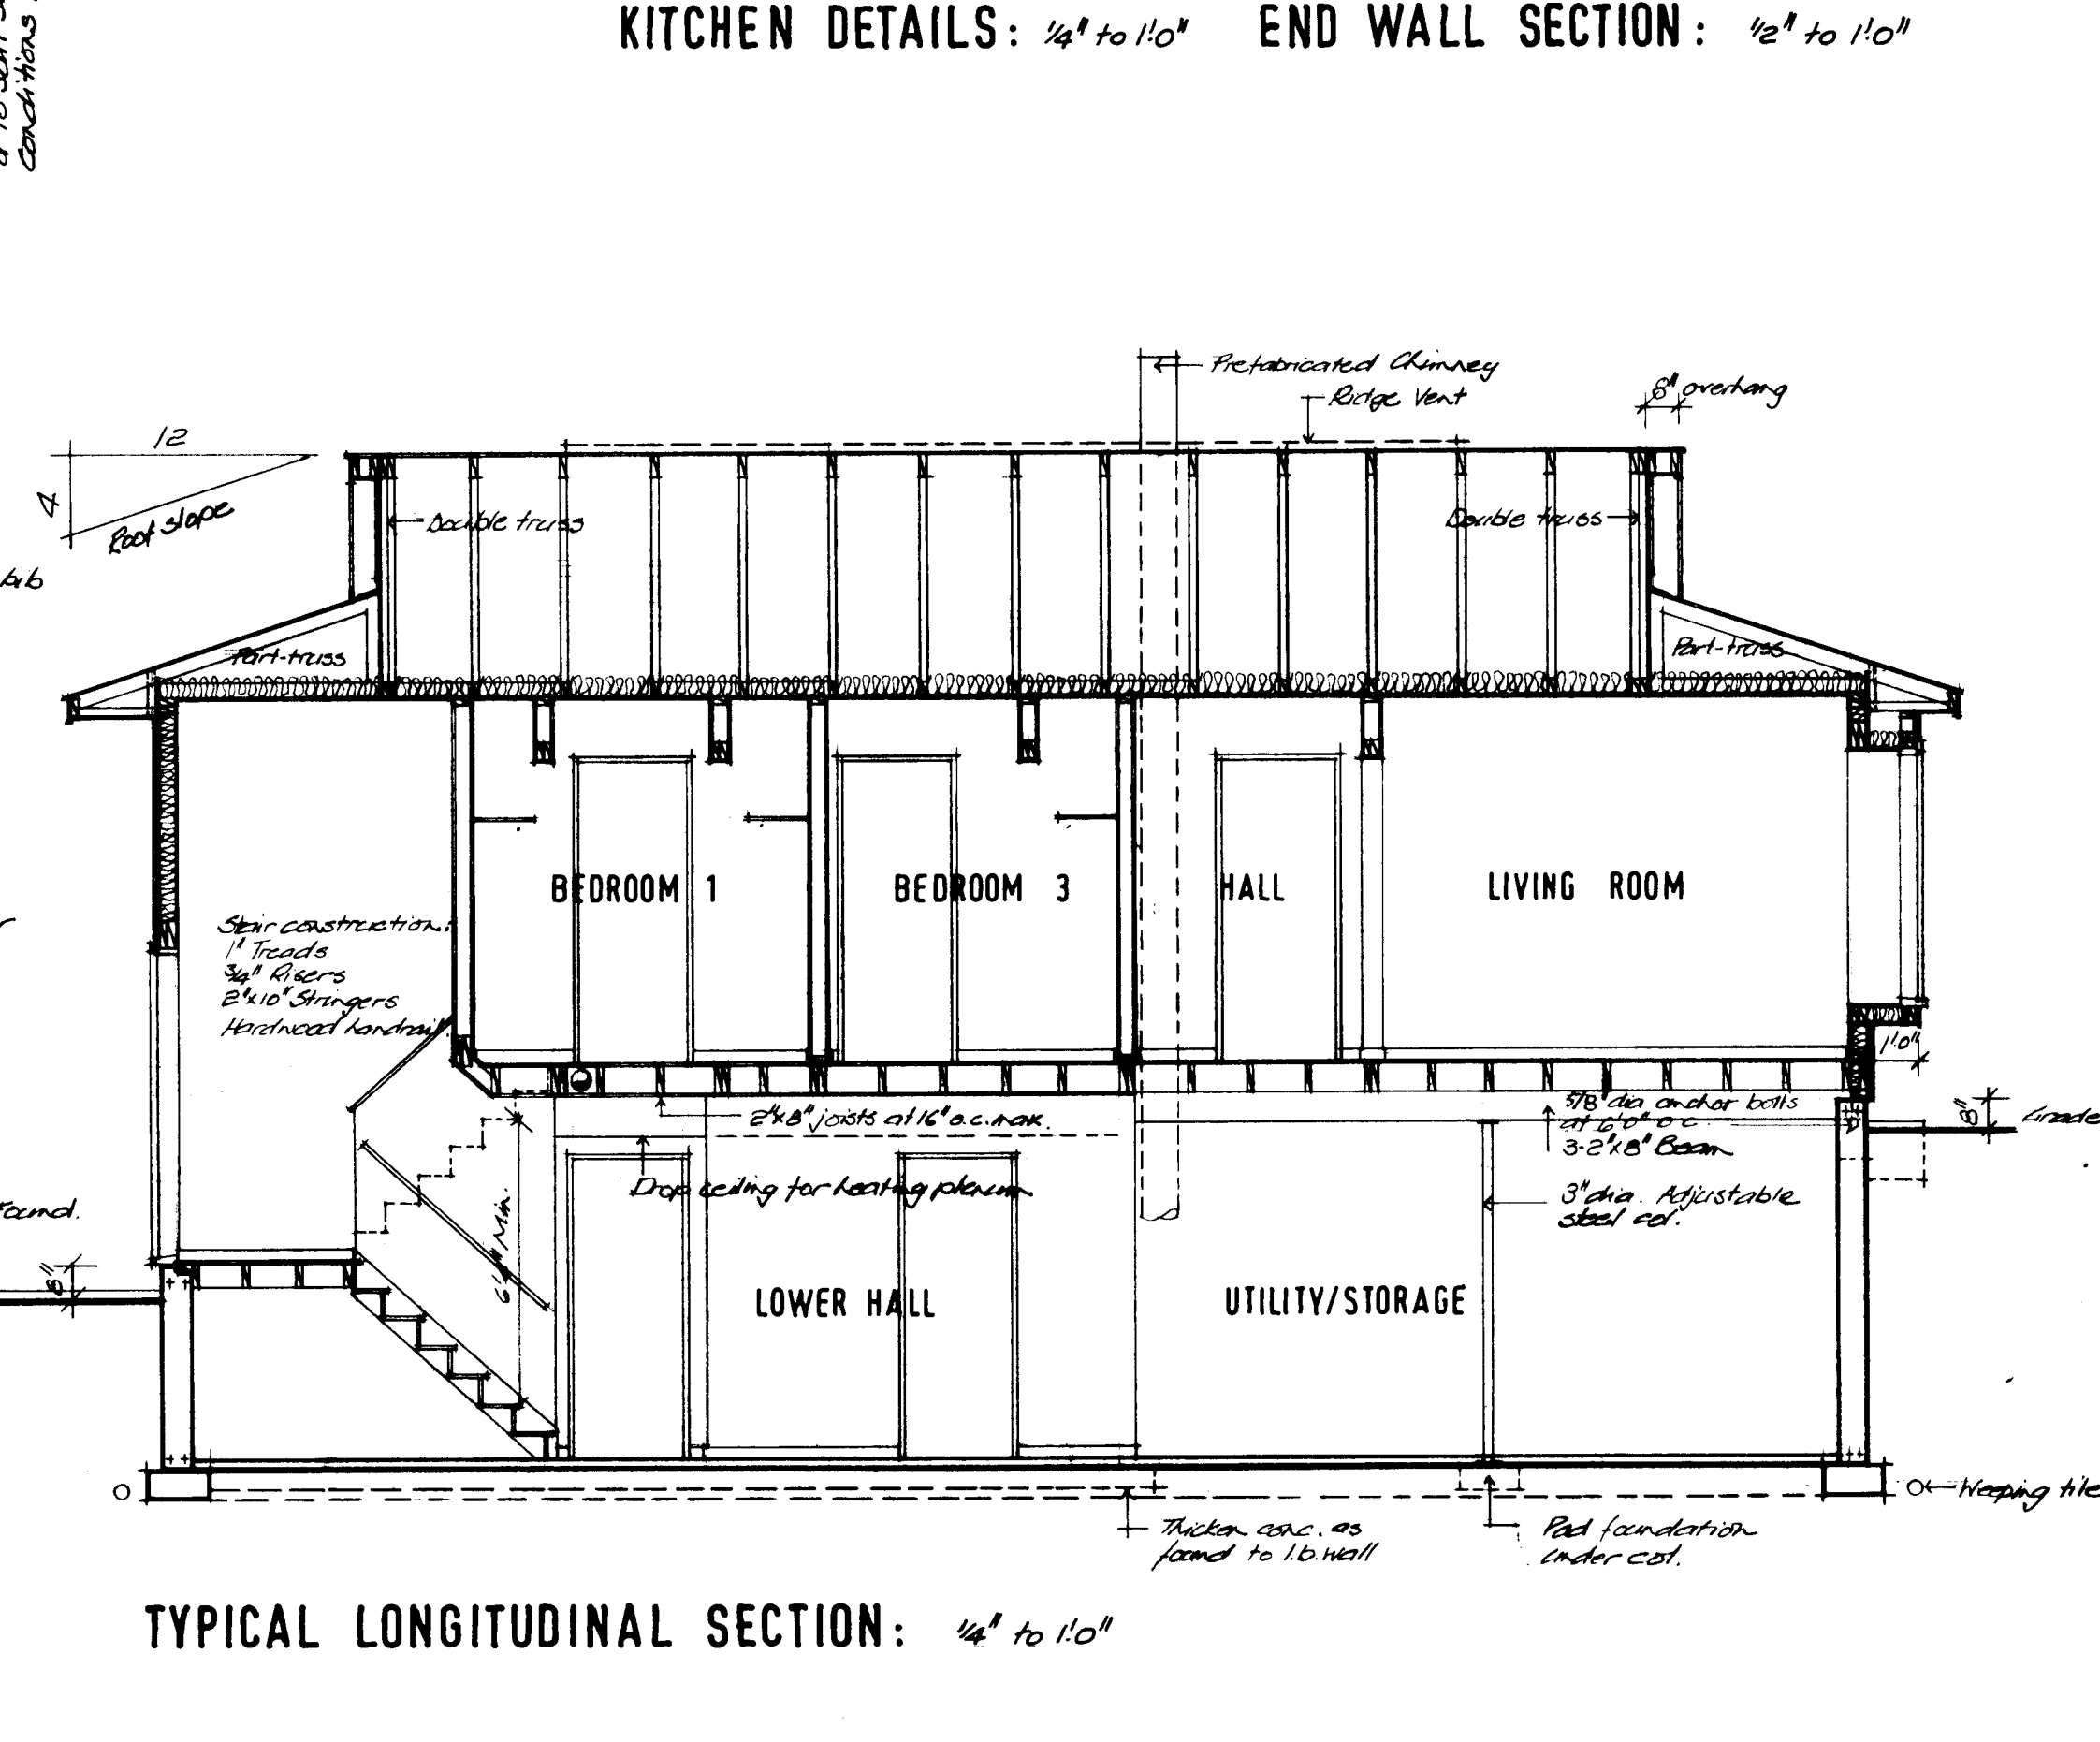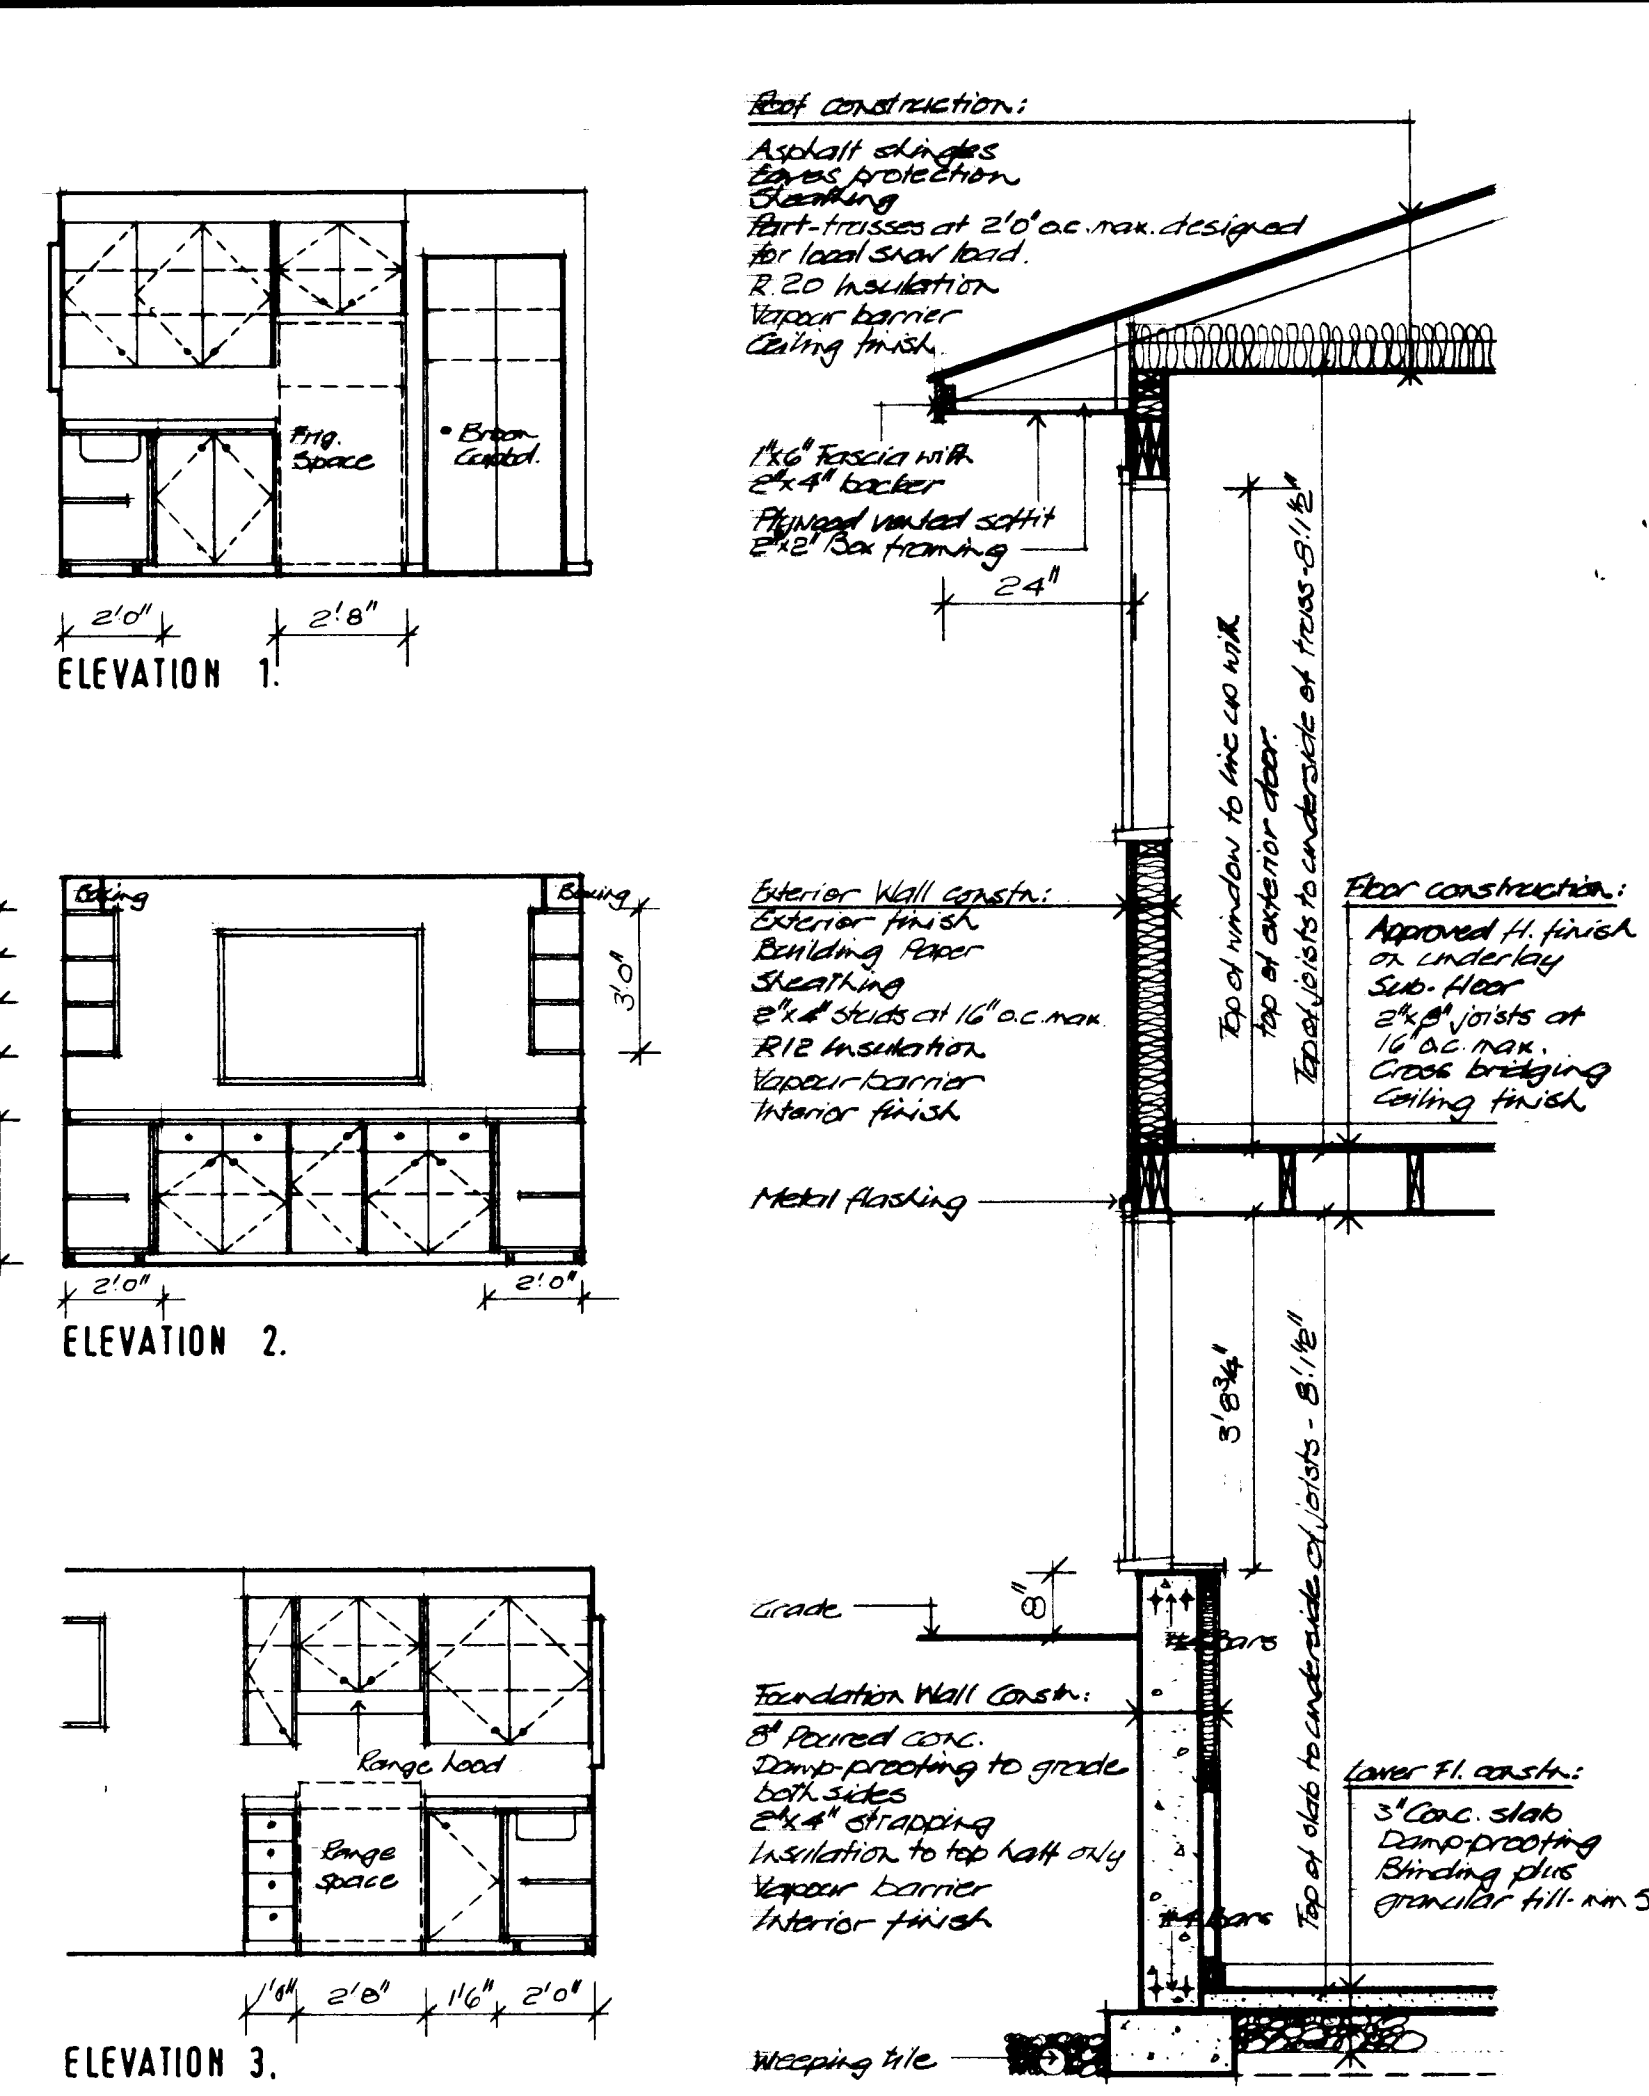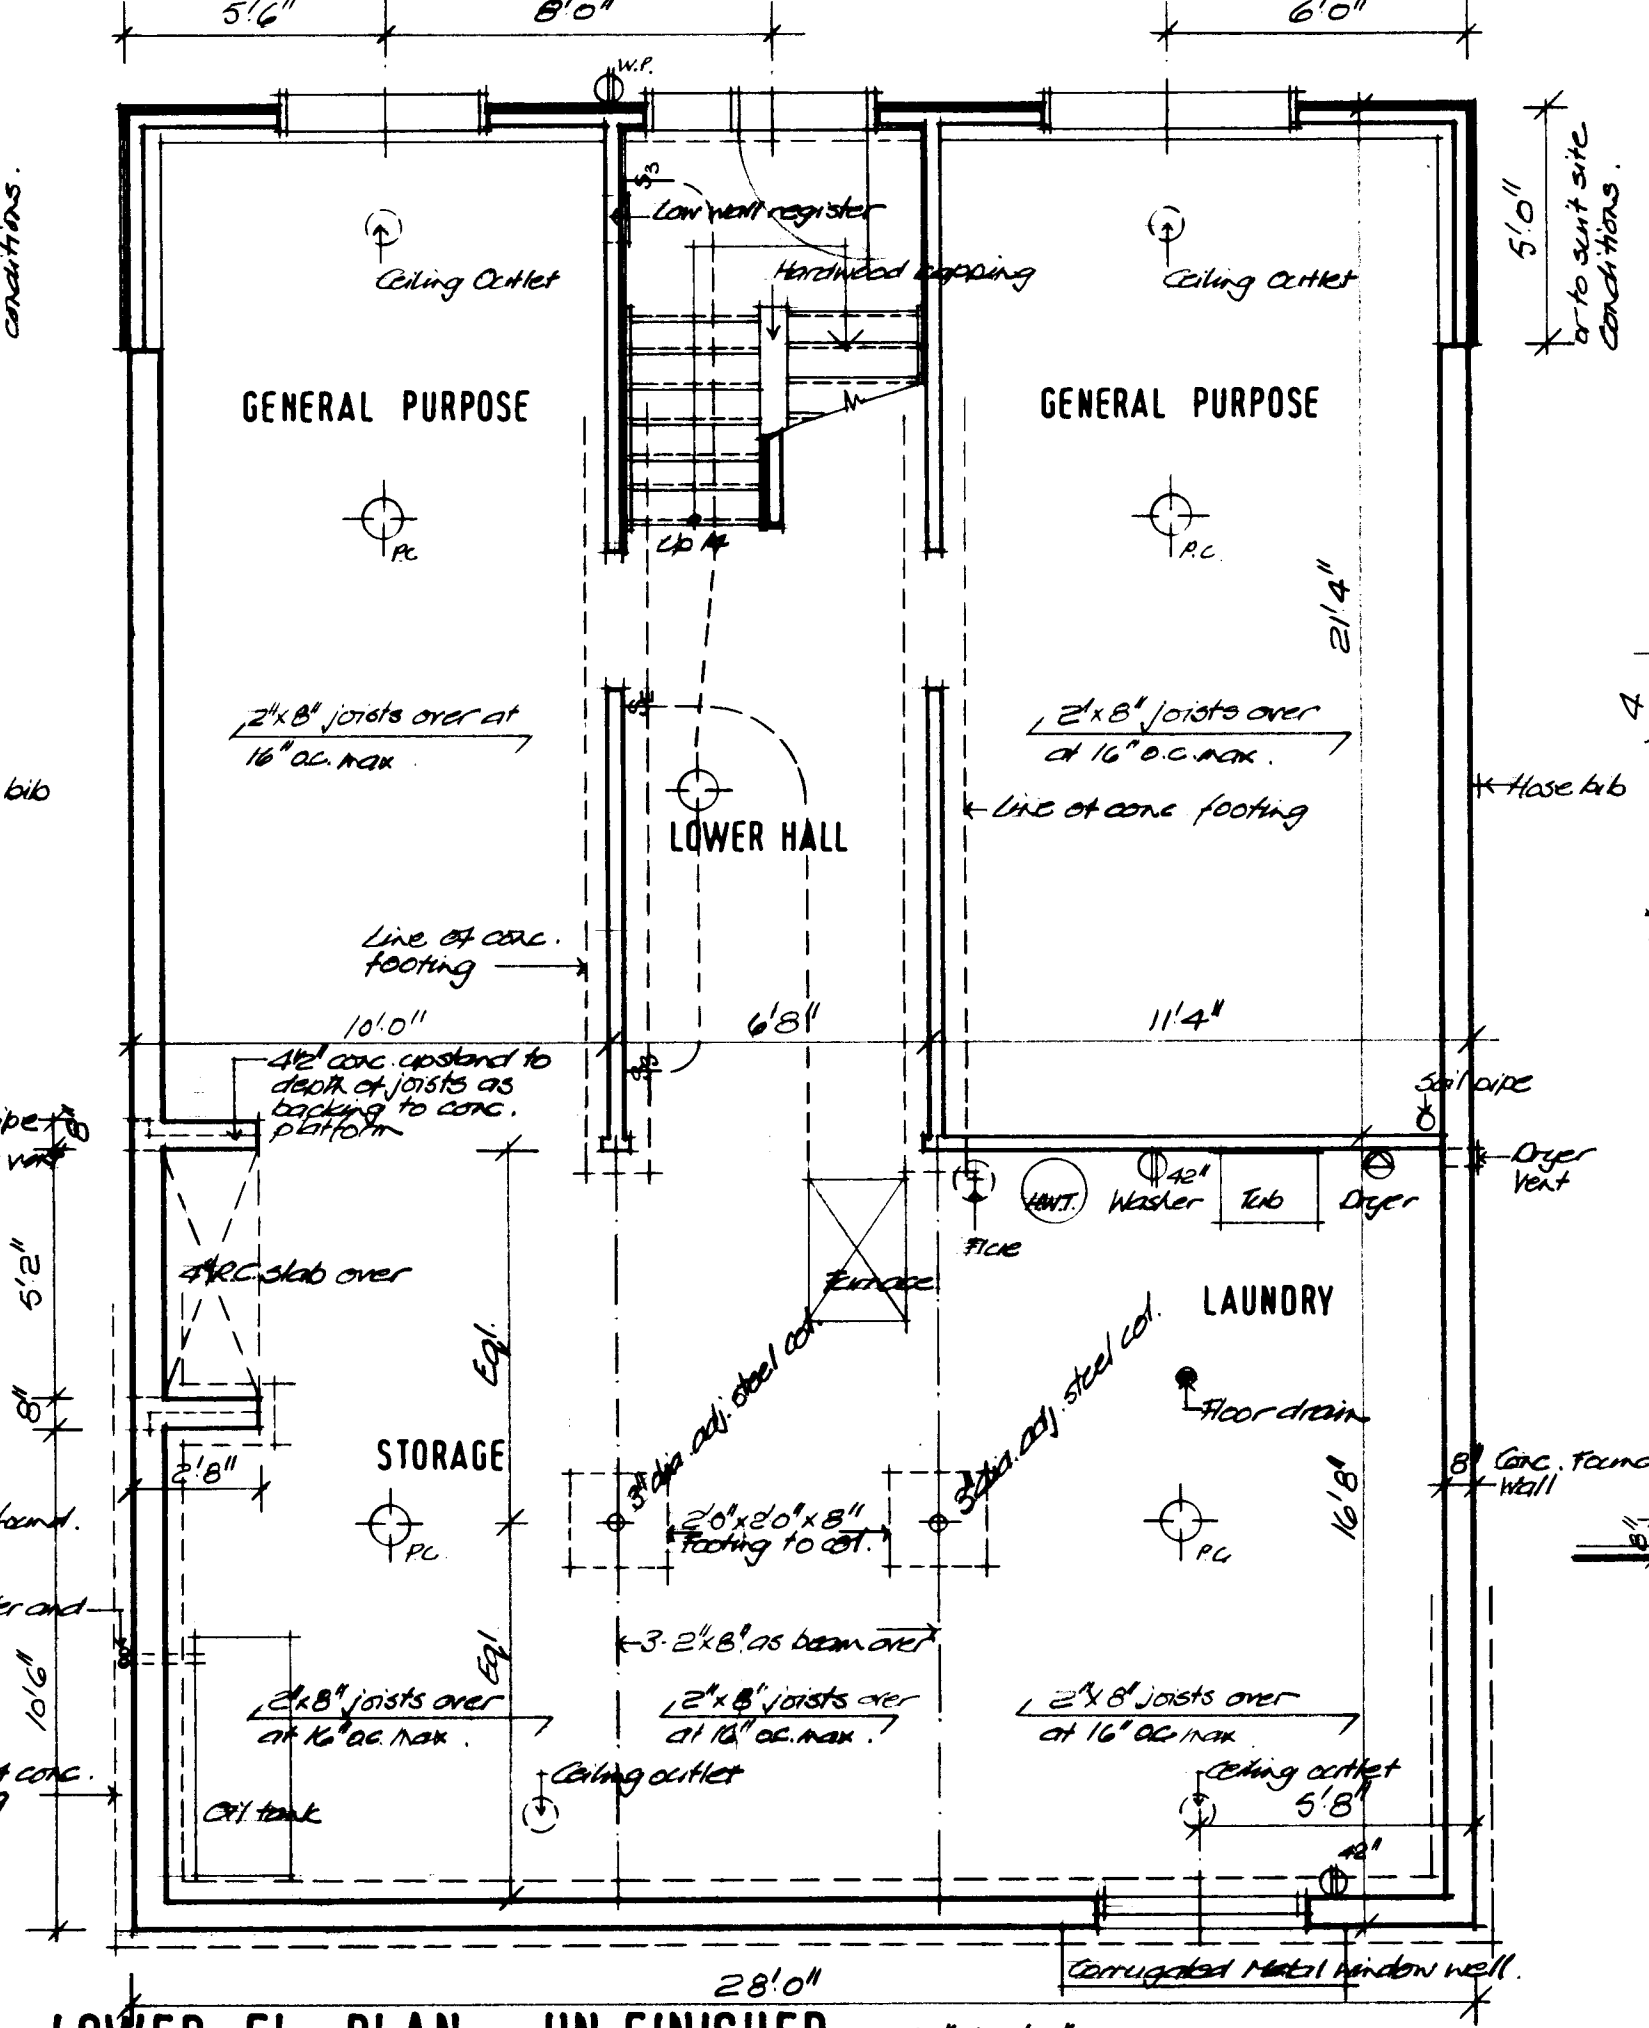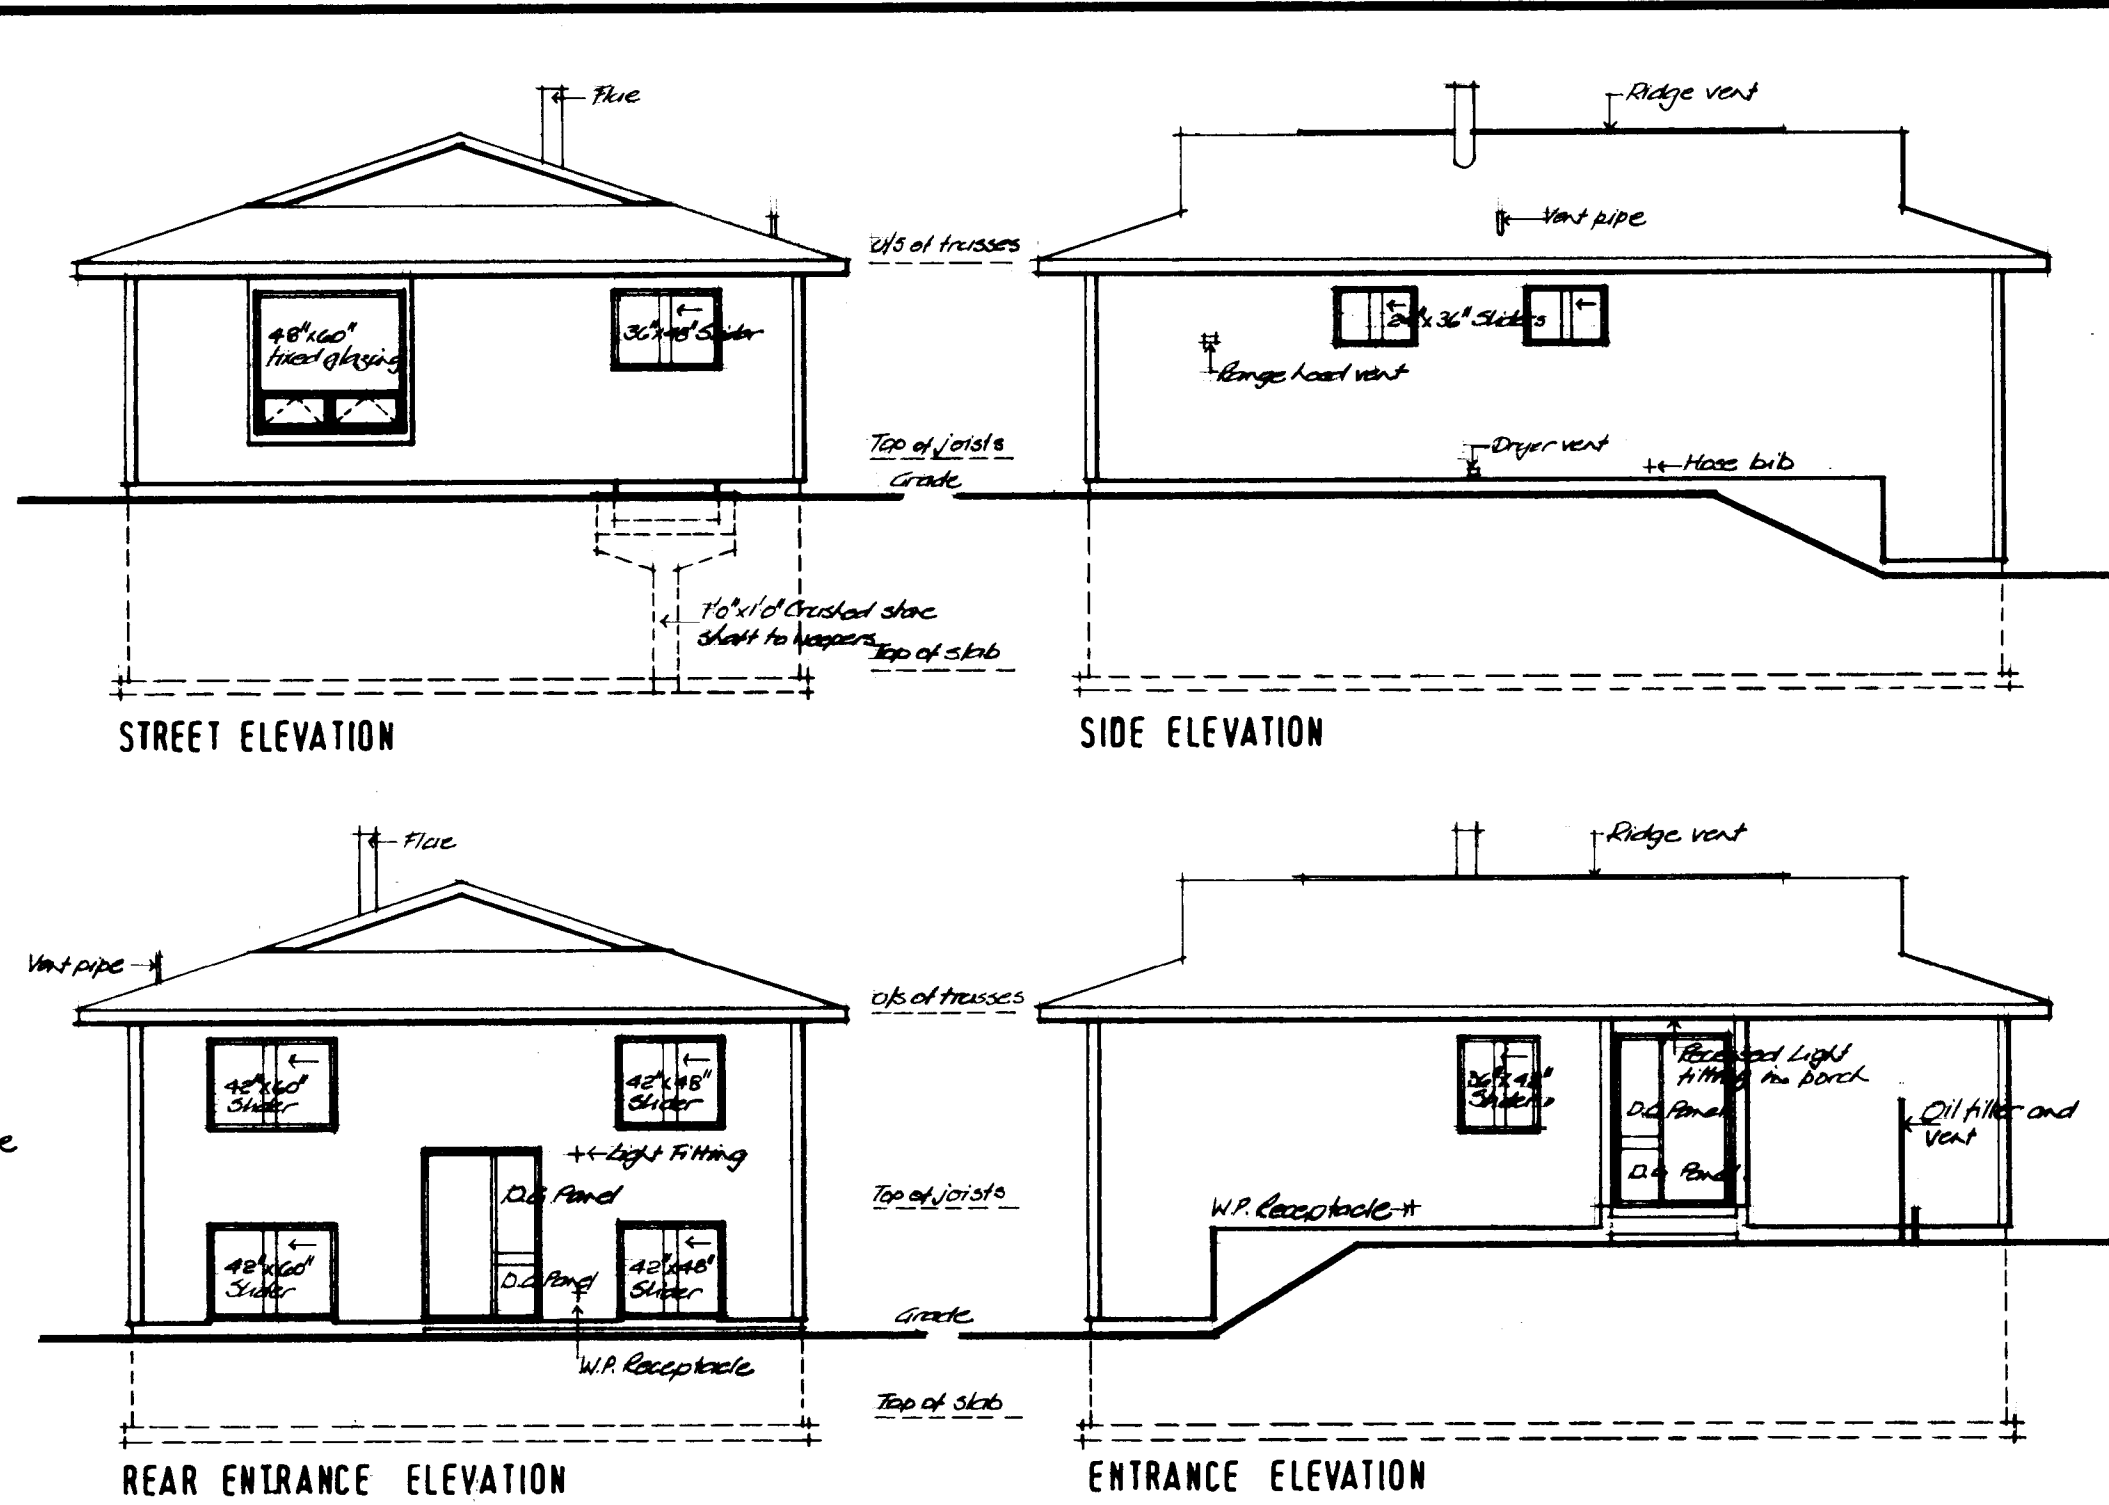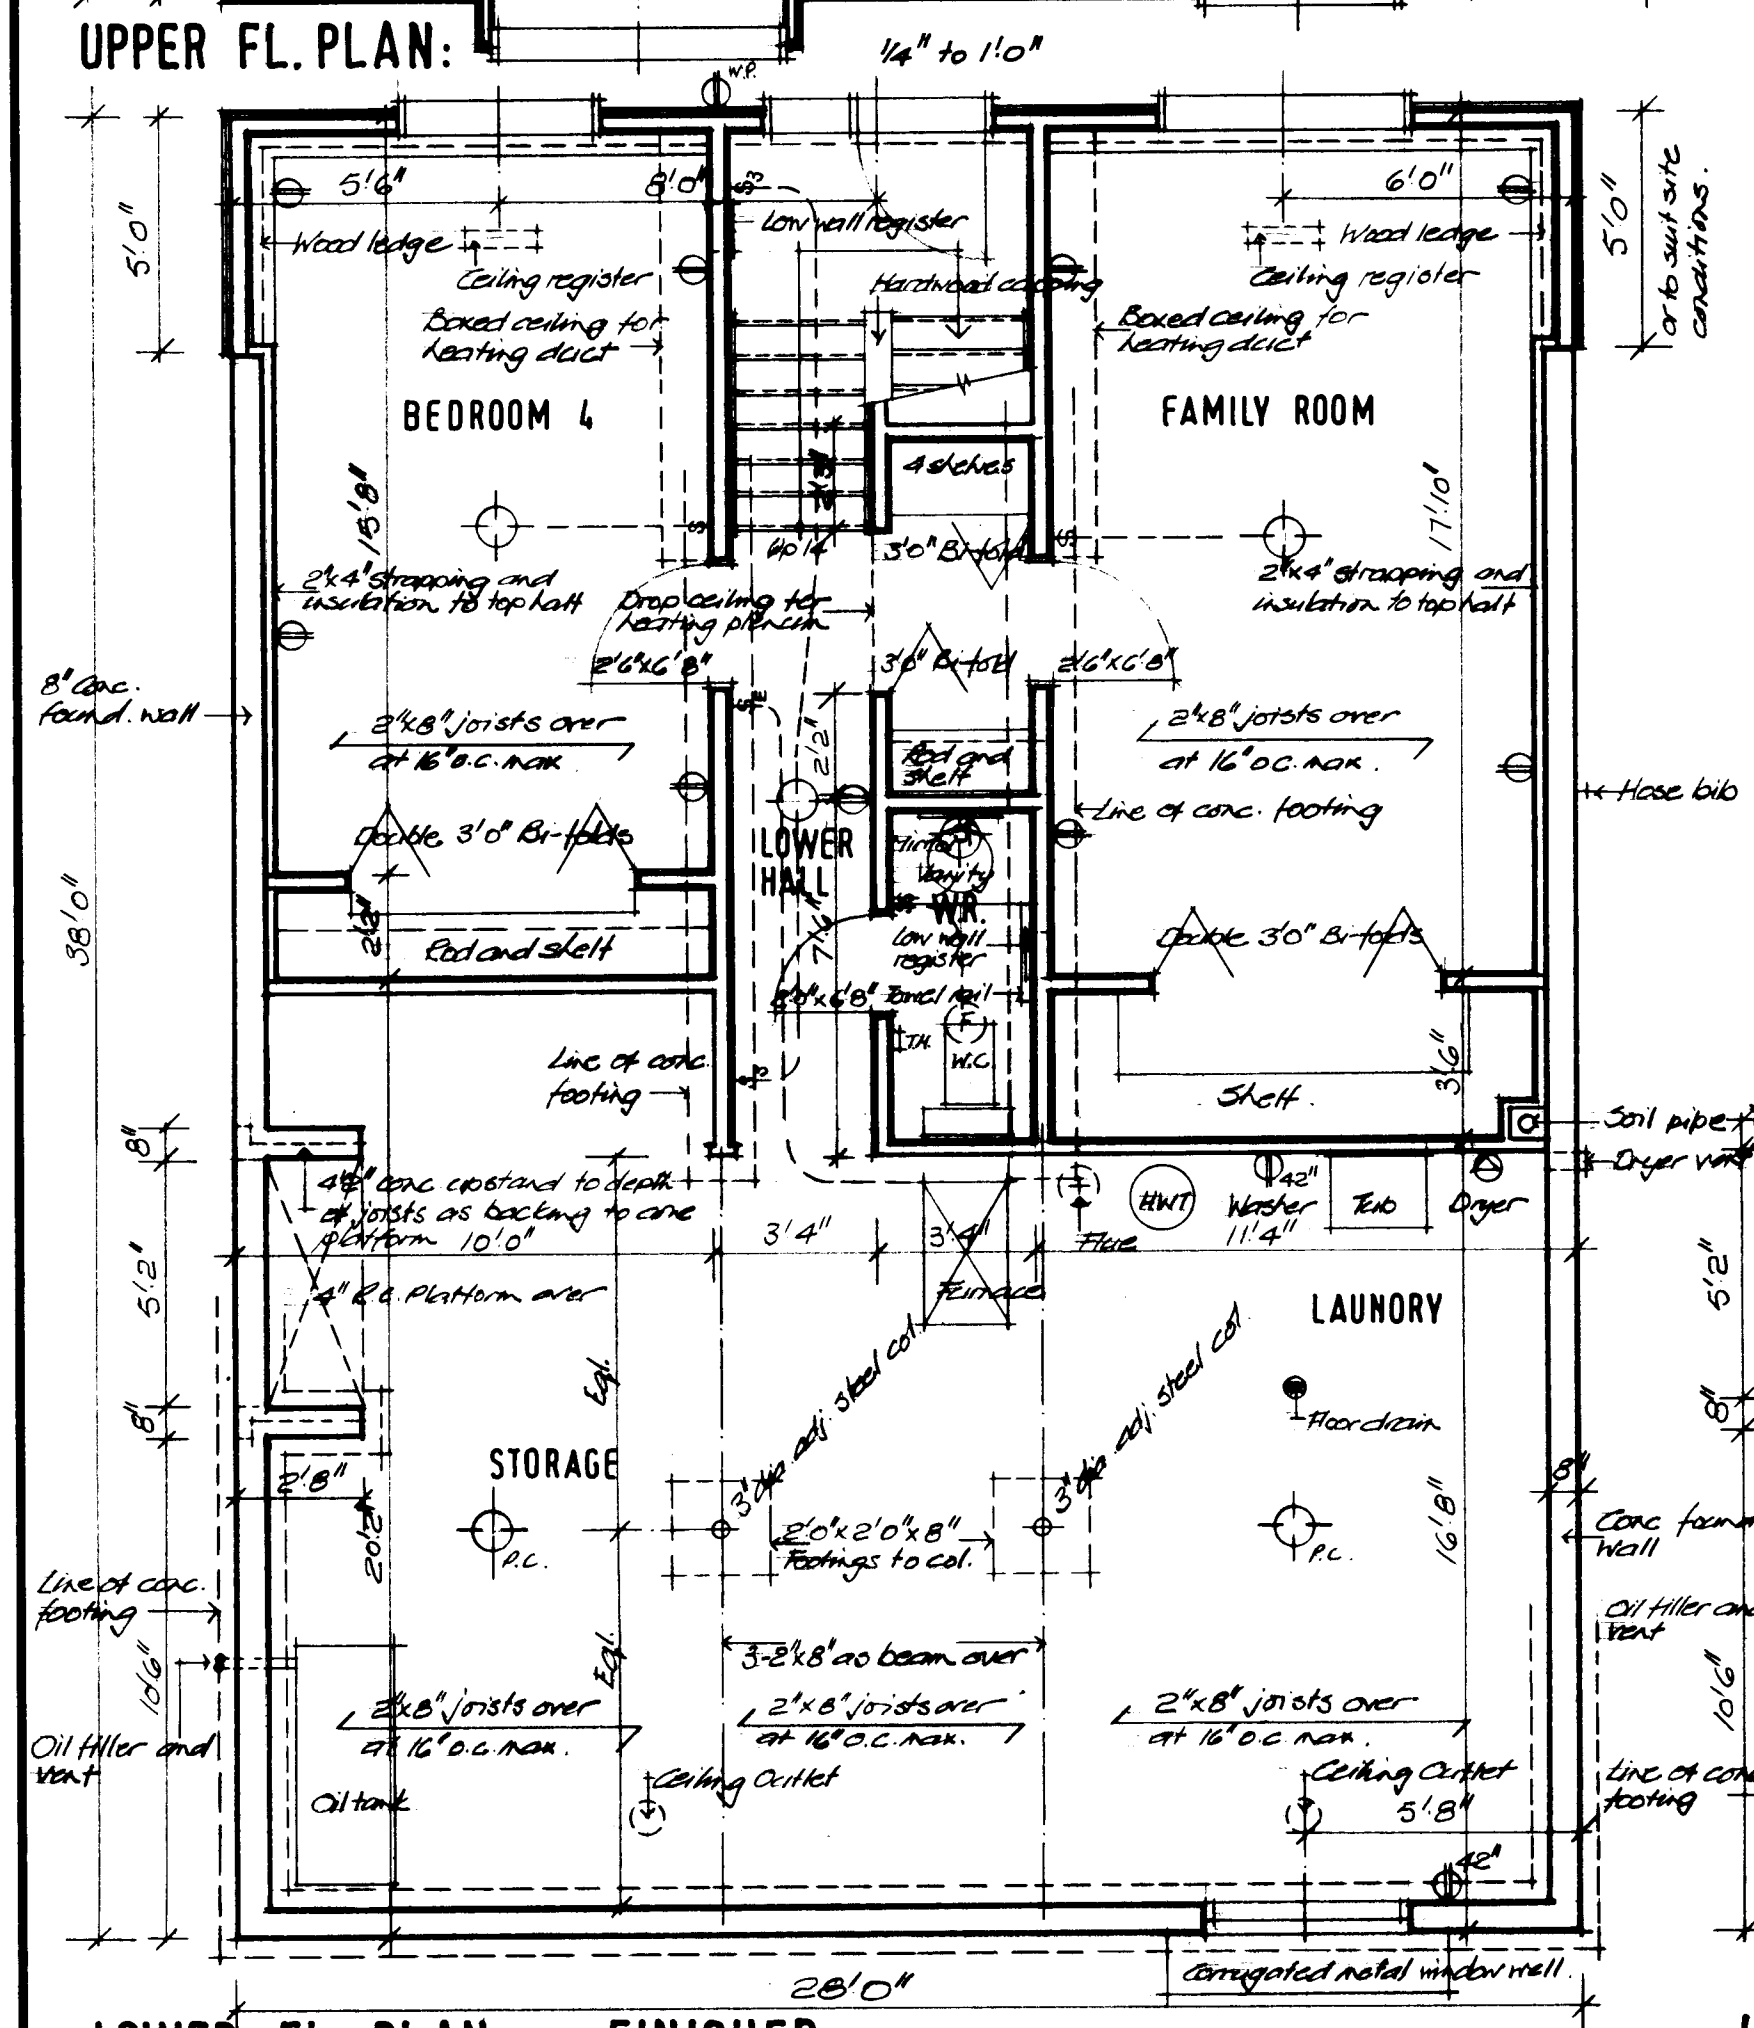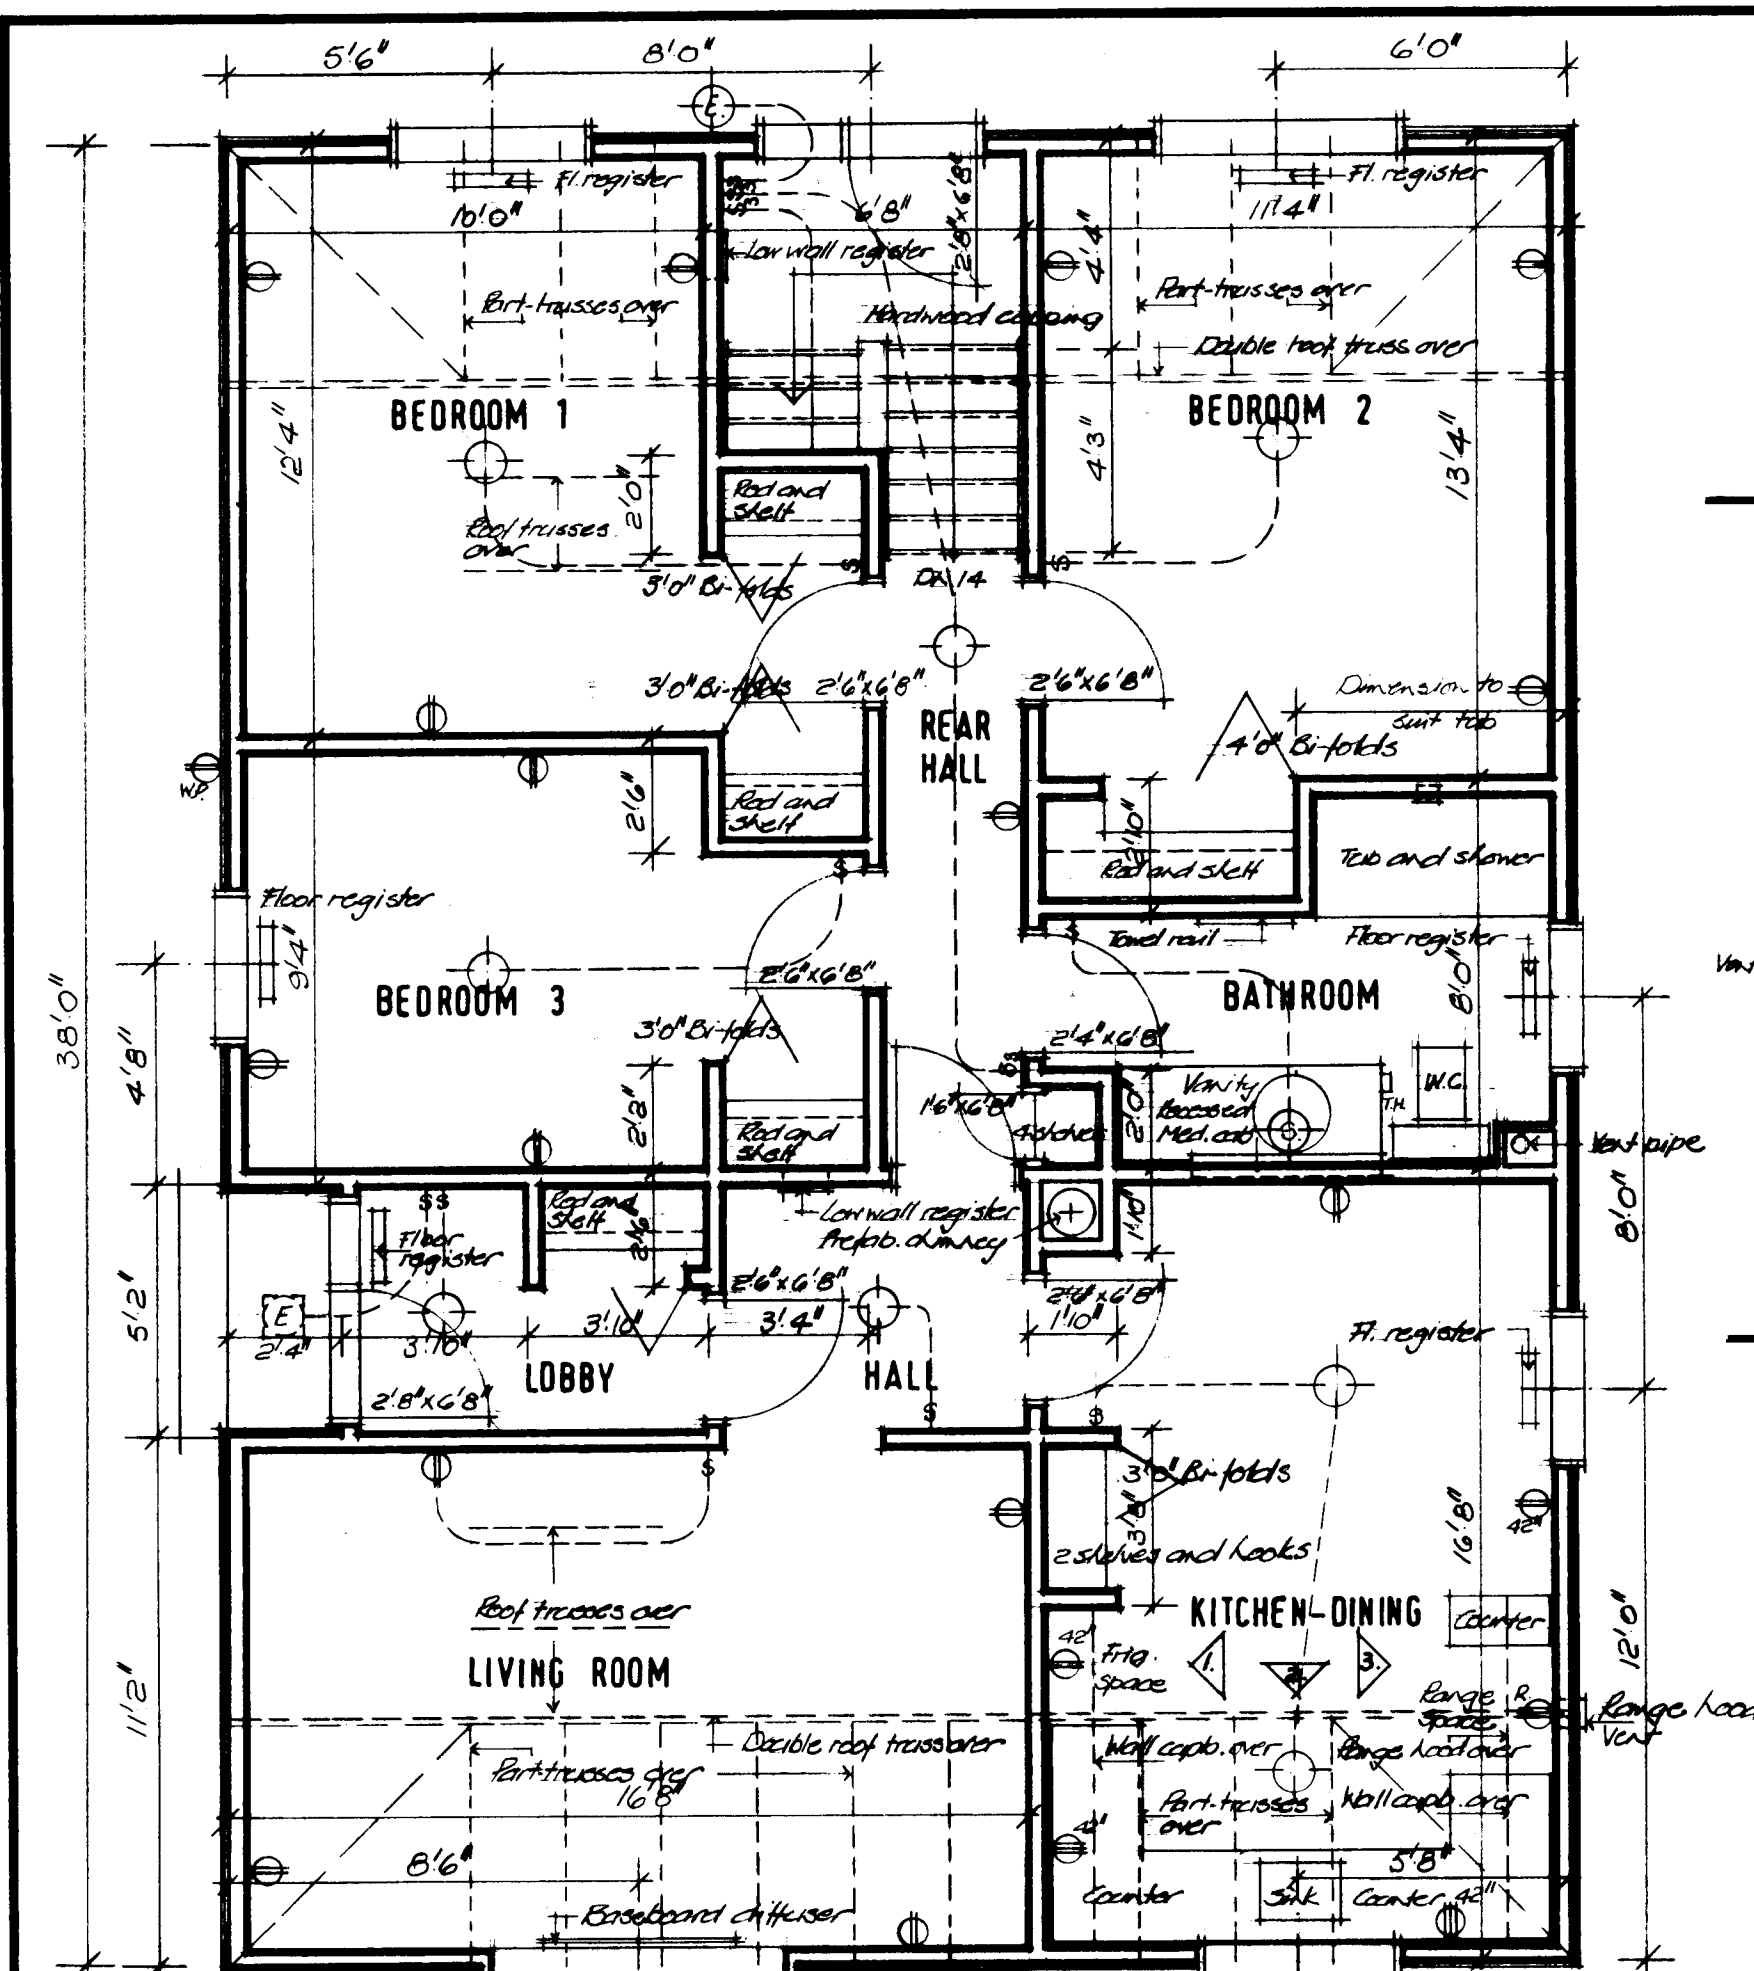

GENERAL NOTES

- ALL FOOTINGS AND FOUNDATIONS SHALL BE TAKEN DOWN TO SOLID BEARING AND BELOW THE ACCEPTED LOCAL FROST PENETRATION LINE. FOOTINGS AND FOUNDATIONS MAY HAVE TO BE INCREASED TO SUIT EXISTING SOIL CONDITIONS.
- DOUBLED JOISTS REQUIRED UNDER PARTITIONS RUNNING PARALLEL TO THE FLOOR JOISTS MAY BE BLOCKED APART 8" AT 4'-0" O.C. TO PERMIT THE PASSAGE OF HEATING DUCTS ETC.
- FOR ORDINARY LOADING CONDITIONS, WOOD LINTELS OVER DOORS, WINDOWS ETC. IN EXTERIOR AND INTERIOR WALLS SHALL BE PLACED ON EDGE.
- THE POSITION AND NUMBER OF ELECTRICAL OUTLETS MAY BE RE-LOCATED BUT MUST IN ALL CASES MEET THE MINIMUM REQUIREMENTS OF THE HOUSING STANDARDS AND COMPLY WITH LOCAL CODES.
- PROVIDE A SHELF AND ROD IN THE COAT AND CLOTHES CLOSETS.
- ADDITIONAL INSULATING MATERIAL MAY BE NECESSARY IN CERTAIN LOCALITIES TO PROVIDE THE REQUIRED RESISTANCE TO HEAT FLOW FOR SUCH AREA.
- THE STRUCTURAL MEMBERS ARE DESIGNED FOR A LIVE ROOF LOAD OF 15 LBS PER SQUARE FOOT. IN AREAS WHERE A ROOF LOAD IN EXCESS OF THE DESIGN LOAD IS EXPECTED, IT WILL BE NECESSARY TO REDESIGN THE STRUCTURAL MEMBERS ACCORDINGLY.
- ALL STRUCTURAL MEMBERS WILL BE CONSTRUCTION GRADE AND SPECIES UNLESS OTHERWISE NOTED ON THE DRAWINGS.

Roof construction:
Asphalt shingles
2x4 trusses at 2'0" o.c. max. designed for local snow load.
7/16" insulation
Vapor barrier
Ceiling finish.

Exterior Wall construction:
Approved 1/2" finished 2x4 studs at 16" o.c. max.
8/16" insulation
Vapor barrier
Interior finish.

Floor construction:
Approved 1/2" finished 2x4 sub-floor
2x8 joists at 16" o.c. max.
Cork bridging
Ceiling finish.







Foundation Wall construction:
8" poured concrete
Damp-proofing to grade
both sides
2x4" strapping
Insulation to top half only
Vapor barrier
Interior finish.

Lower fl. construction:
5" concrete slab
Damp-proofing
Bridging plus
granular fill min 5"

Plot Plan

DATE	NHA	STDS	CHKD	BY	DATE	REVISIONS	BY
ARCHITECT							
C.M.H.C.							
DATE							
DESIGN NO.				SHEET NO.			
H-2				1 of 1			

CENTRAL MORTGAGE AND HOUSING CORPORATION

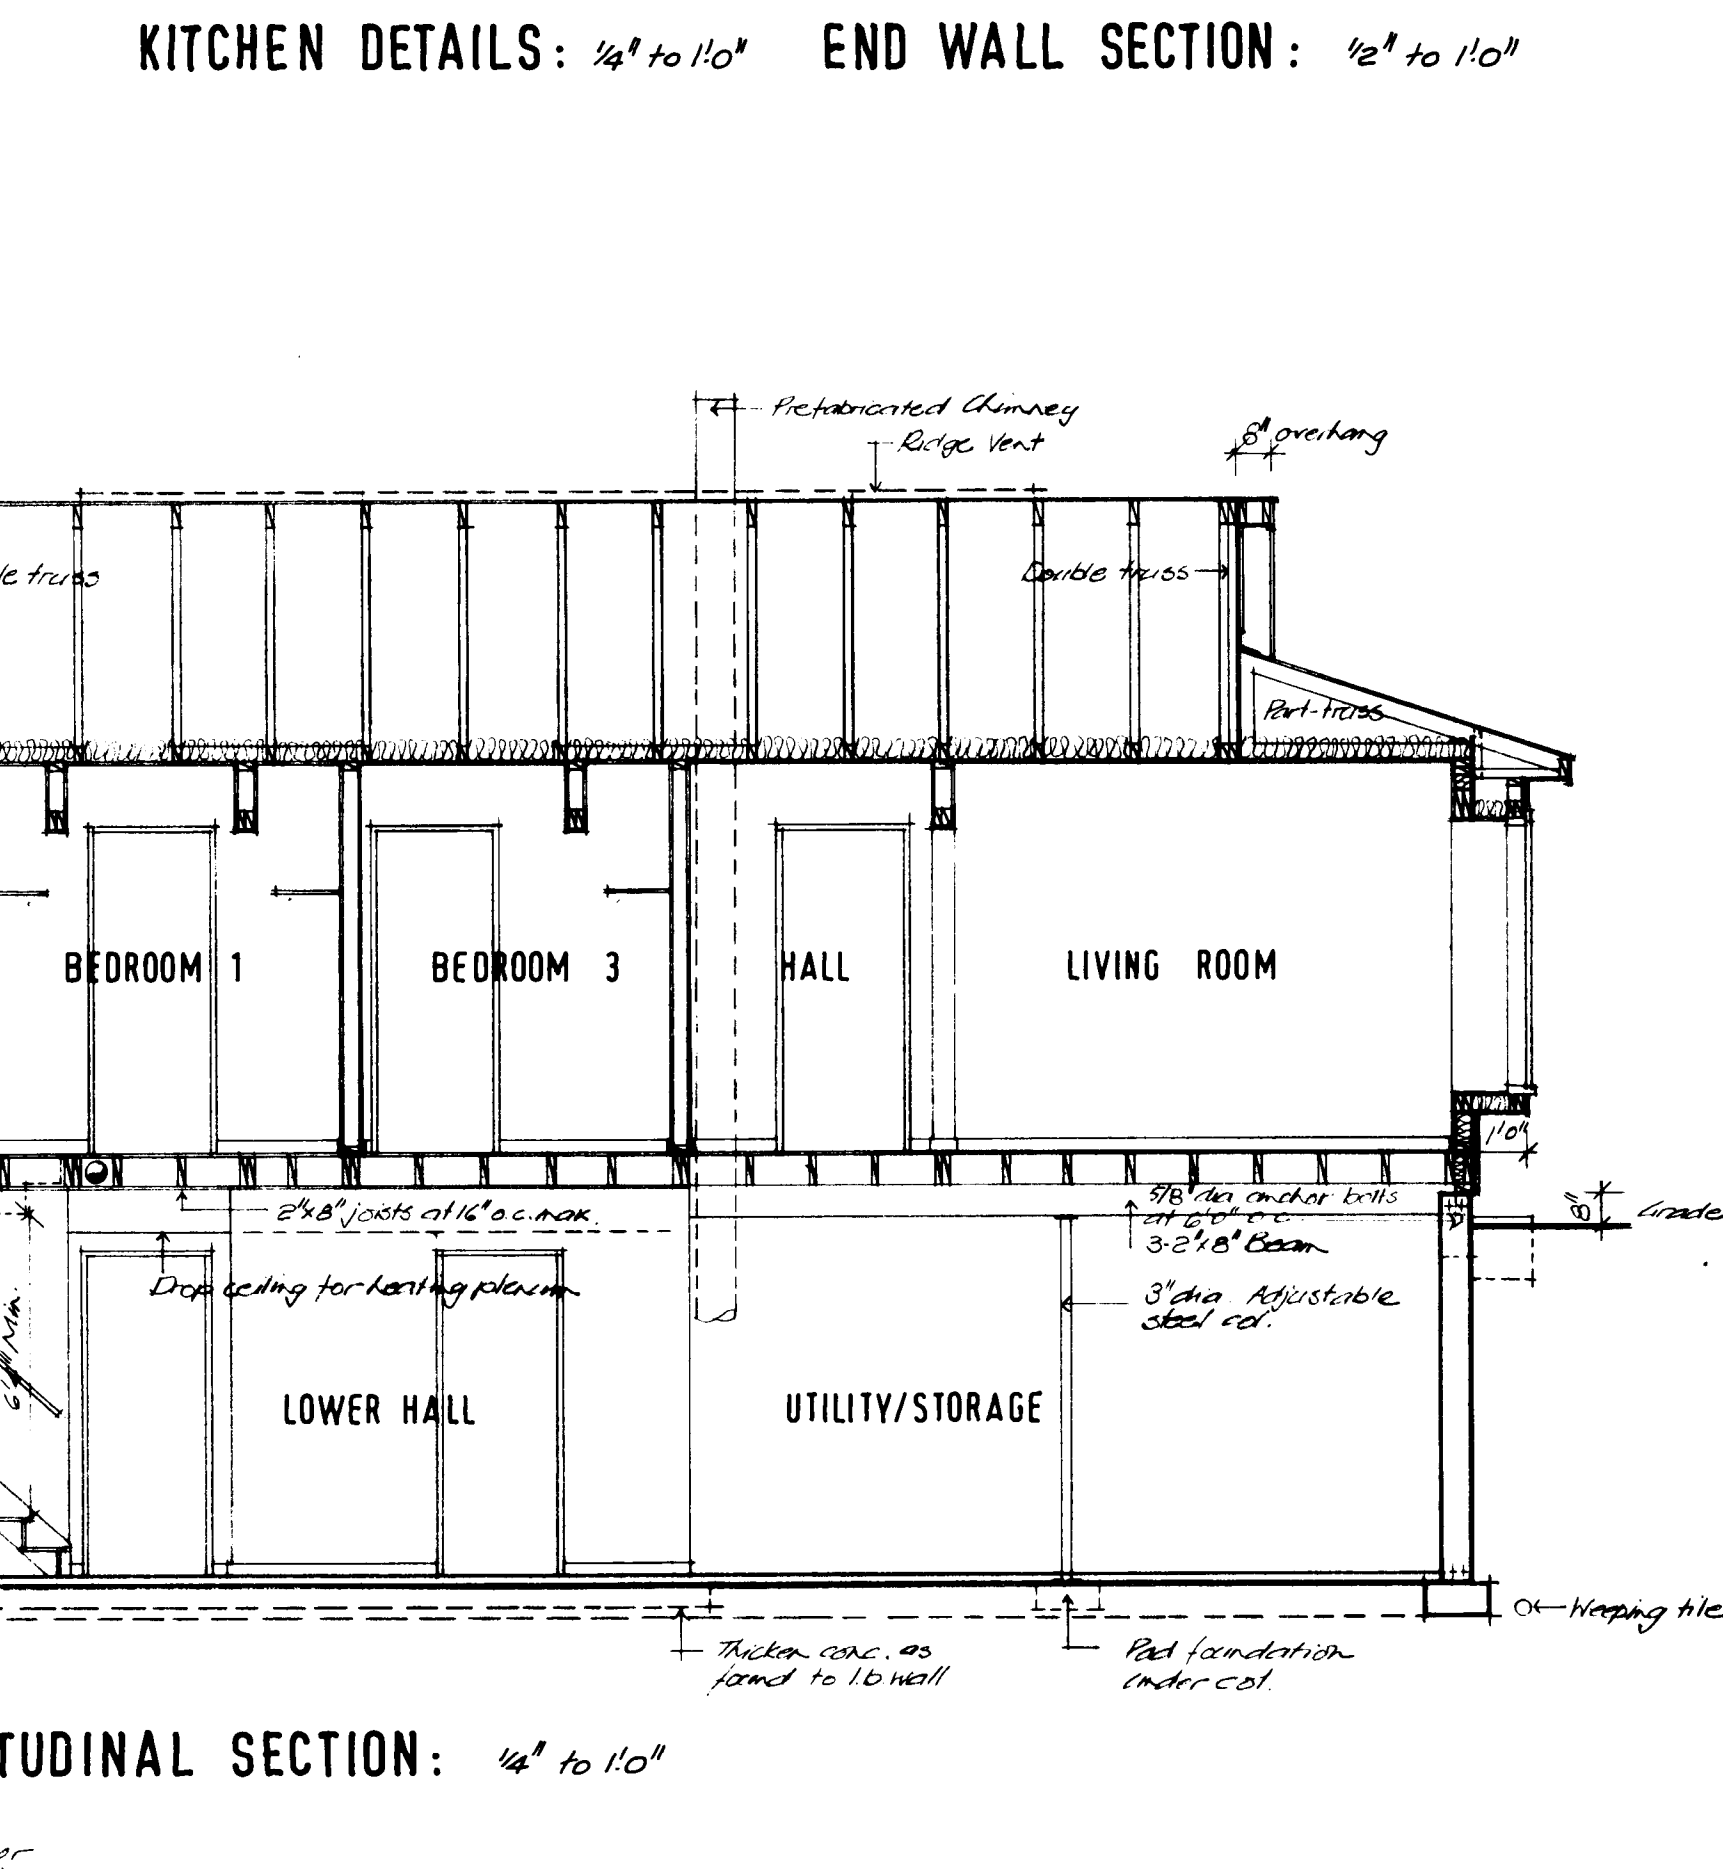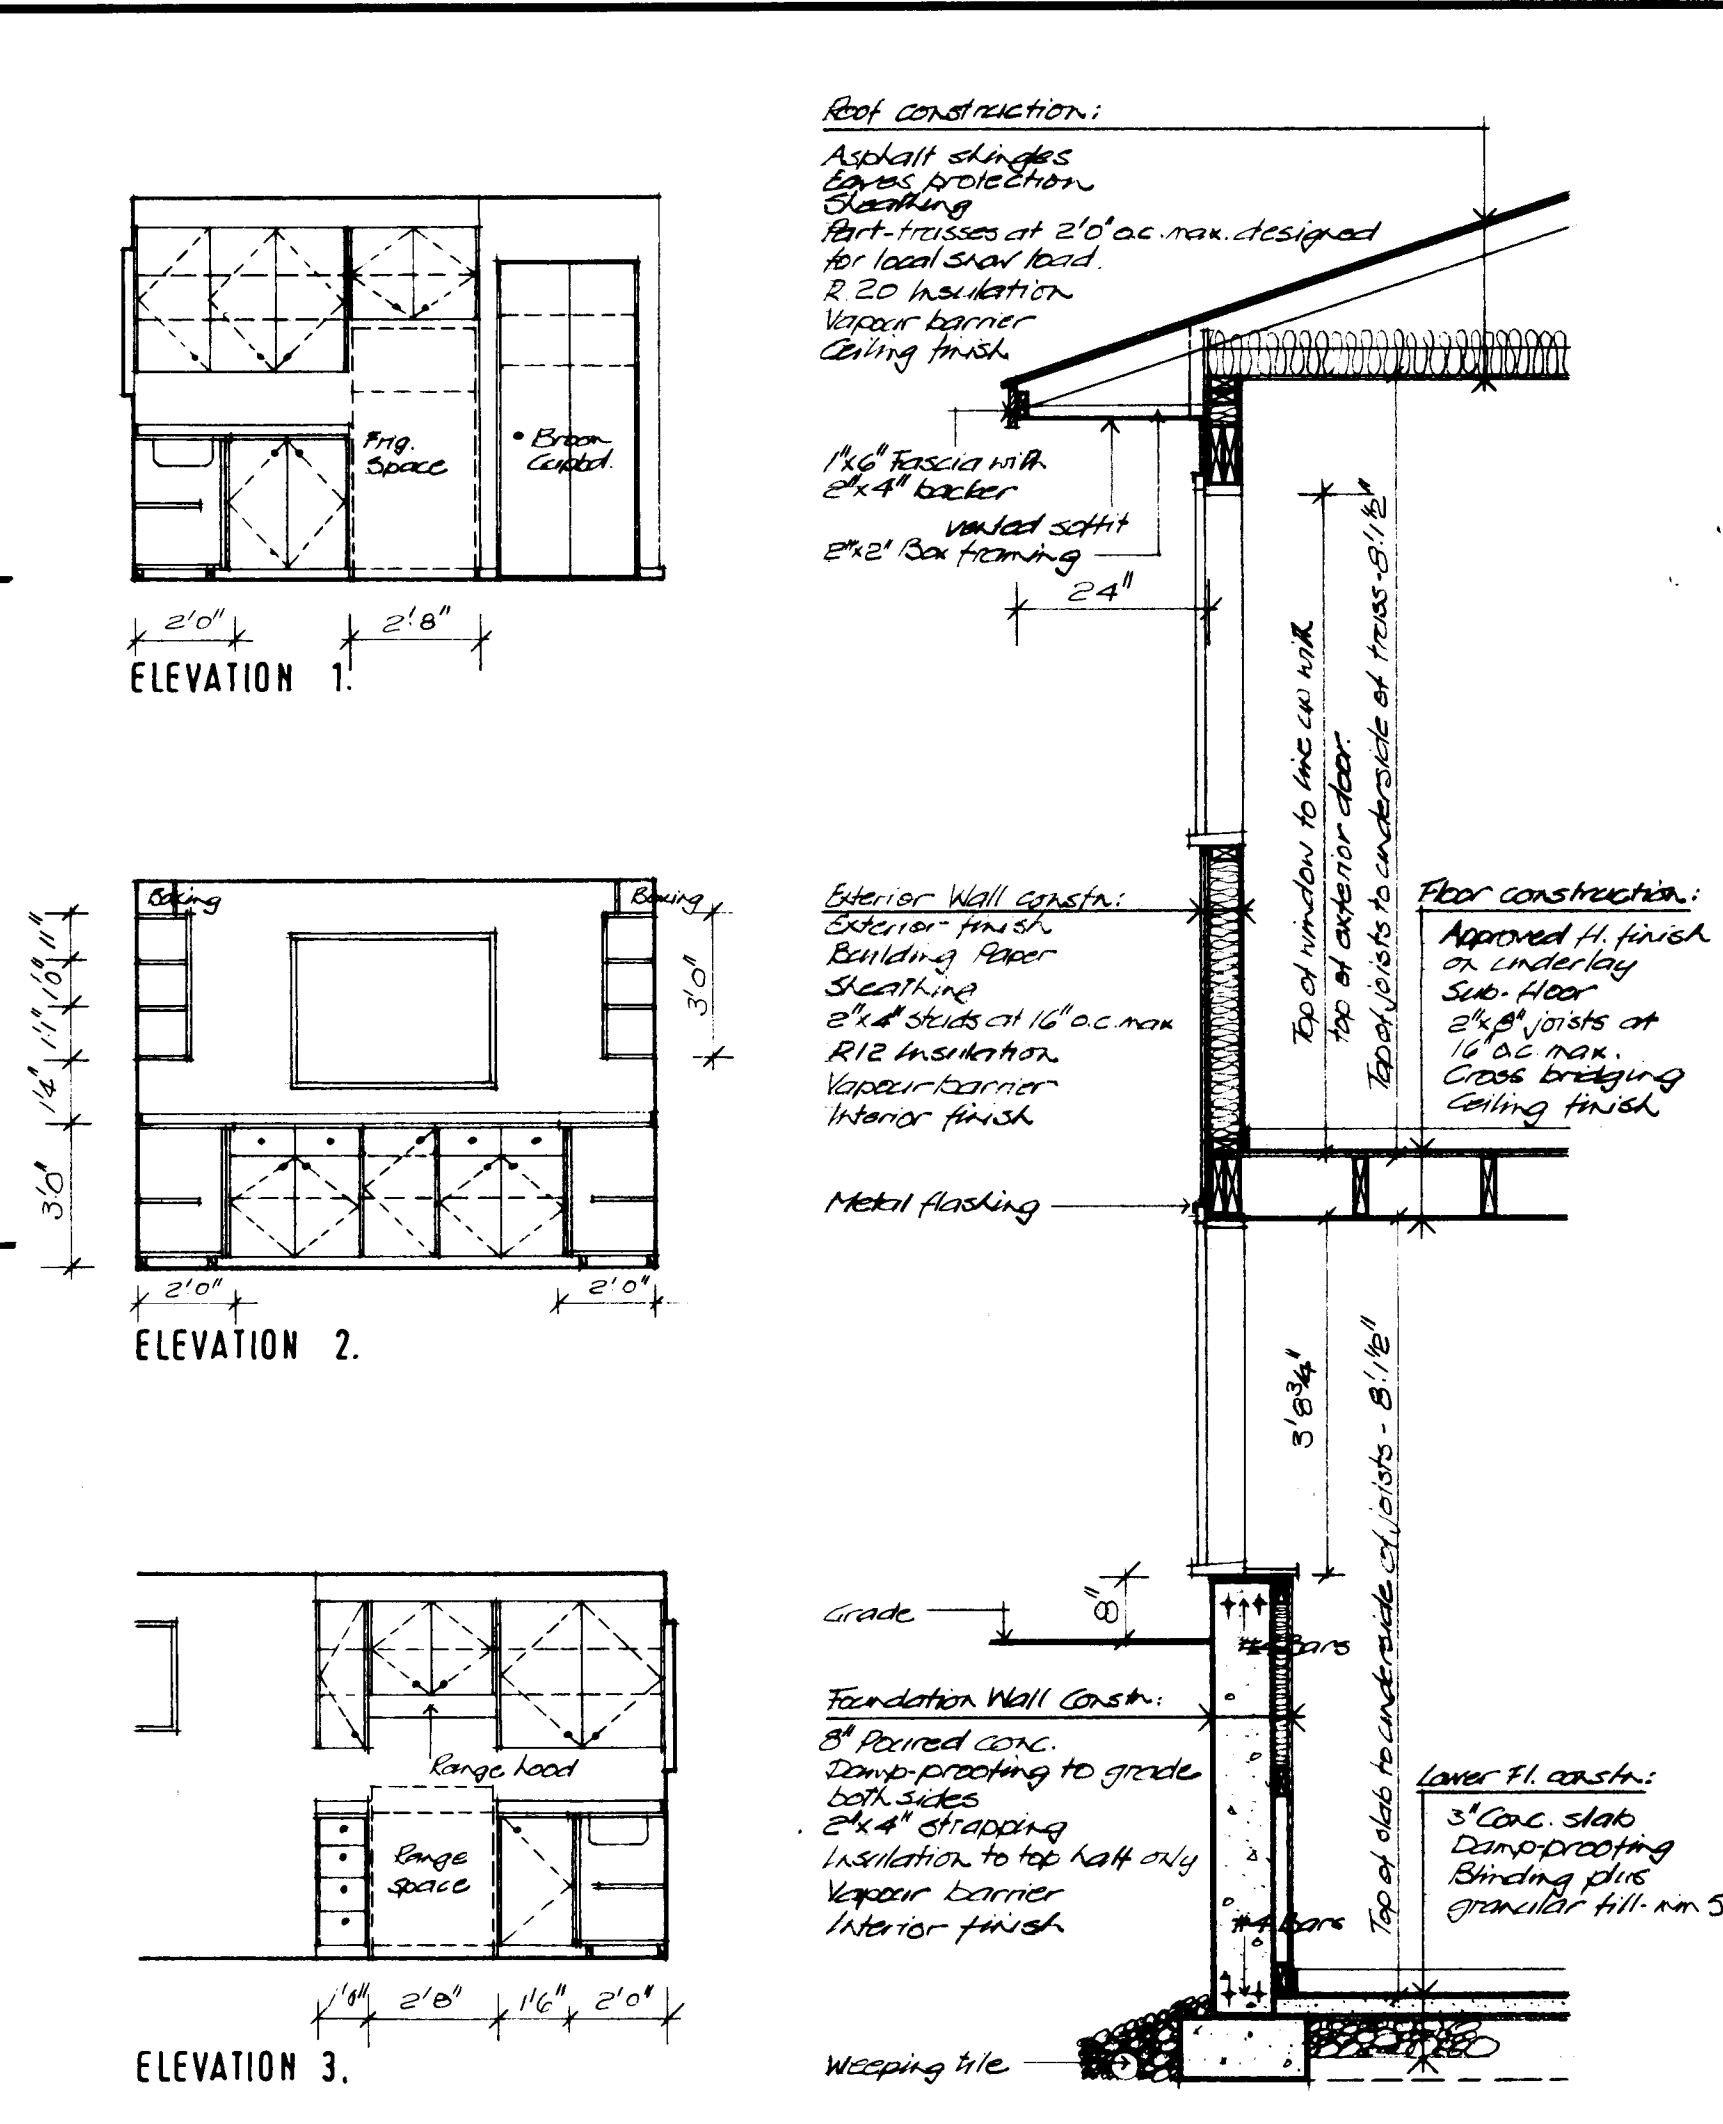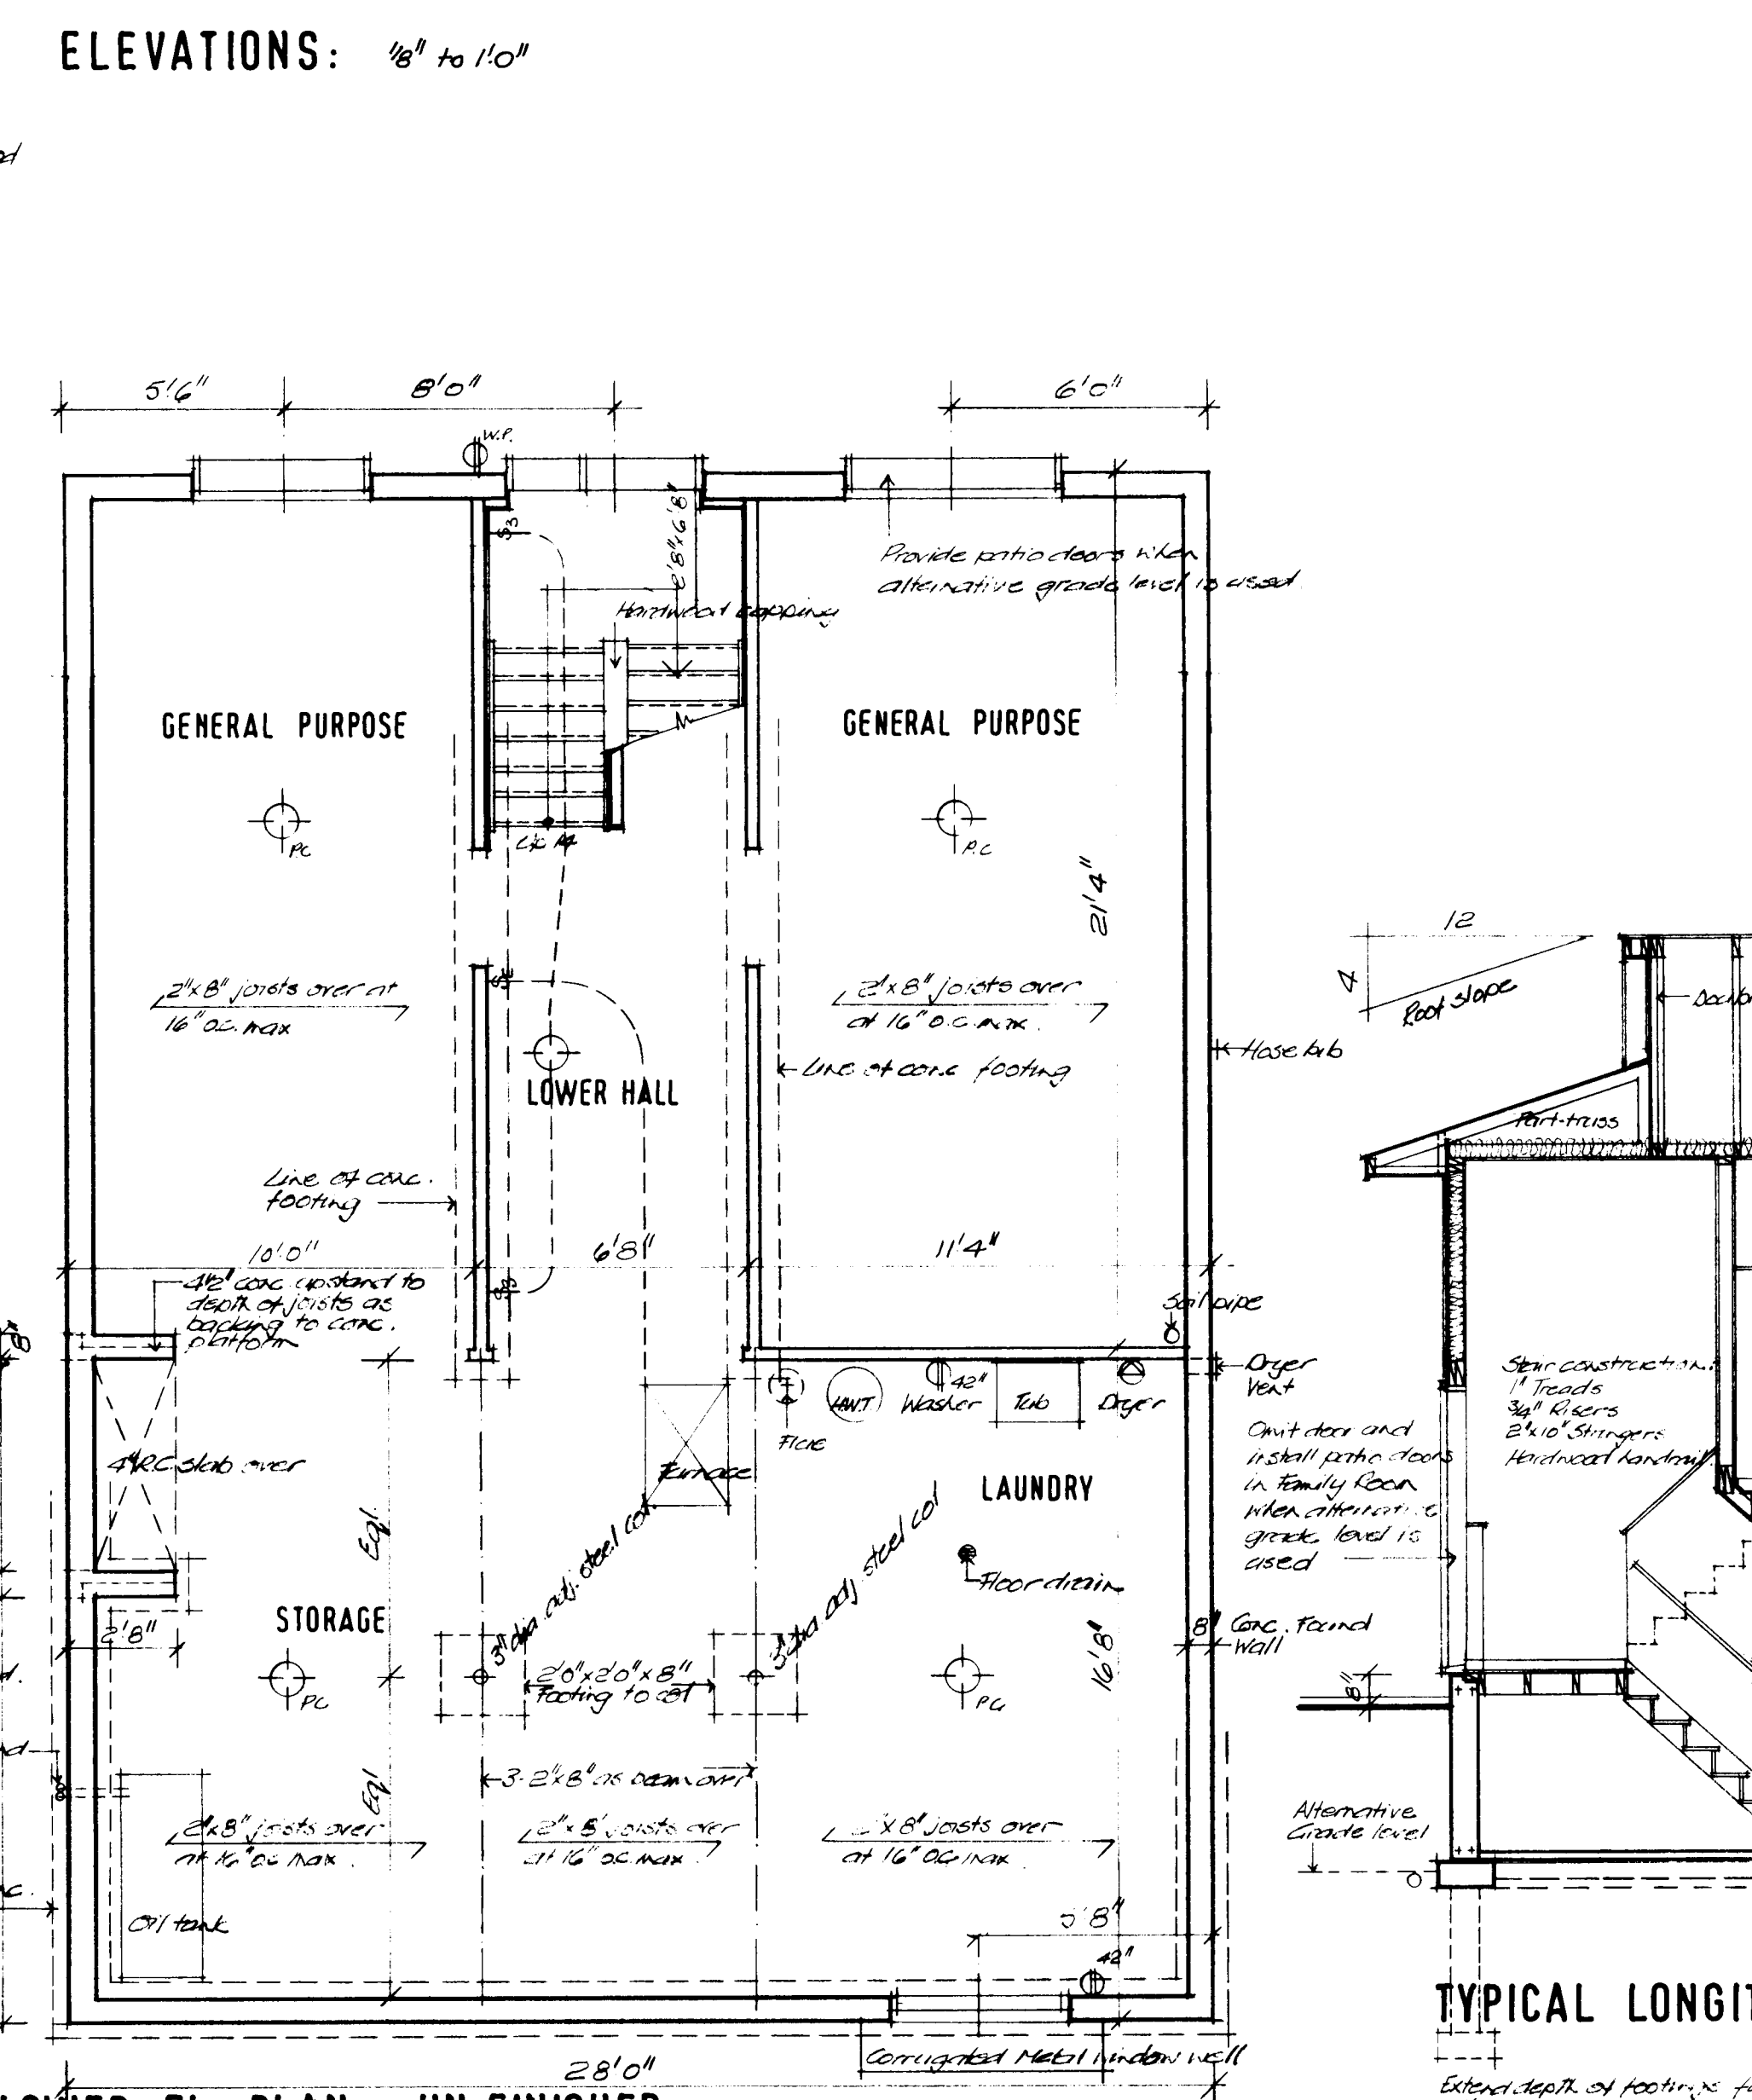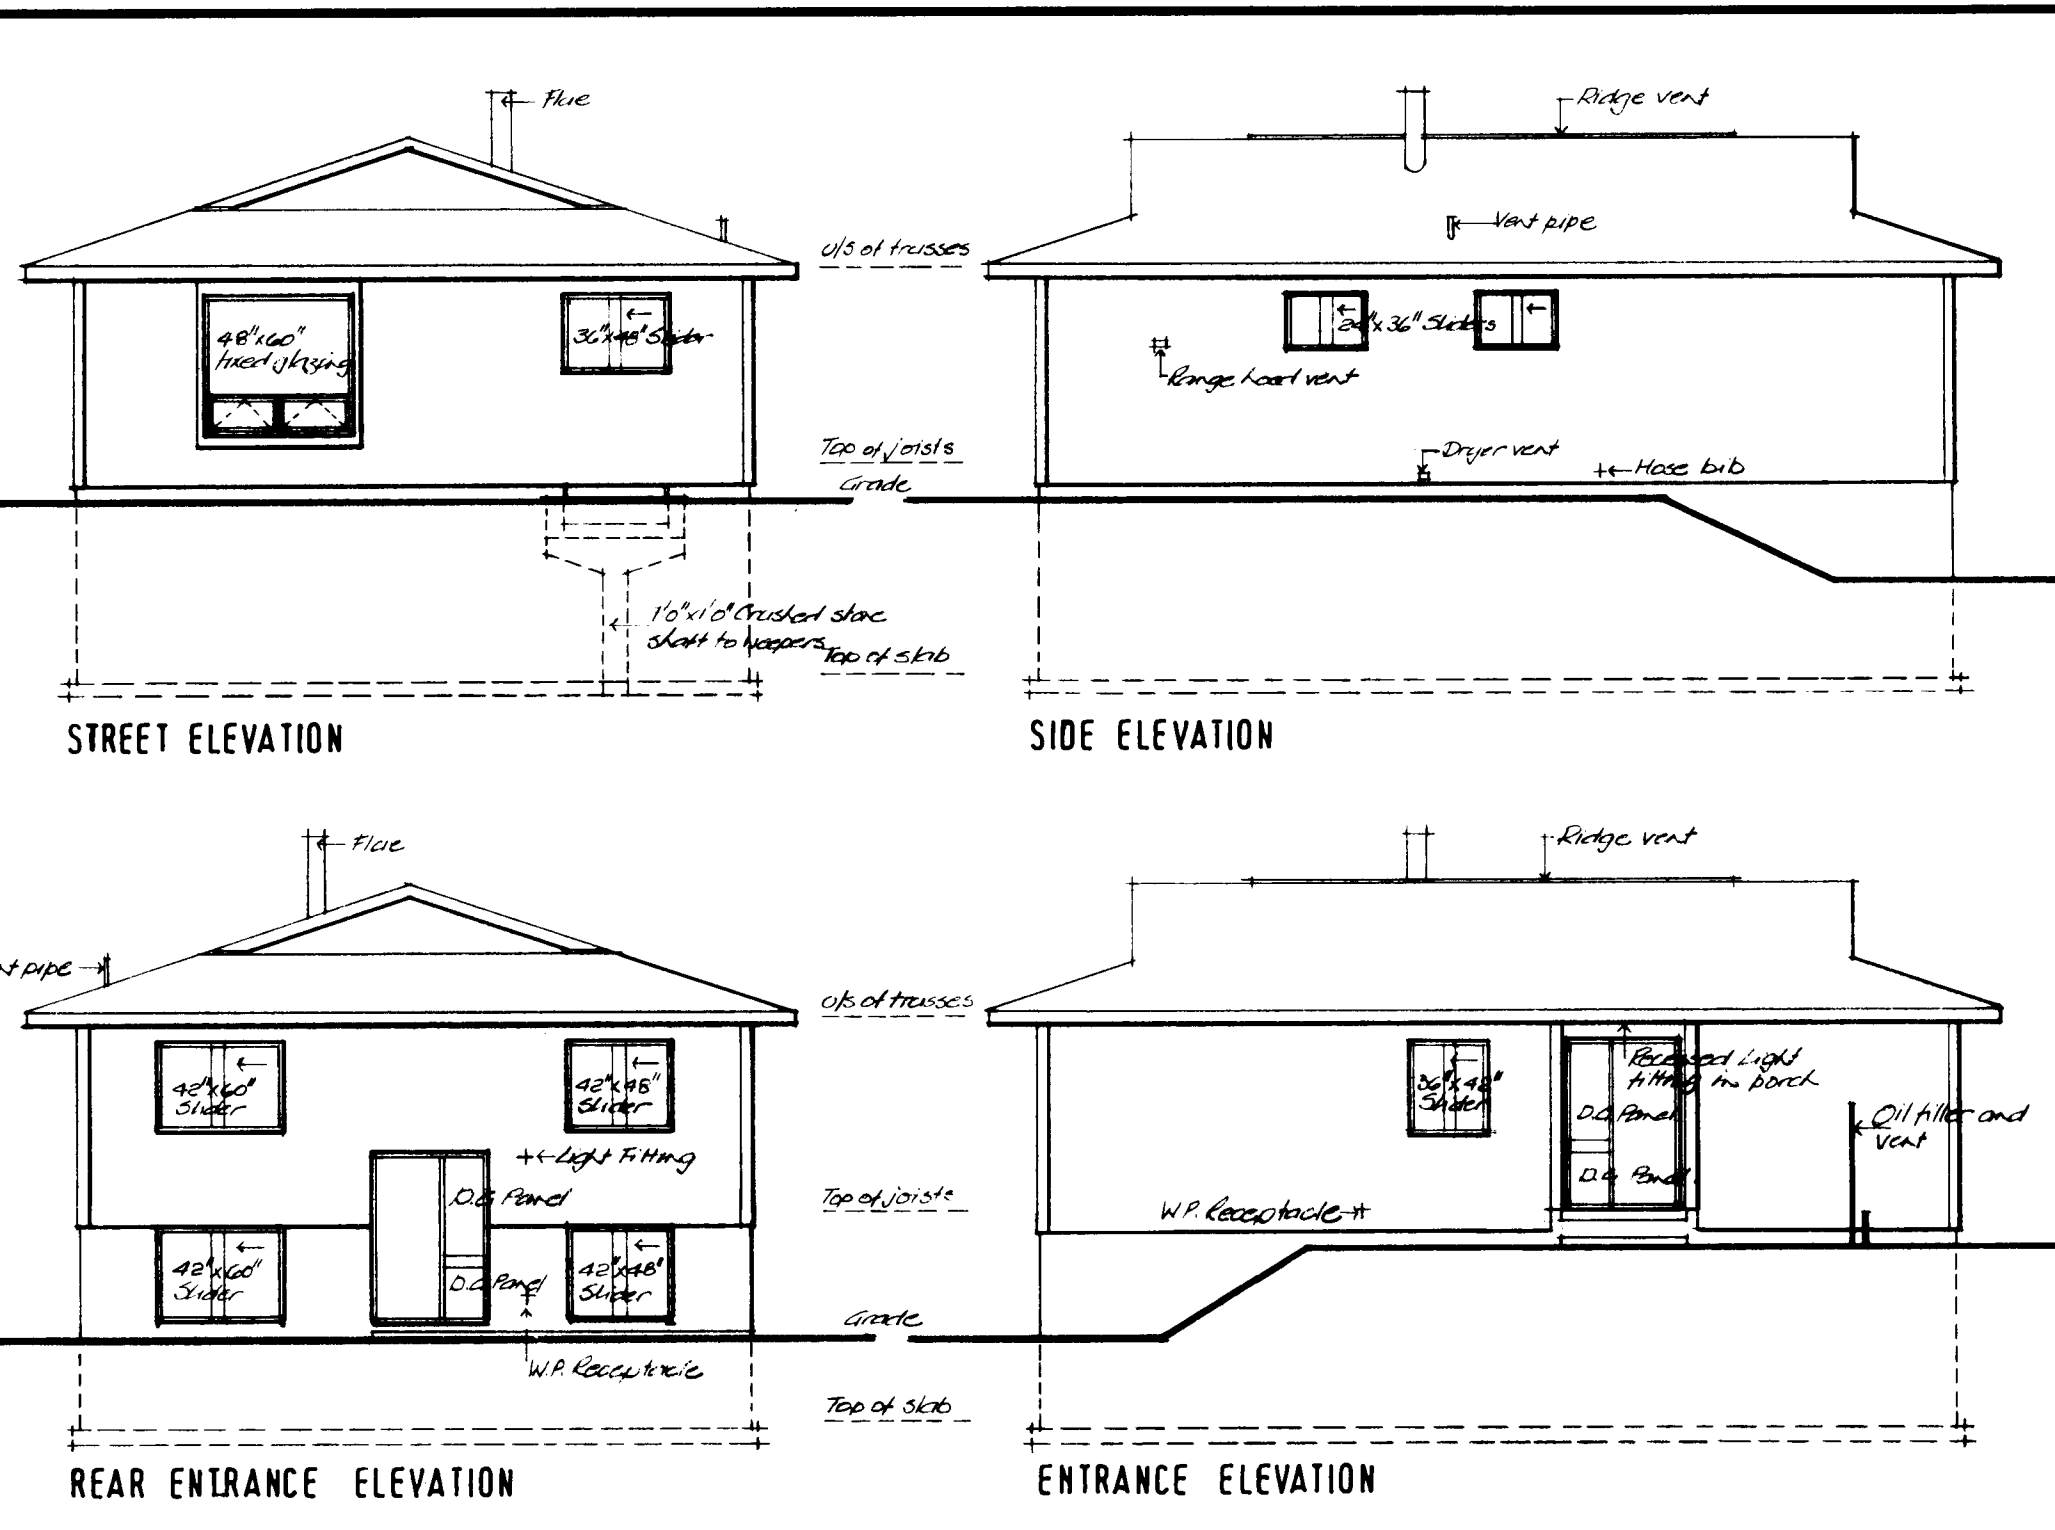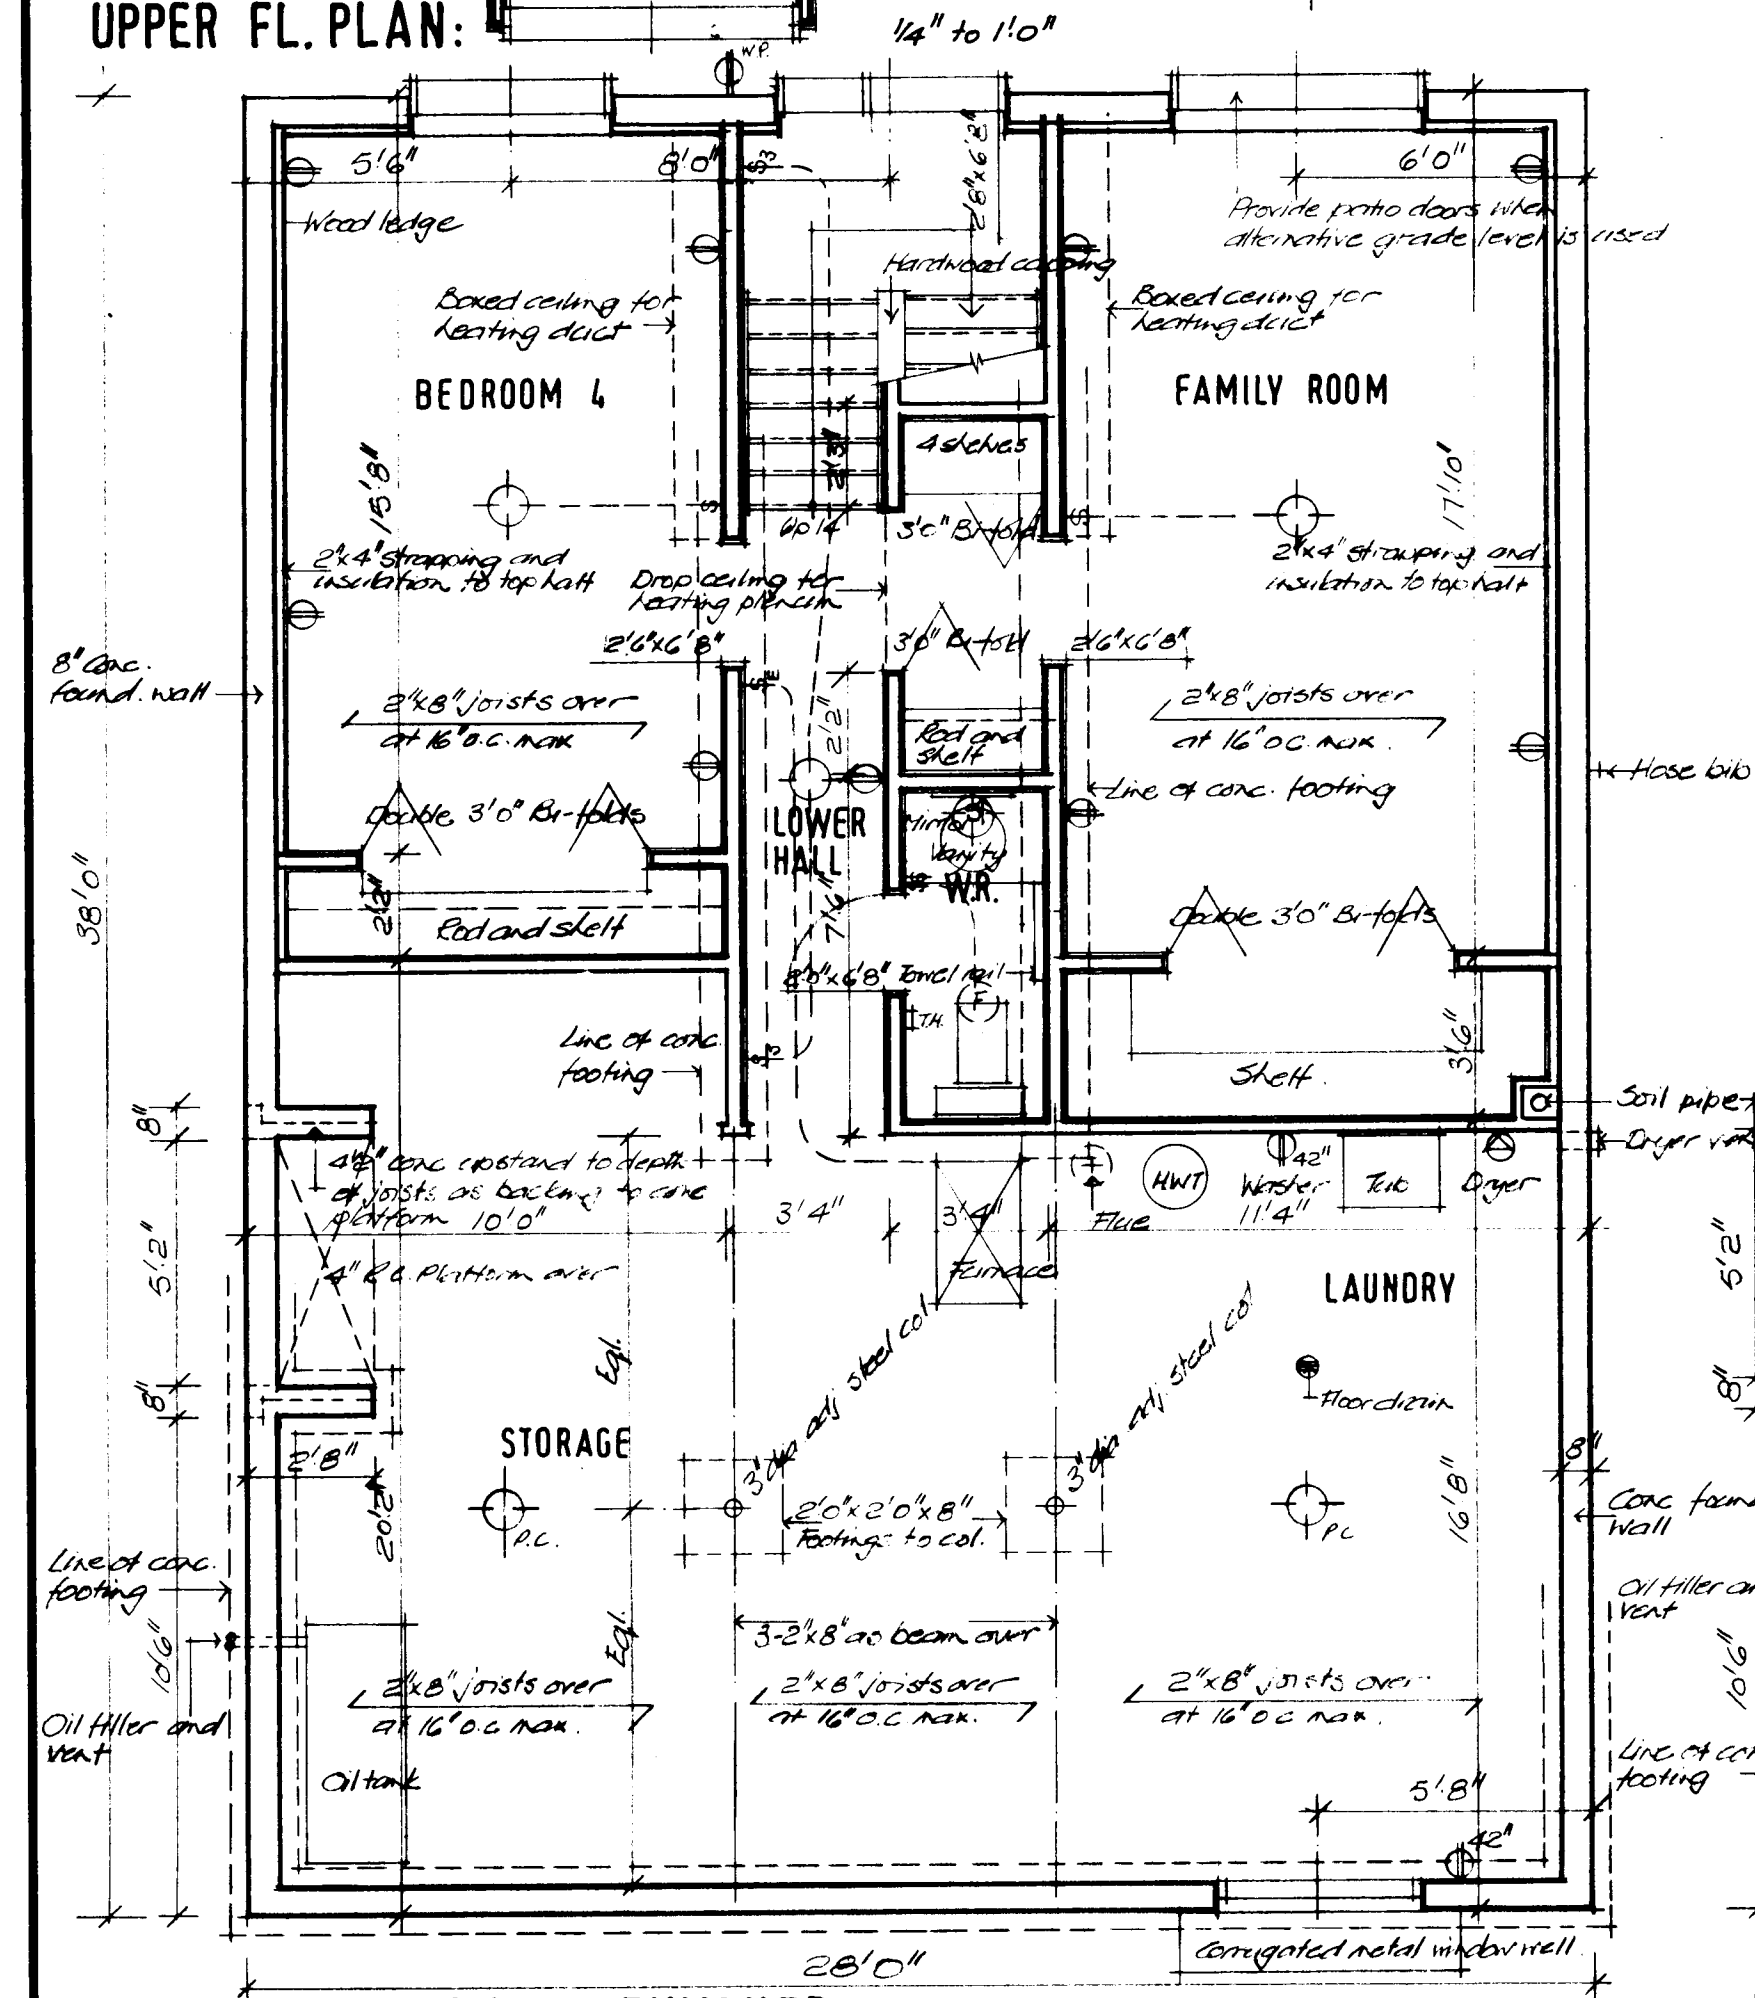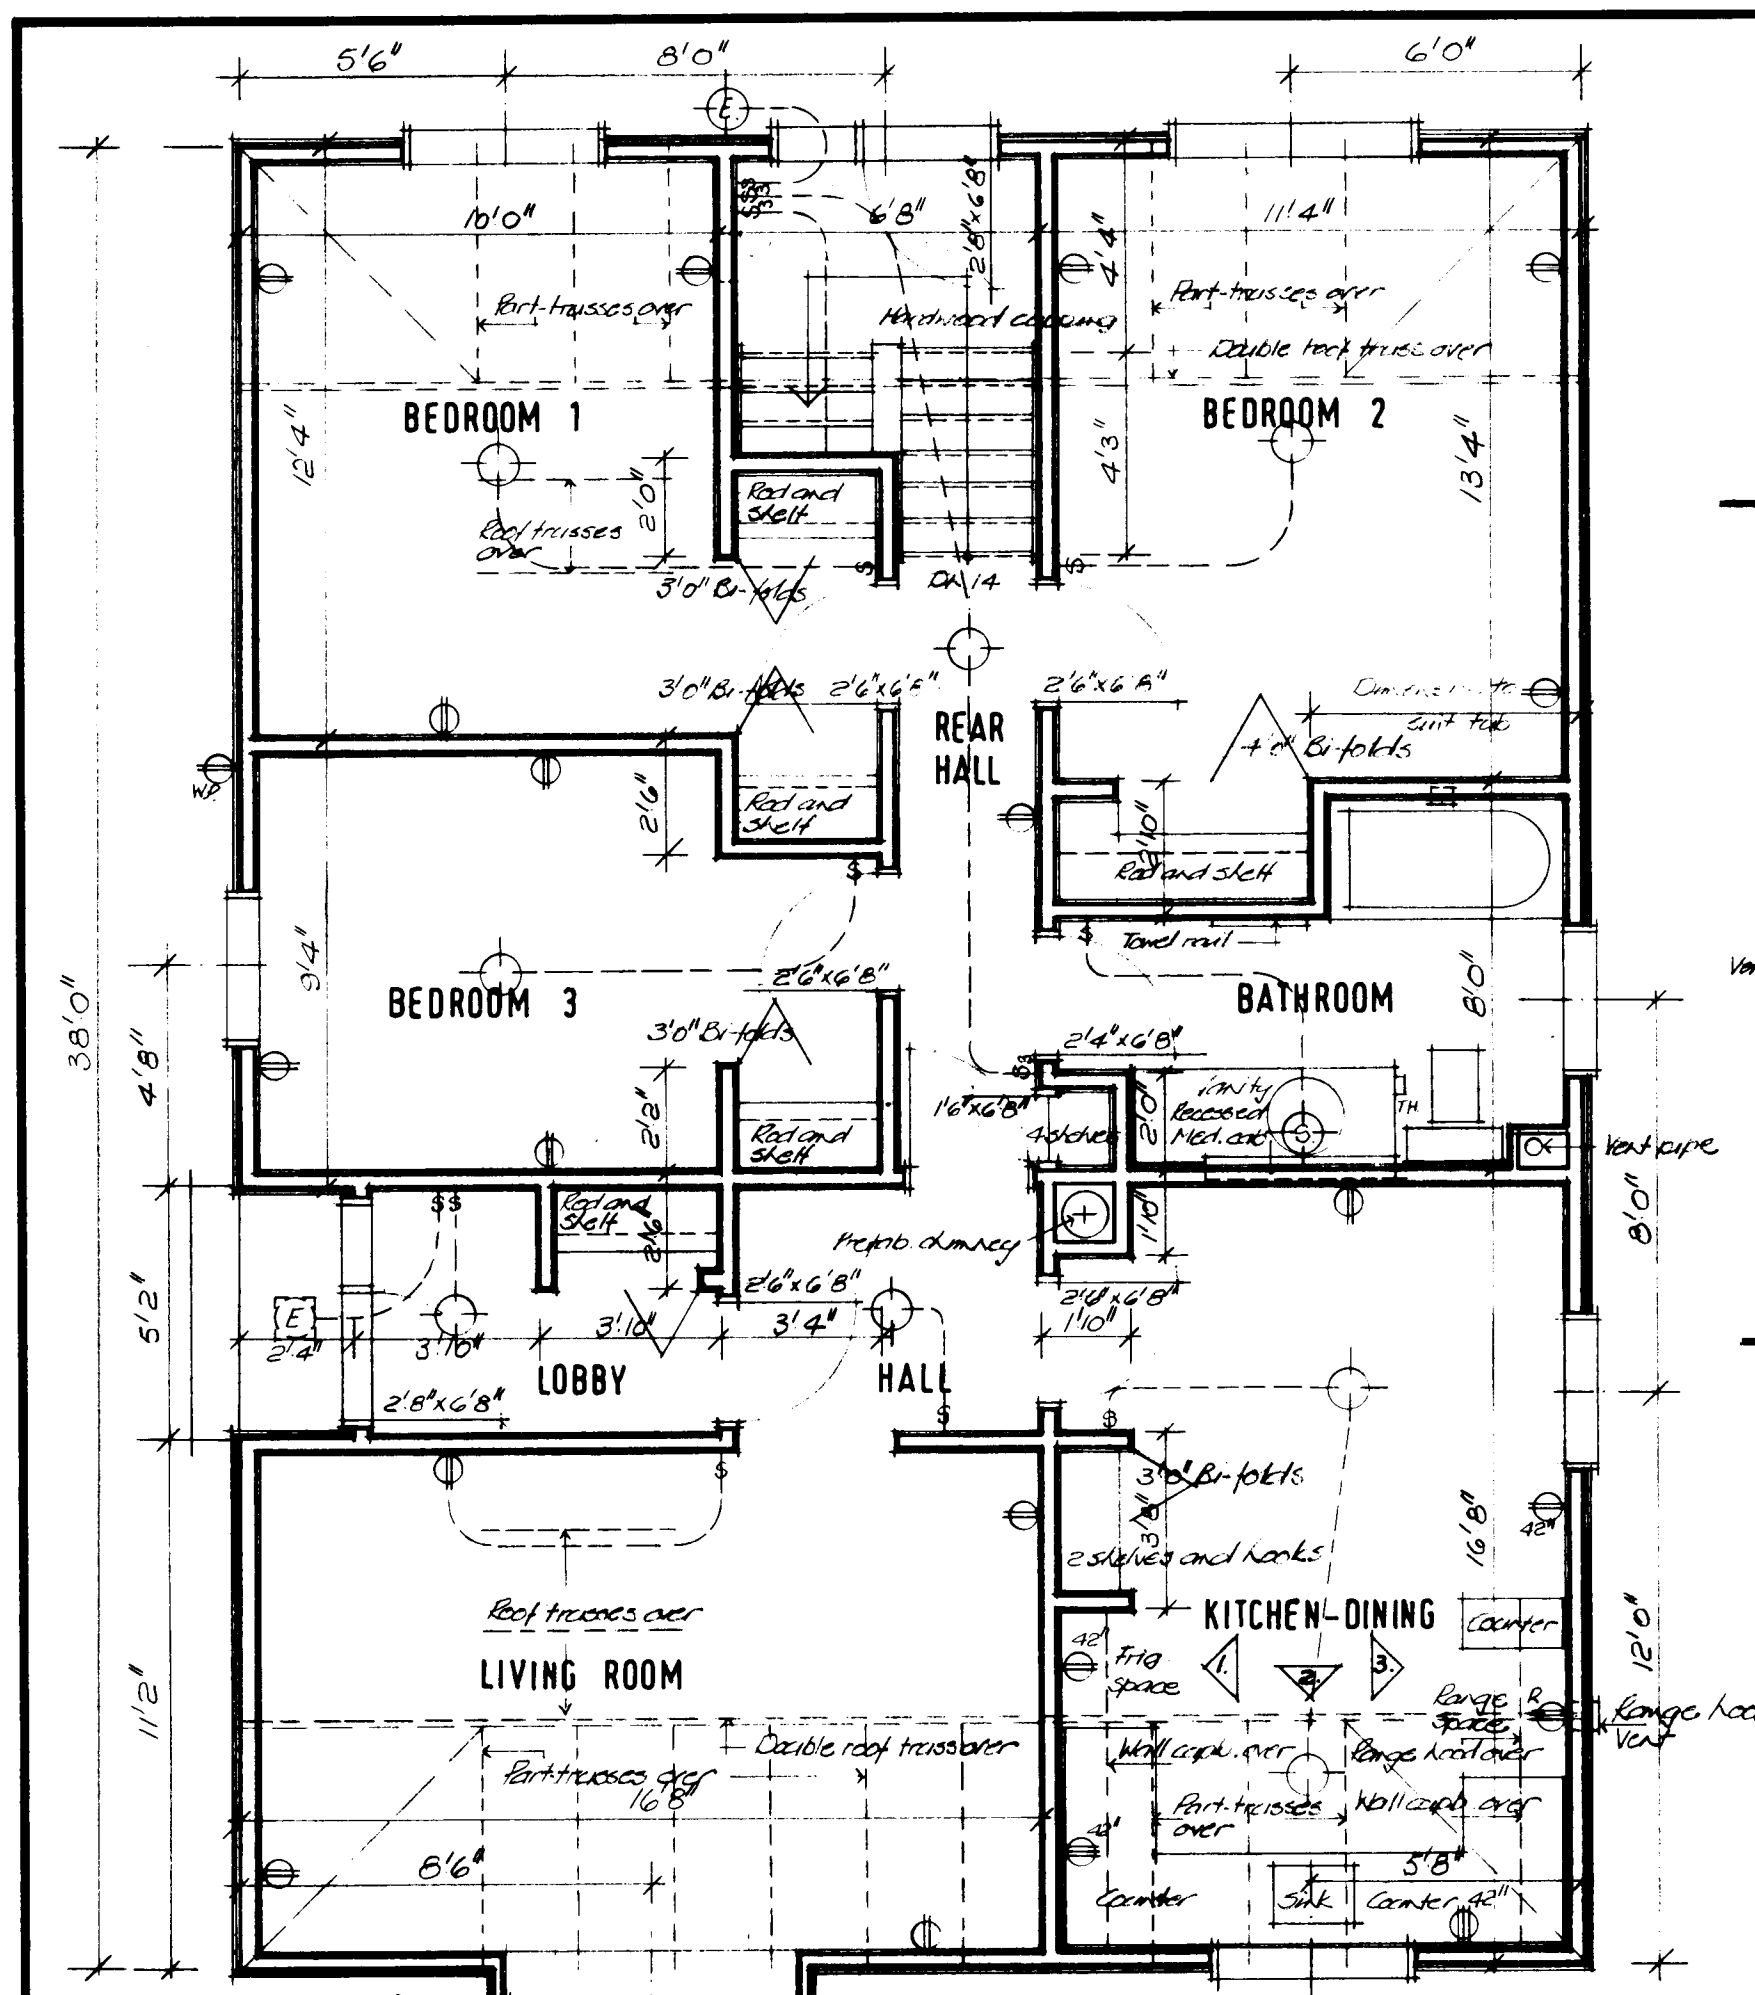

GENERAL NOTES

- ALL FOOTINGS AND FOUNDATIONS SHALL BE TAKEN DOWN TO SOLID BEARING AND BELOW THE ACCEPTED LOCAL FROST PENETRATION LINE. FOOTINGS AND FOUNDATIONS MAY HAVE TO BE INCREASED TO SUIT EXISTING SOIL CONDITIONS.
- DOUBLED JOISTS REQUIRED UNDER PARTITIONS RUNNING PARALLEL TO THE FLOOR JOISTS MAY BE BLOCKED APART 8" AT 4'-0" O.C. TO PERMIT THE PASSAGE OF HEATING DUCTS ETC.
- FOR ORDINARY LOADING CONDITIONS, WOOD LINTELS OVER DOORS, WINDOWS ETC. IN EXTERIOR AND INTERIOR WALLS SHALL BE PLACED ON EDGE.
- THE POSITION AND NUMBER OF ELECTRICAL OUTLETS MAY BE RE-LOCATED BUT MUST IN ALL CASES MEET THE MINIMUM REQUIREMENTS OF THE HOUSING STANDARDS AND COMPLY WITH LOCAL CODES.
- PROVIDE A SHELF AND ROD IN THE COAT AND CLOTHES CLOSETS.
- ADDITIONAL INSULATING MATERIAL MAY BE NECESSARY IN CERTAIN LOCALITIES TO PROVIDE THE REQUIRED RESISTANCE TO HEAT FLOW FOR SUCH AREA.
- THE STRUCTURAL MEMBERS ARE DESIGNED FOR A LIVE ROOF LOAD OF 1.5 PER SQUARE FOOT. IN AREAS WHERE A ROOF LOAD IN EXCESS OF THE DESIGN LOAD IS EXPECTED, IT WILL BE NECESSARY TO REDESIGN THE STRUCTURAL MEMBERS ACCORDINGLY.
 - ALL STRUCTURAL MEMBERS WILL BE CONSTRUCTION GRADE AND SPECIES UNLESS OTHERWISE NOTED ON THE DRAWINGS.
 - All construction must comply with the Canadian Code for Residential Construction and any applicable local codes.
 - This drawing is intended as a Guide only. The final choice and use of methods and details of construction and materials is the responsibility of the user.

DATE	NHA	STDS	CHKD BY	DATE	REVISIONS	BY

ARCHITECT

C.M.H.C.





DATE

DESIGN NO

SHEET NO







H-2 1 of 1

CENTRAL MORTGAGE AND HOUSING CORPORATION

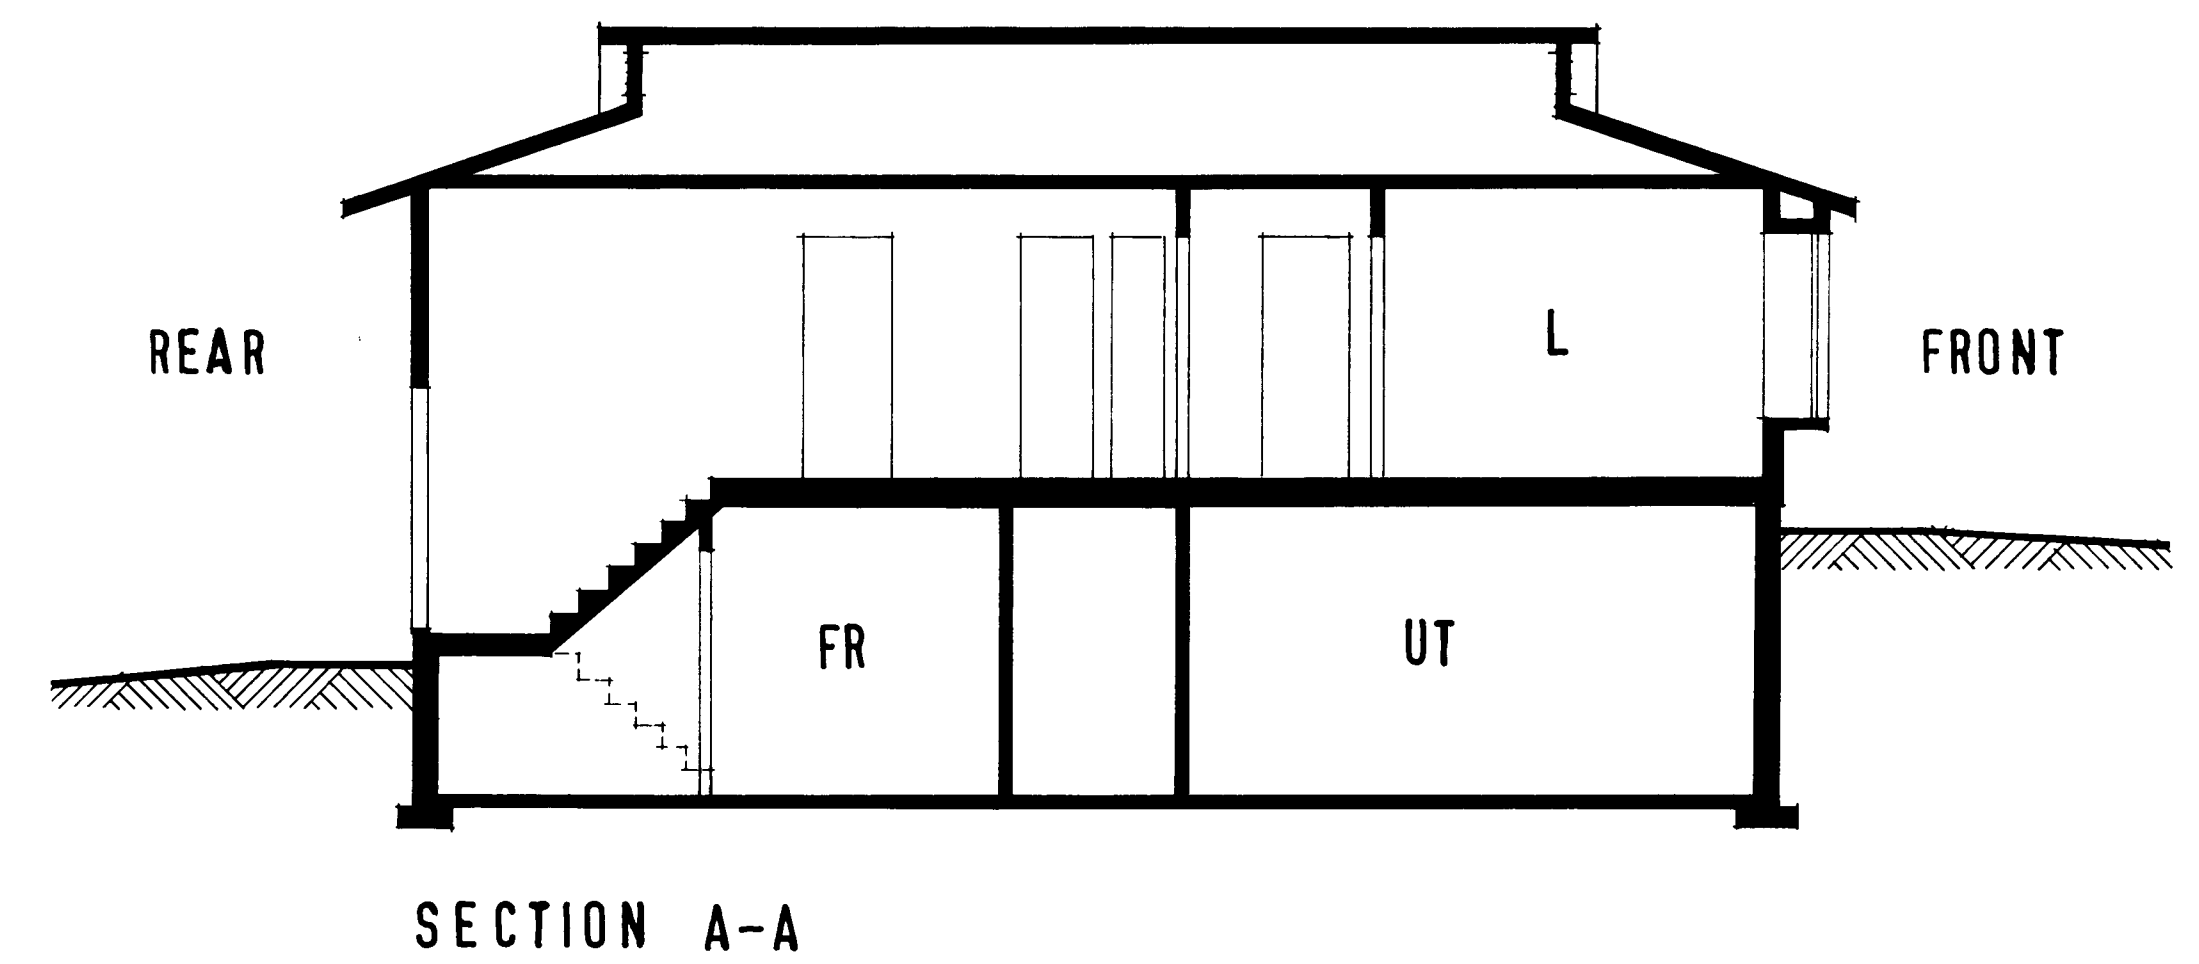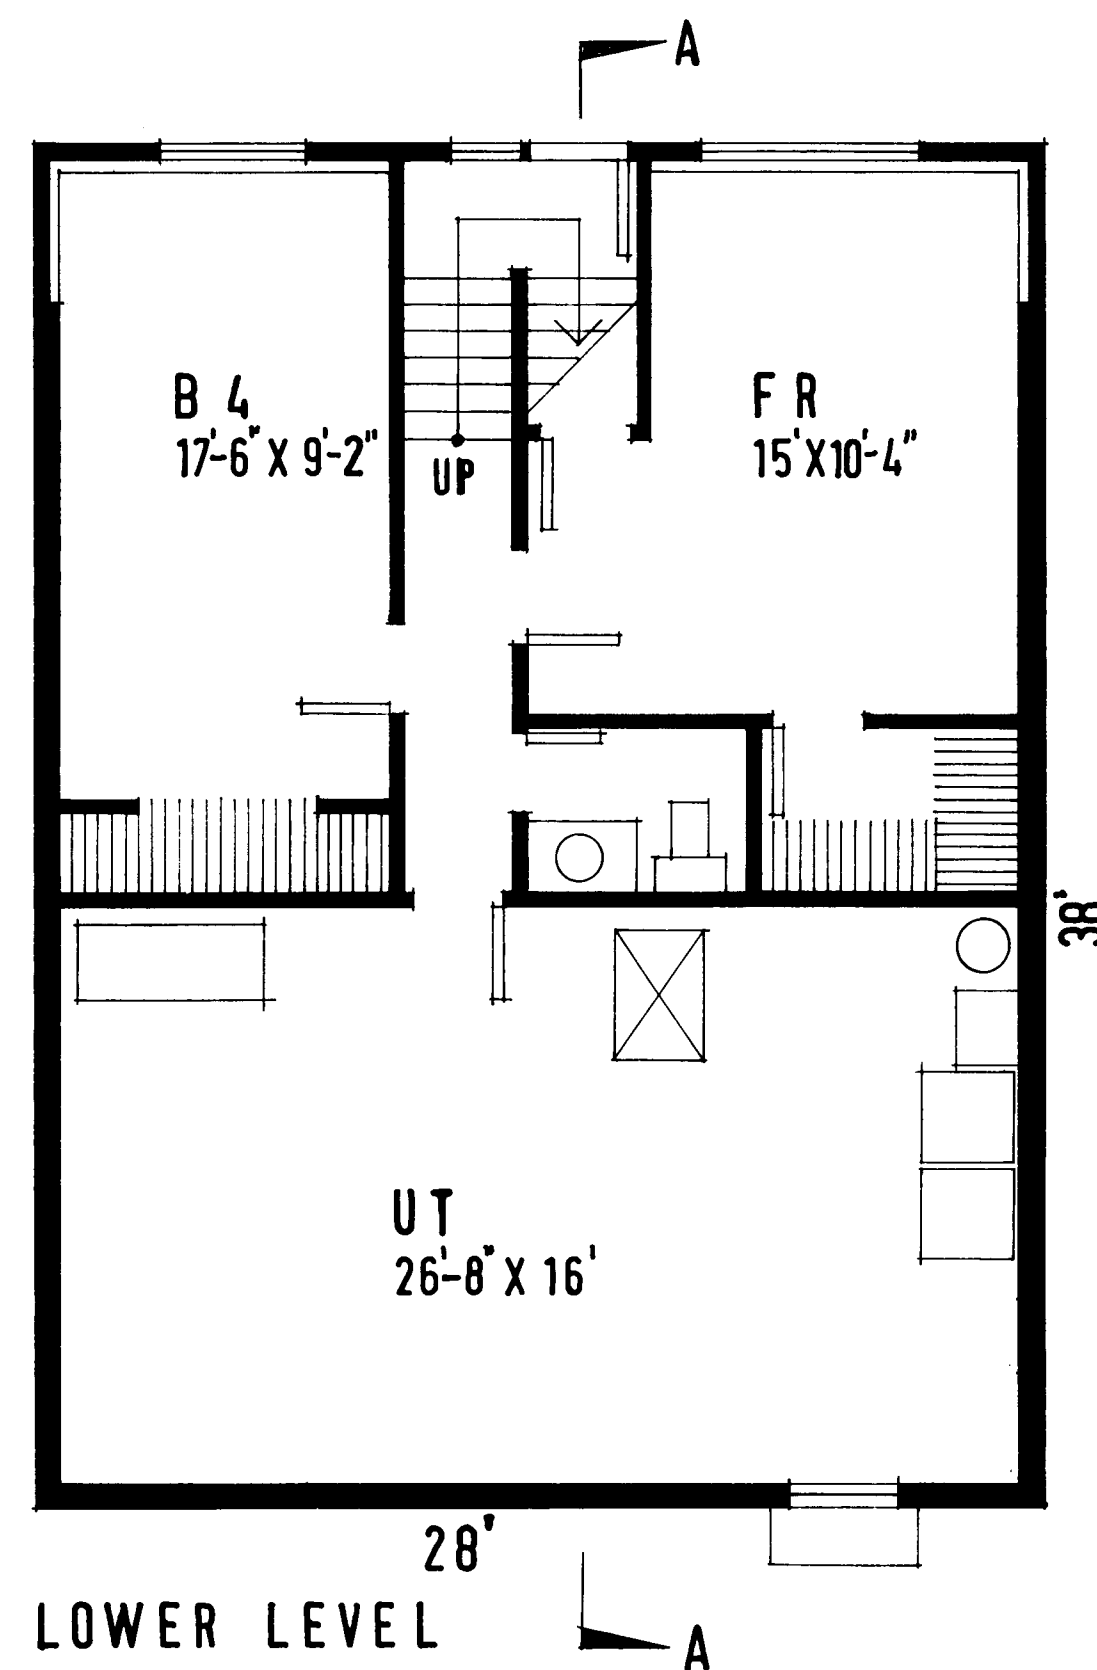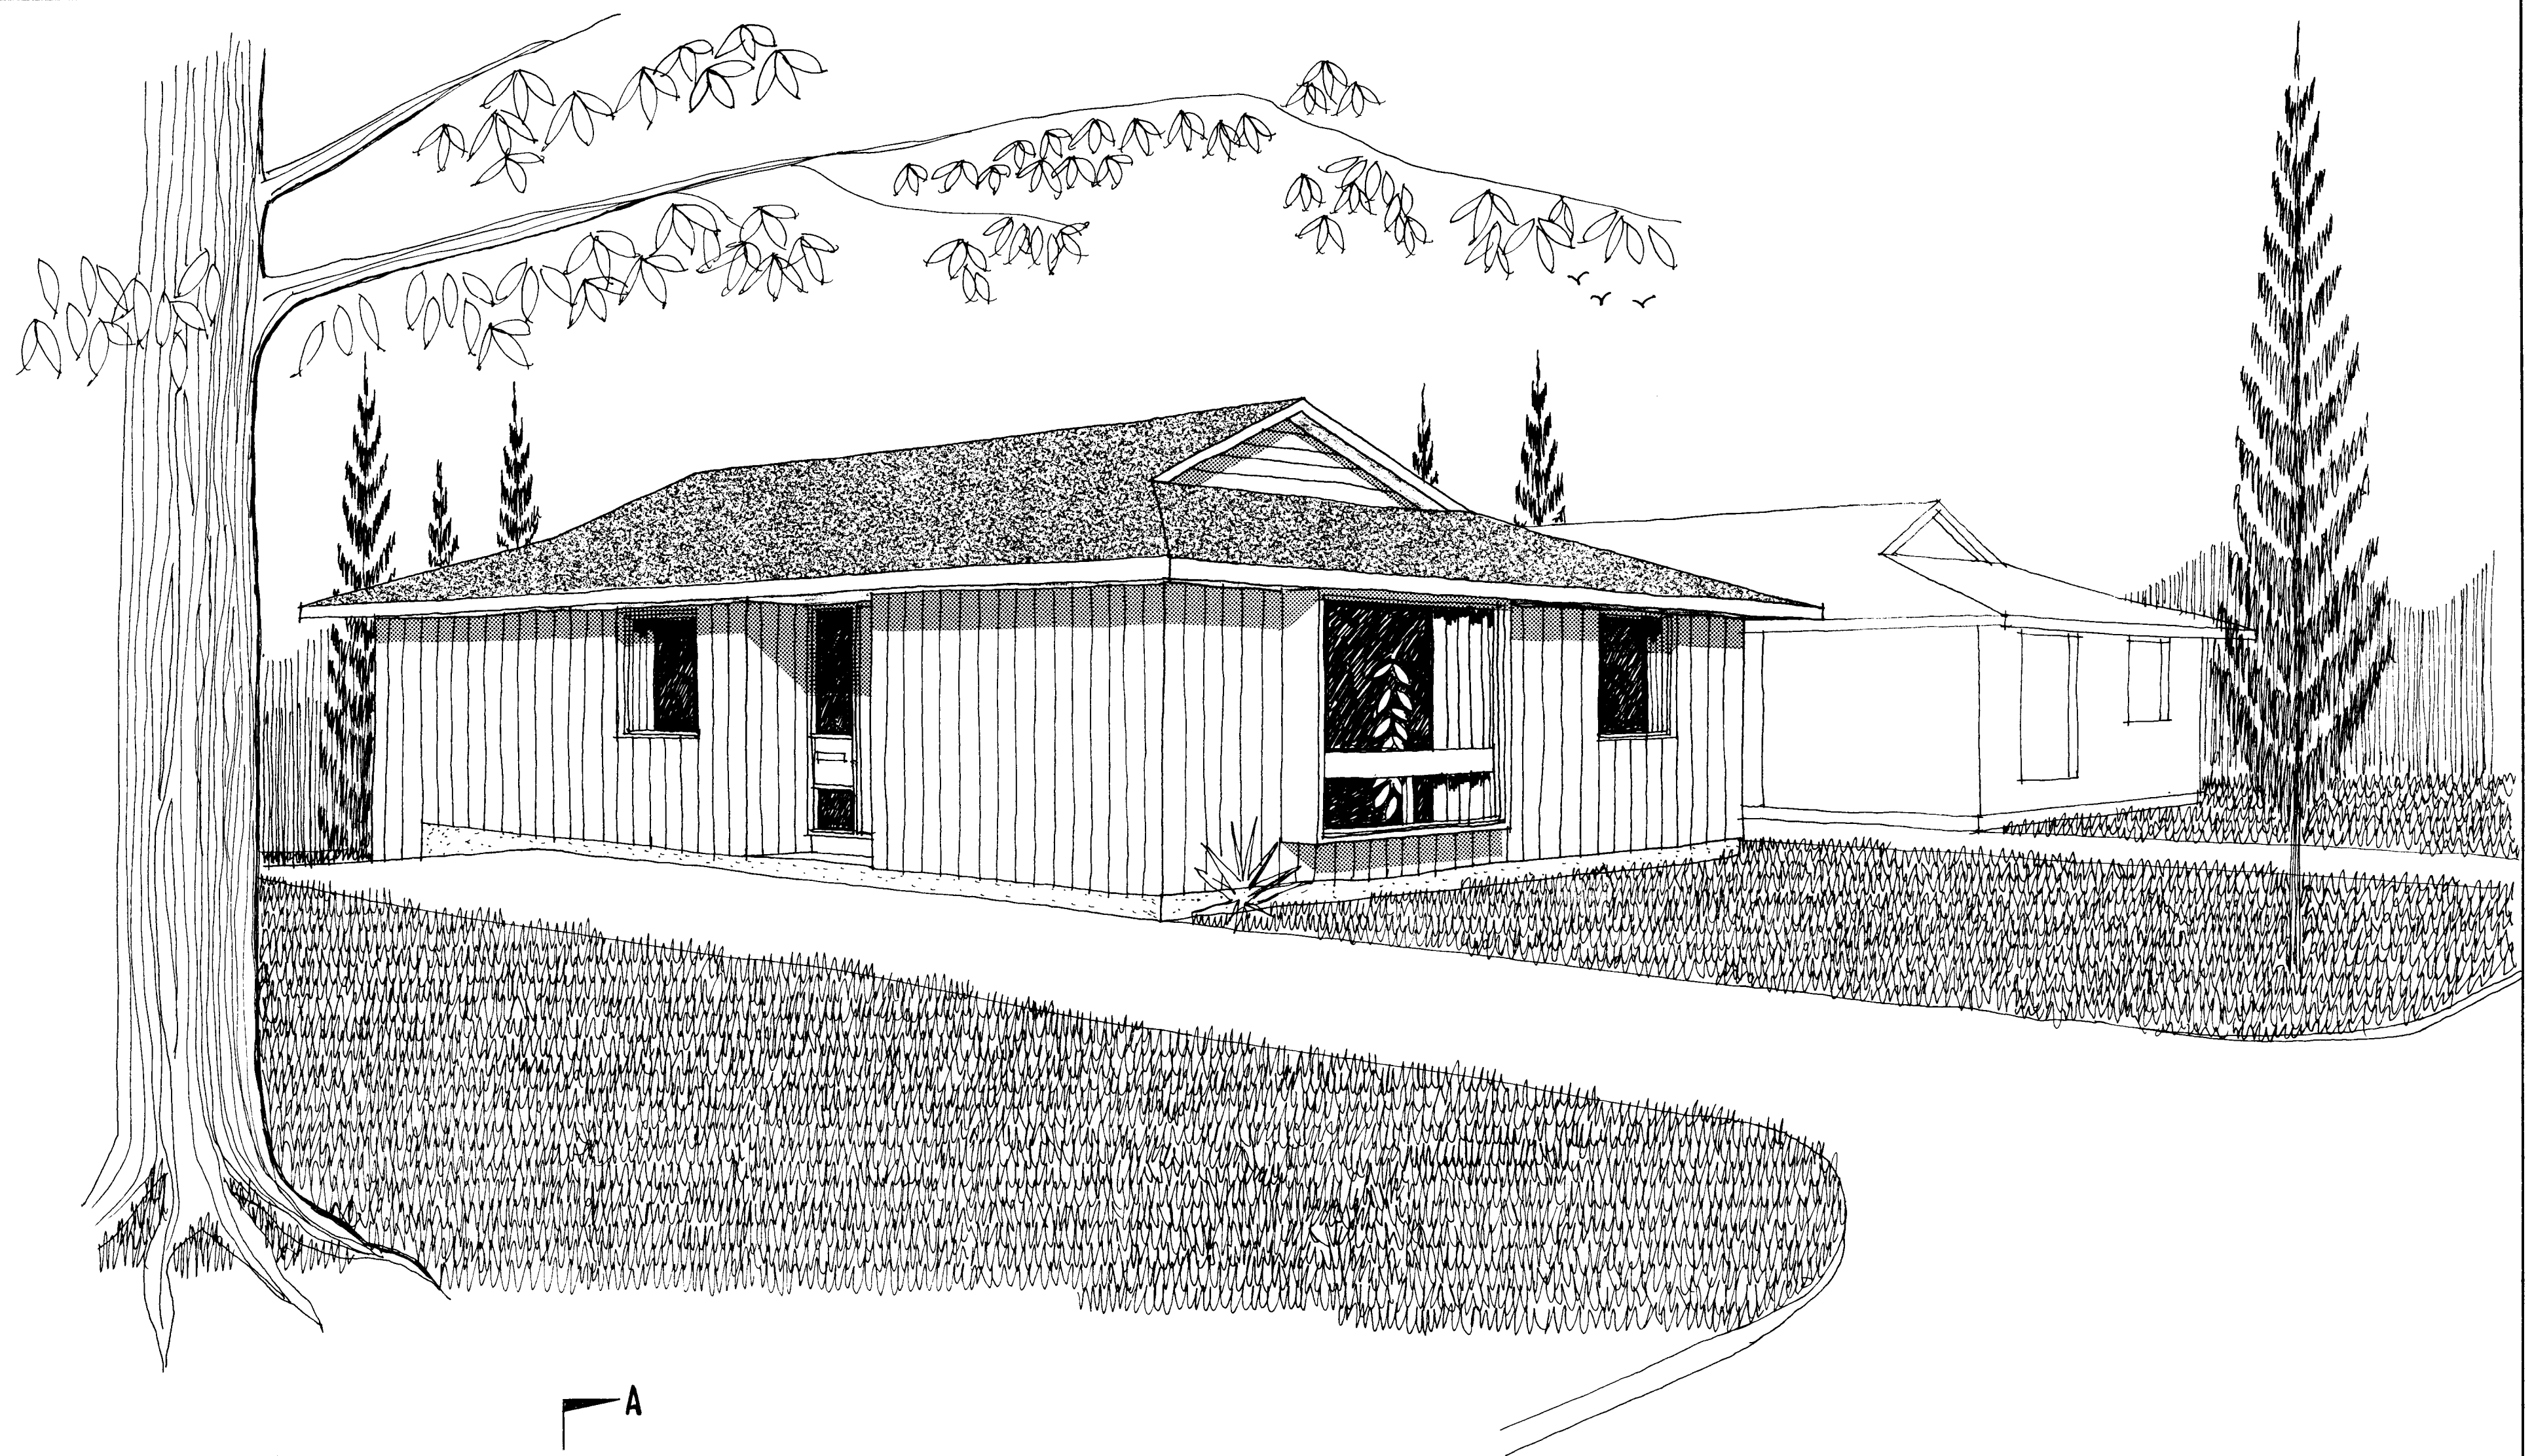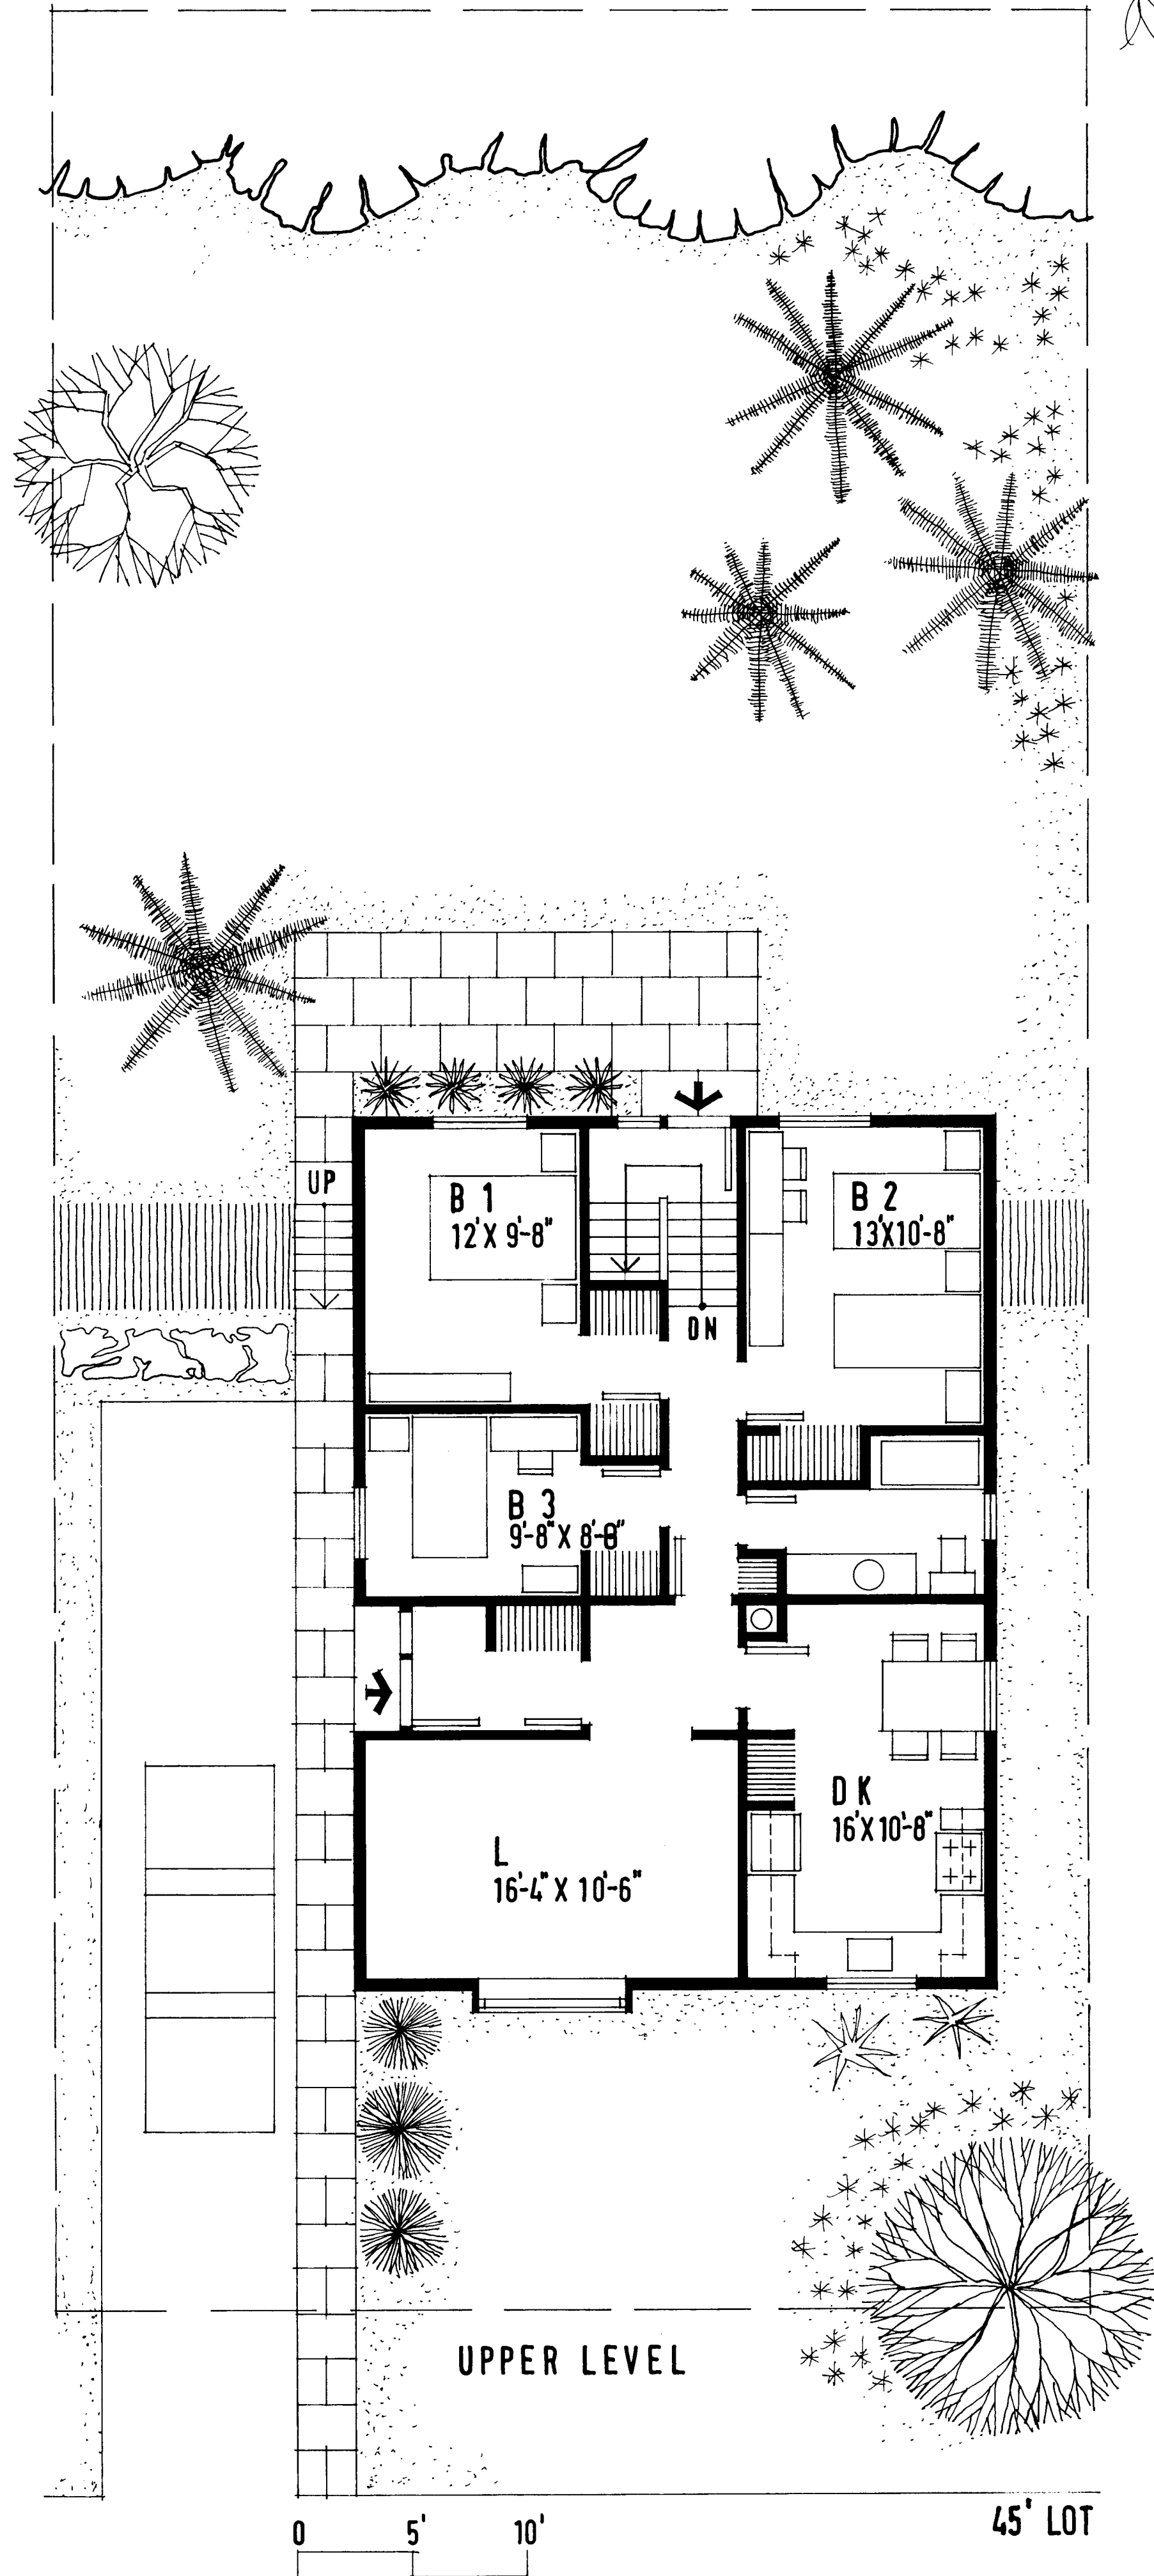


Bungalow
CMHC







H-2

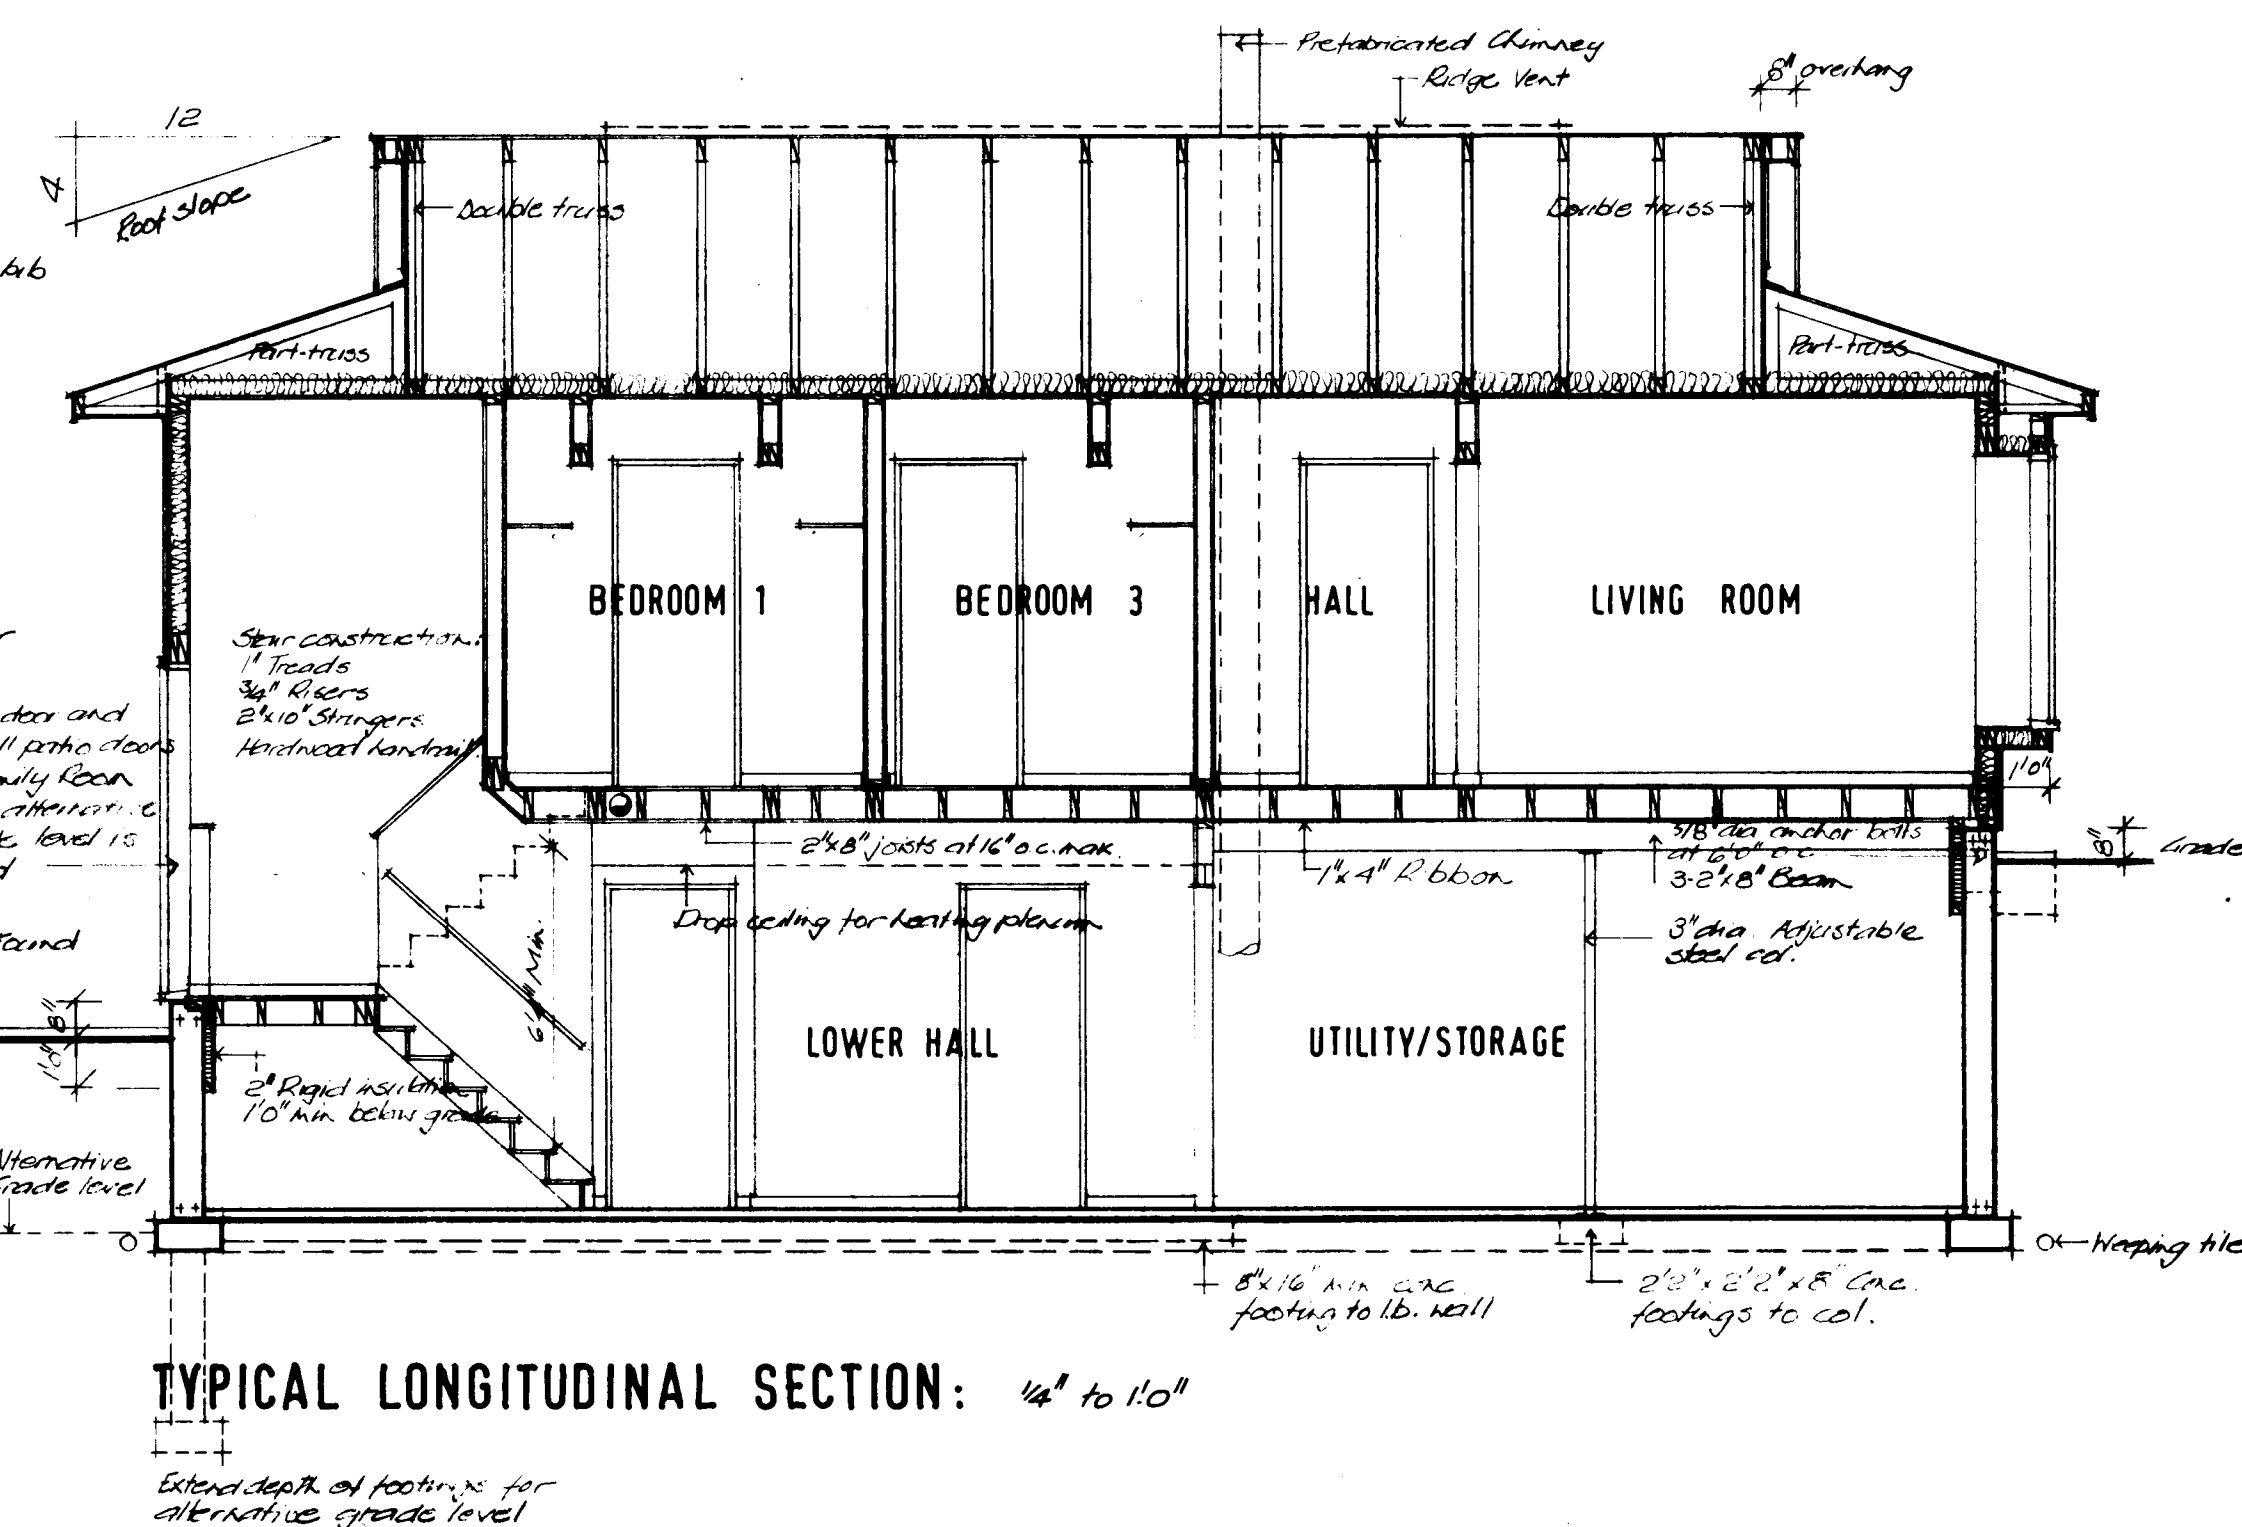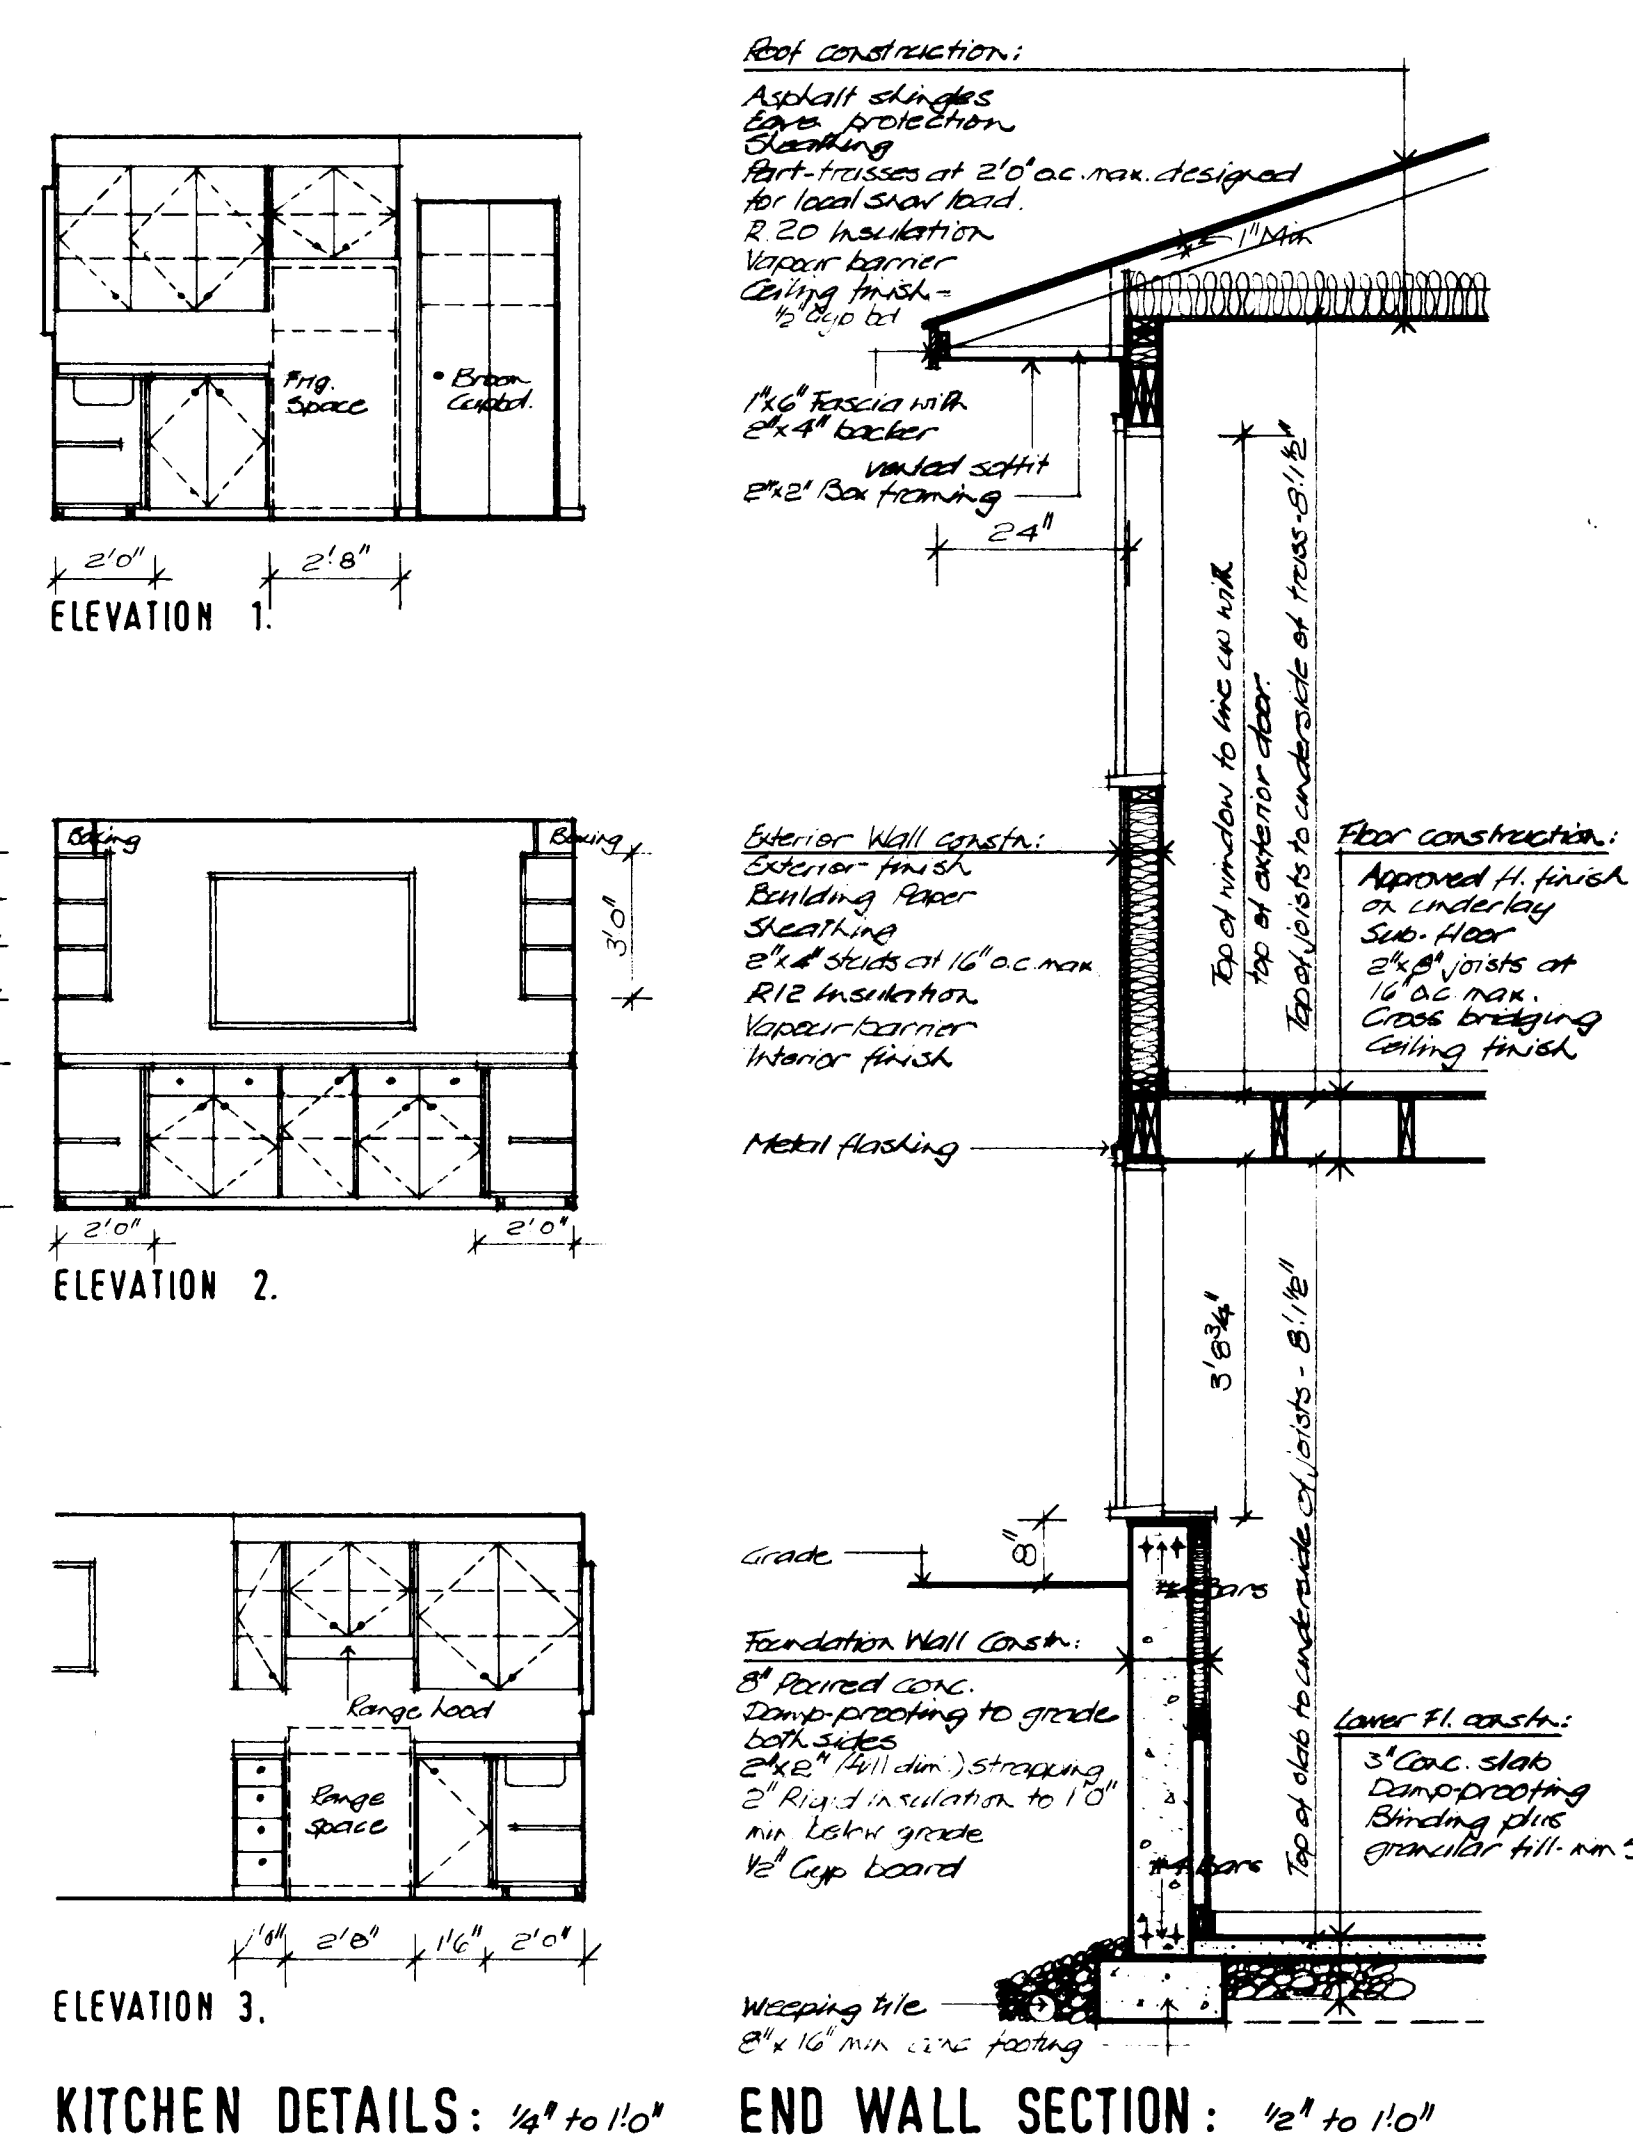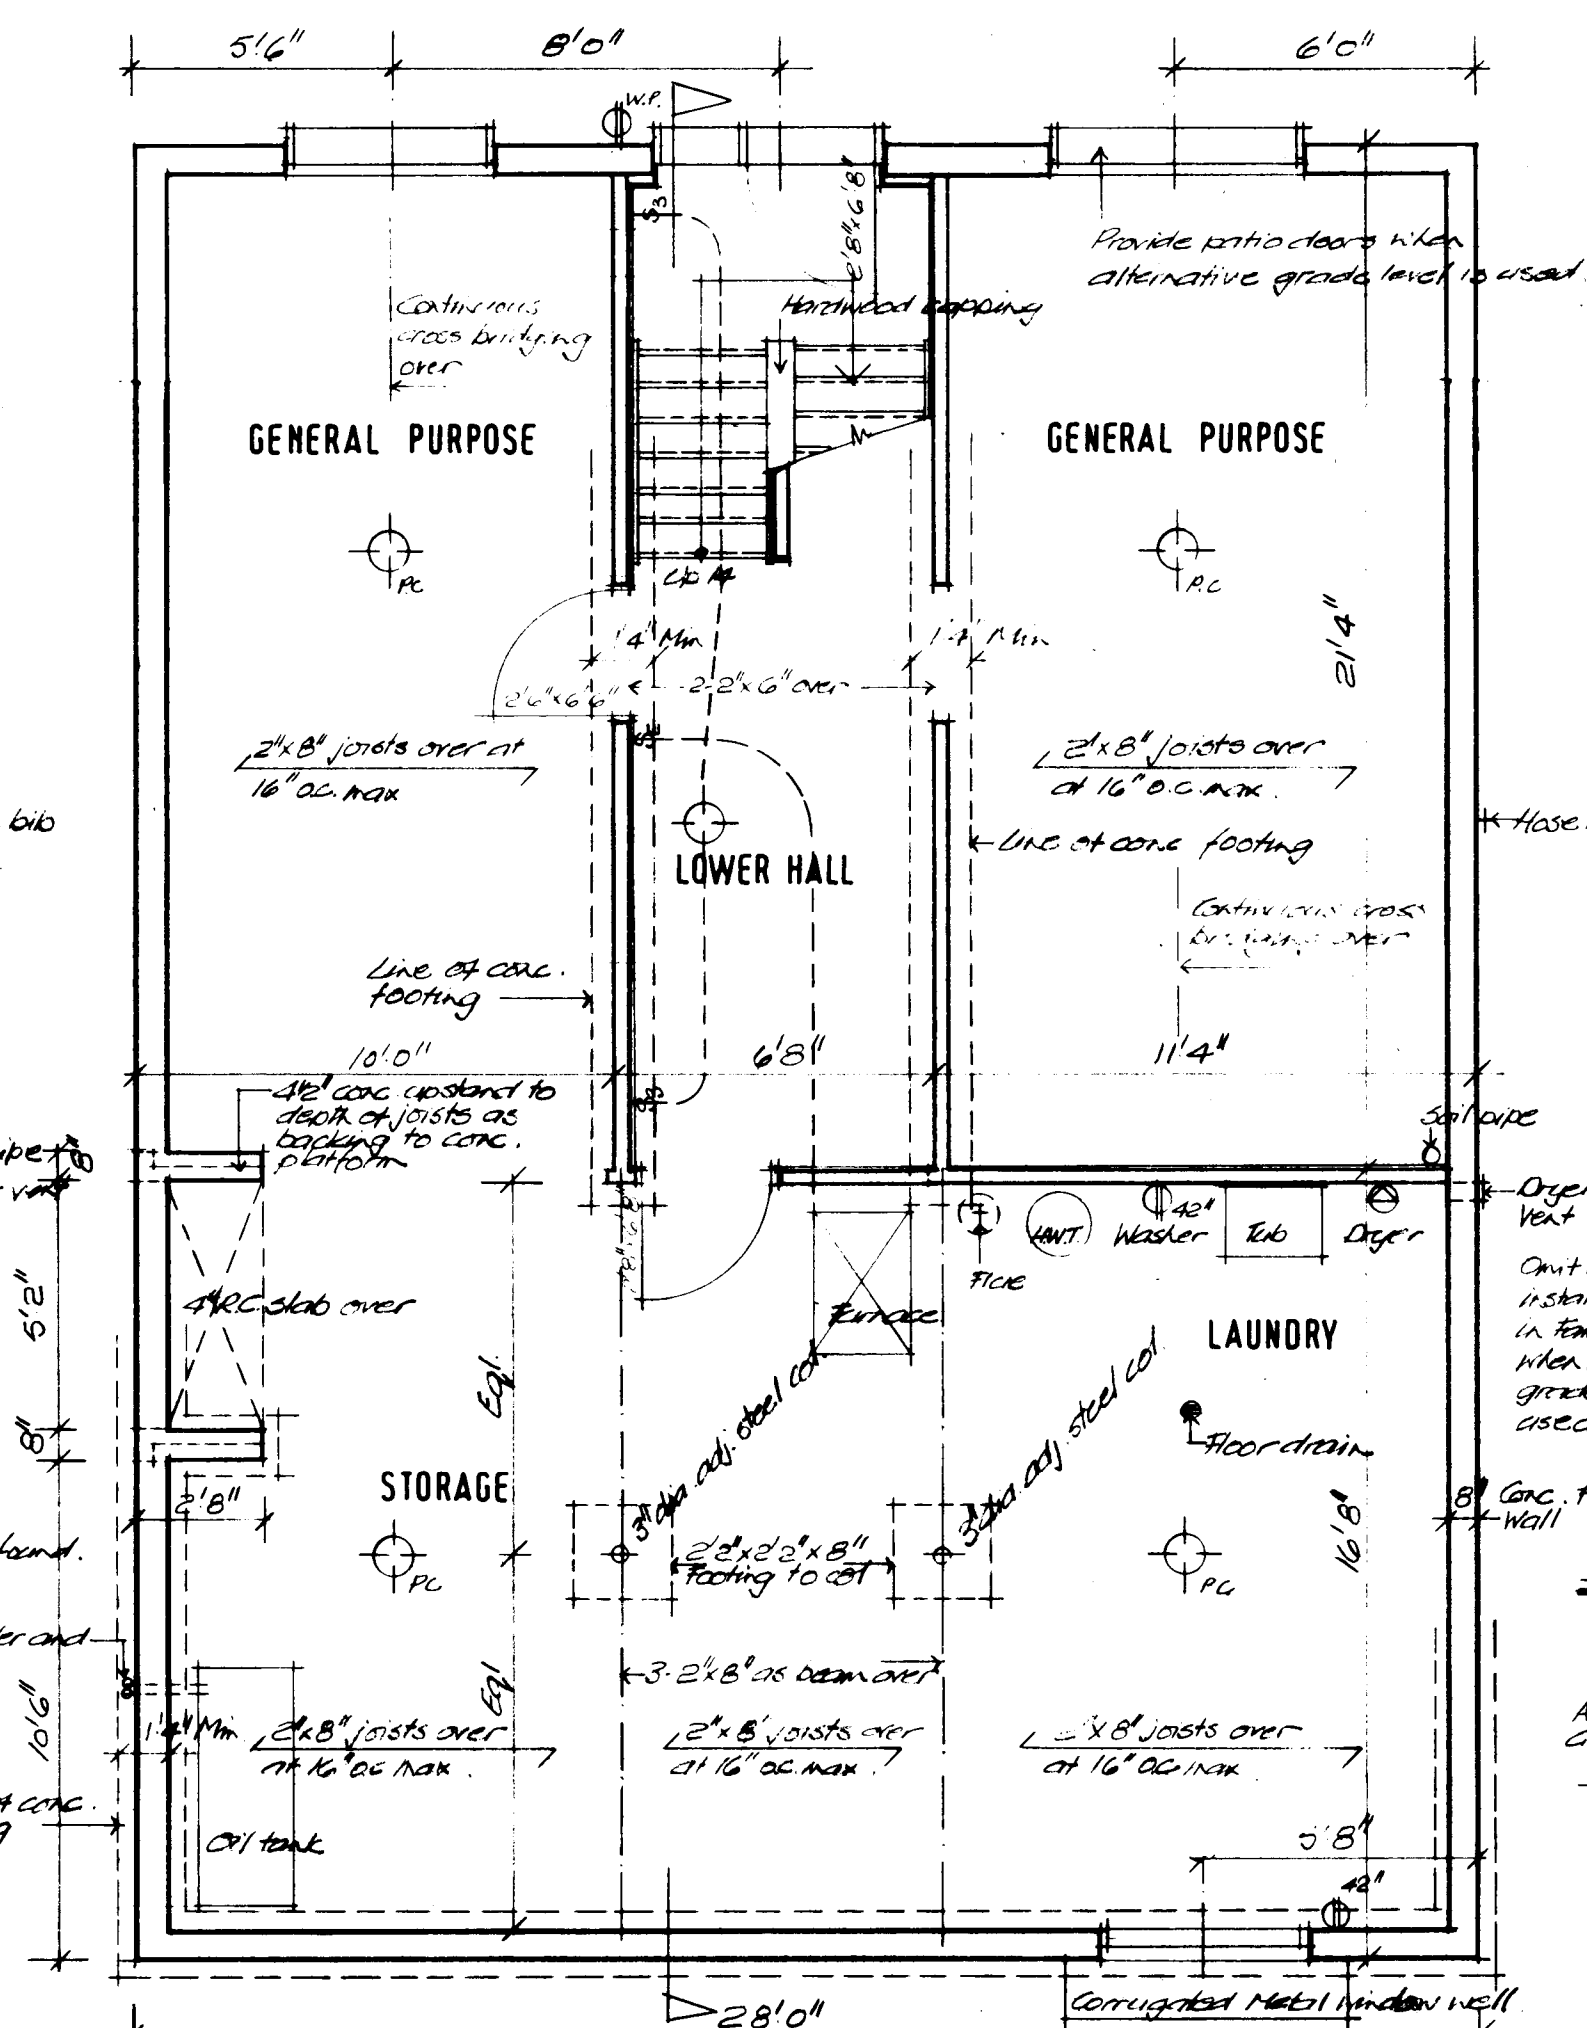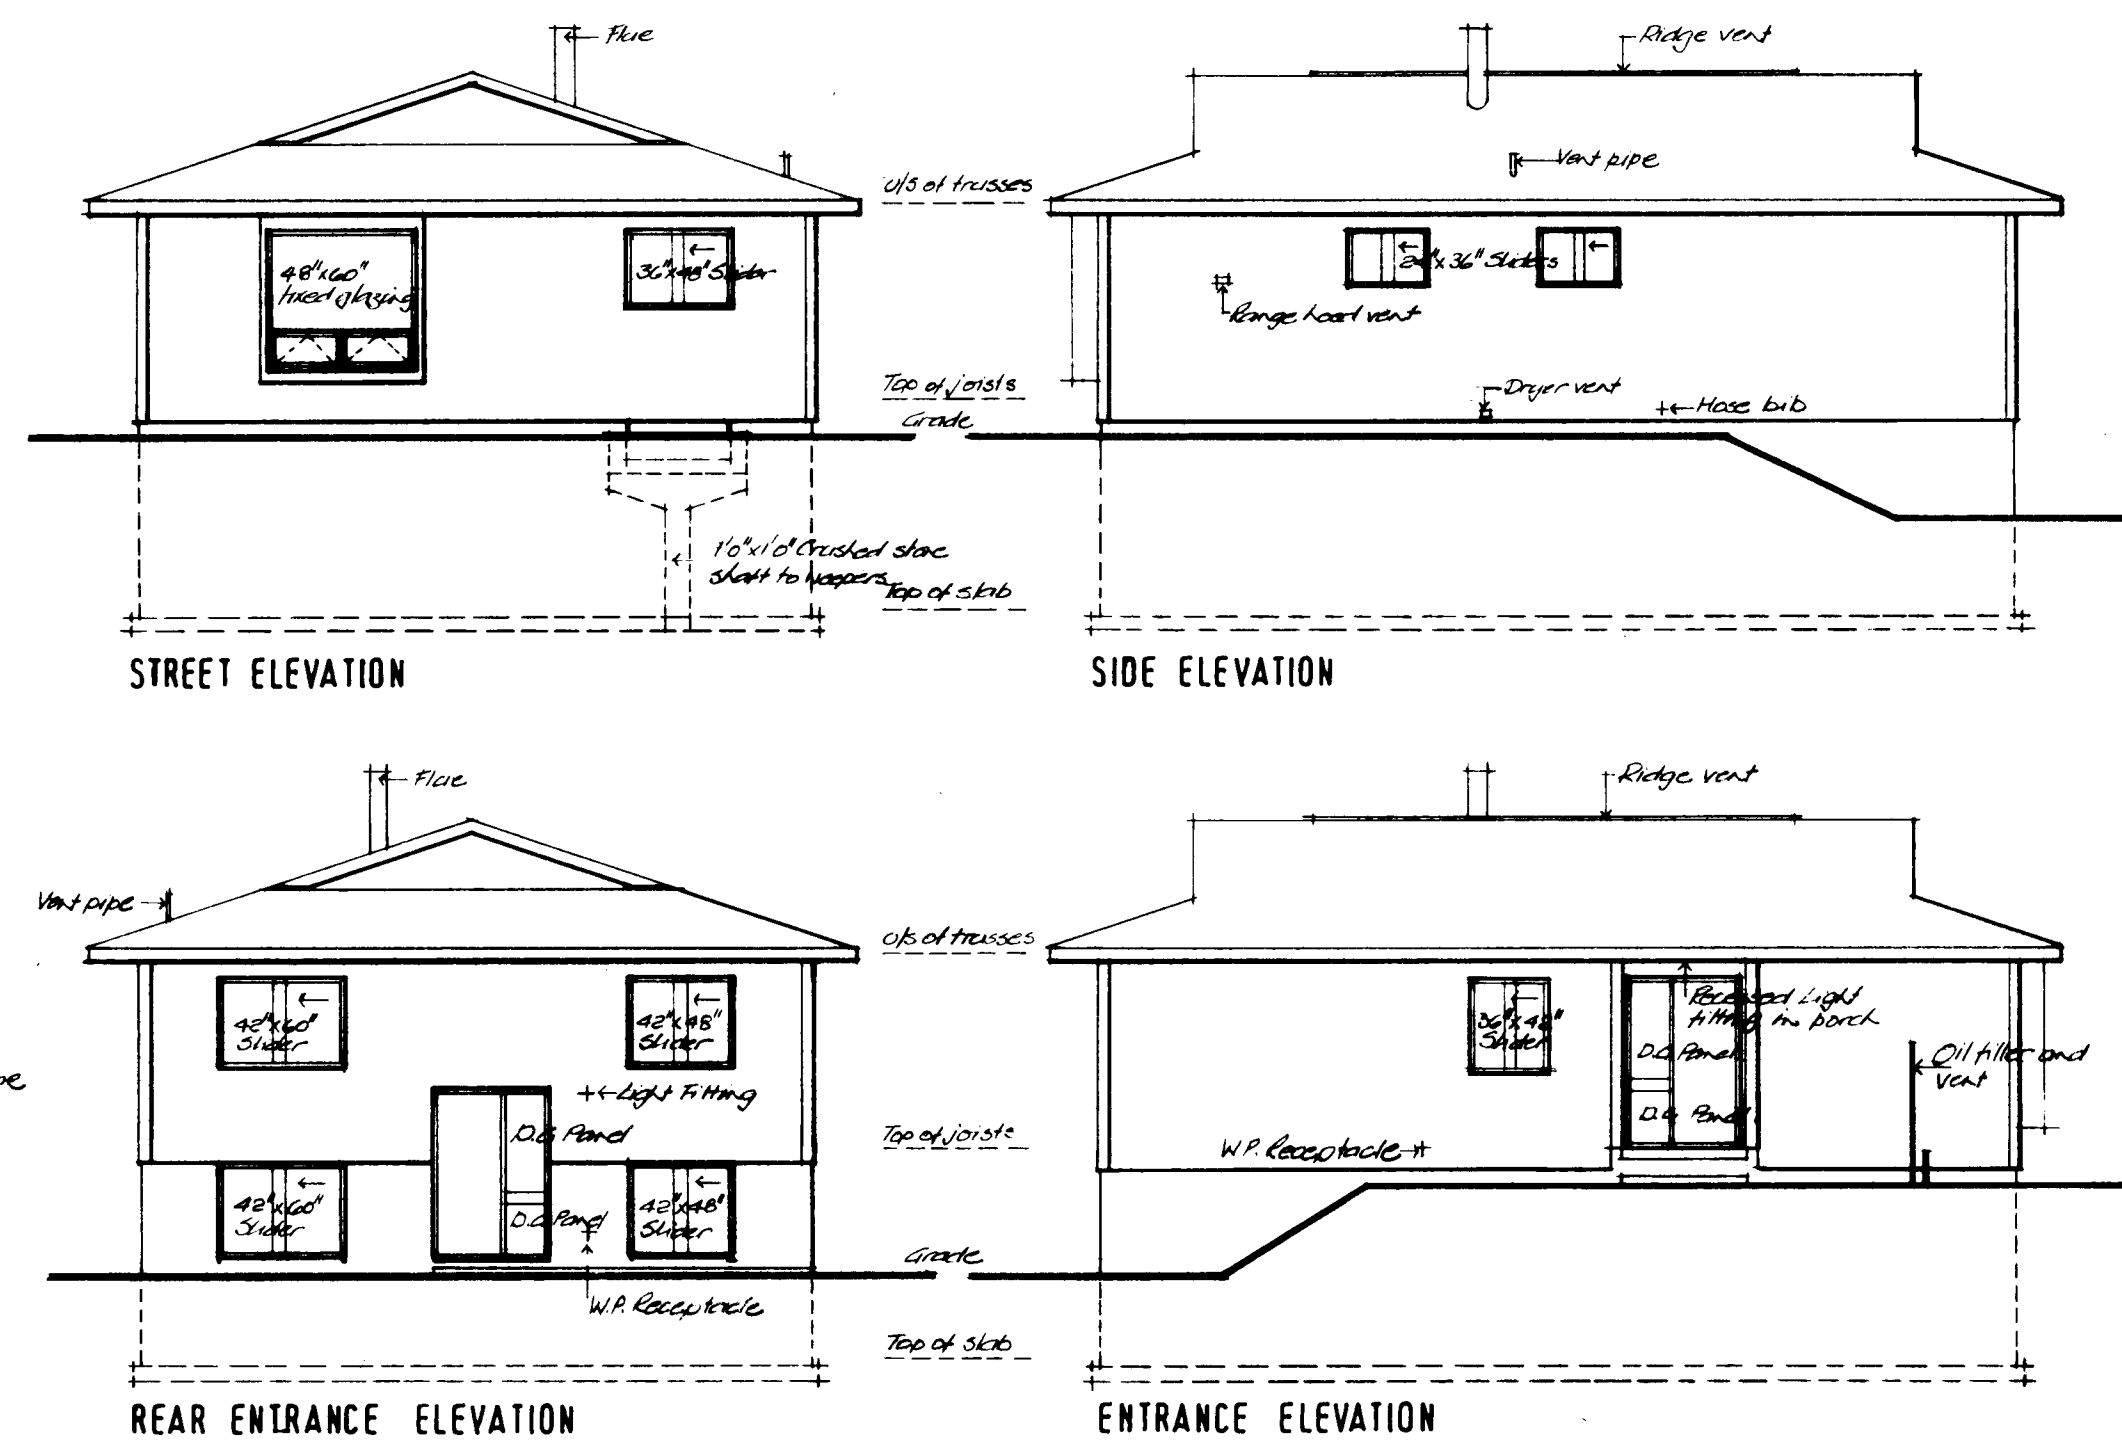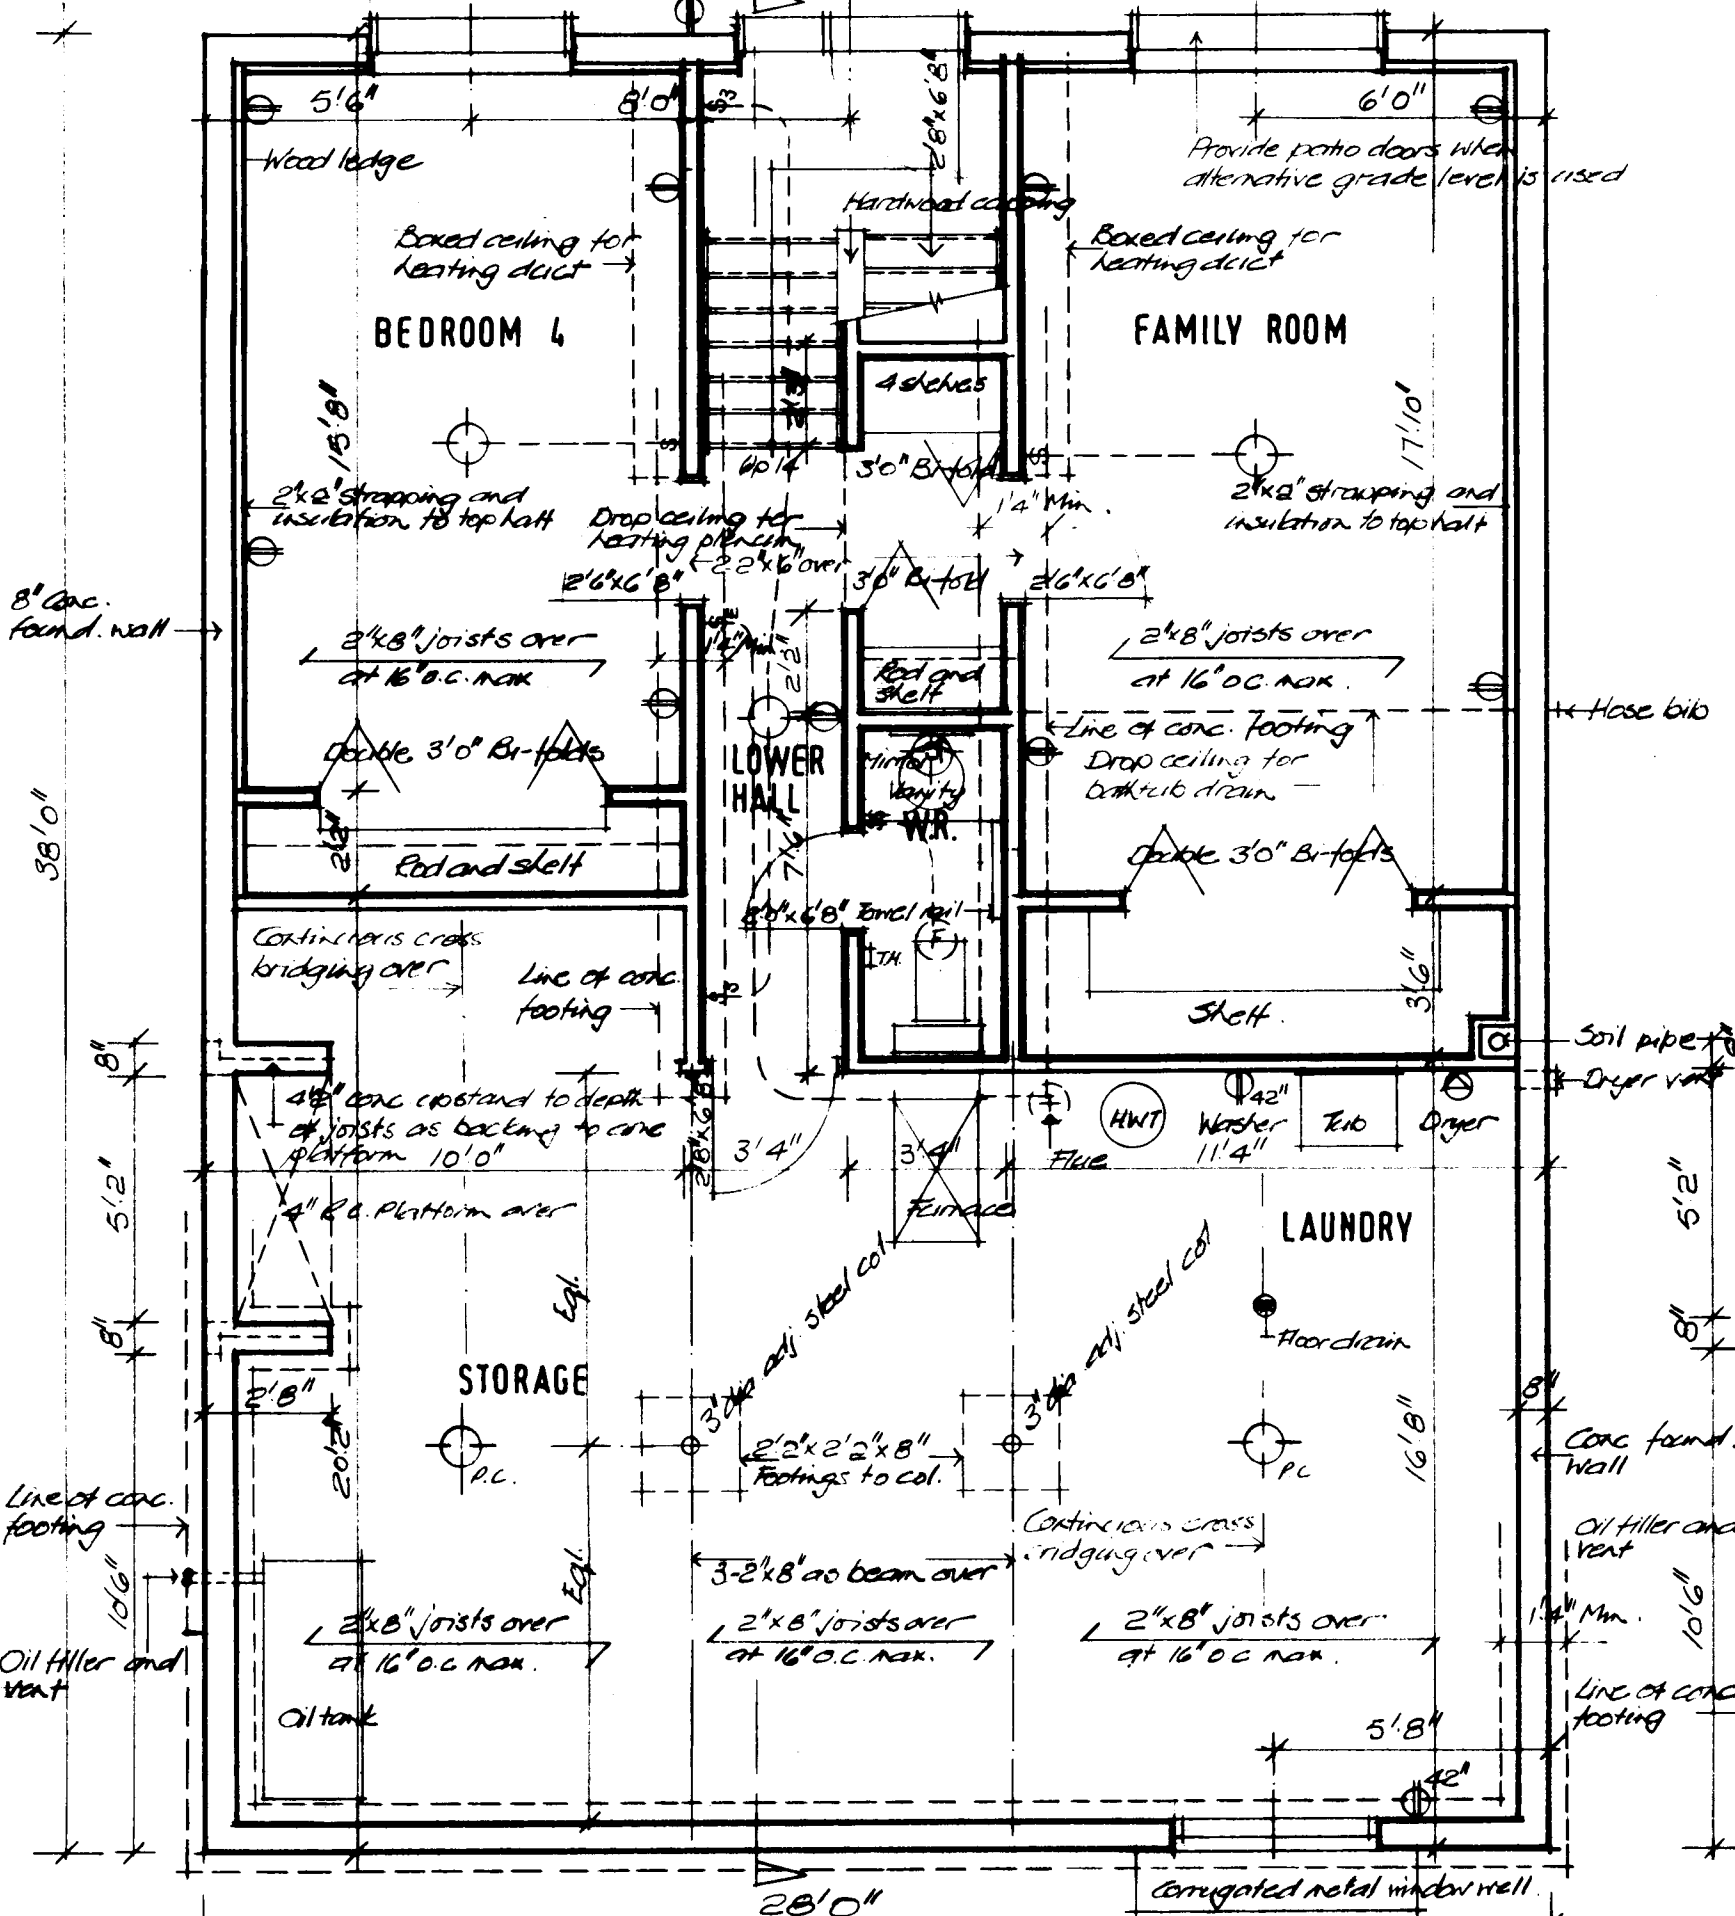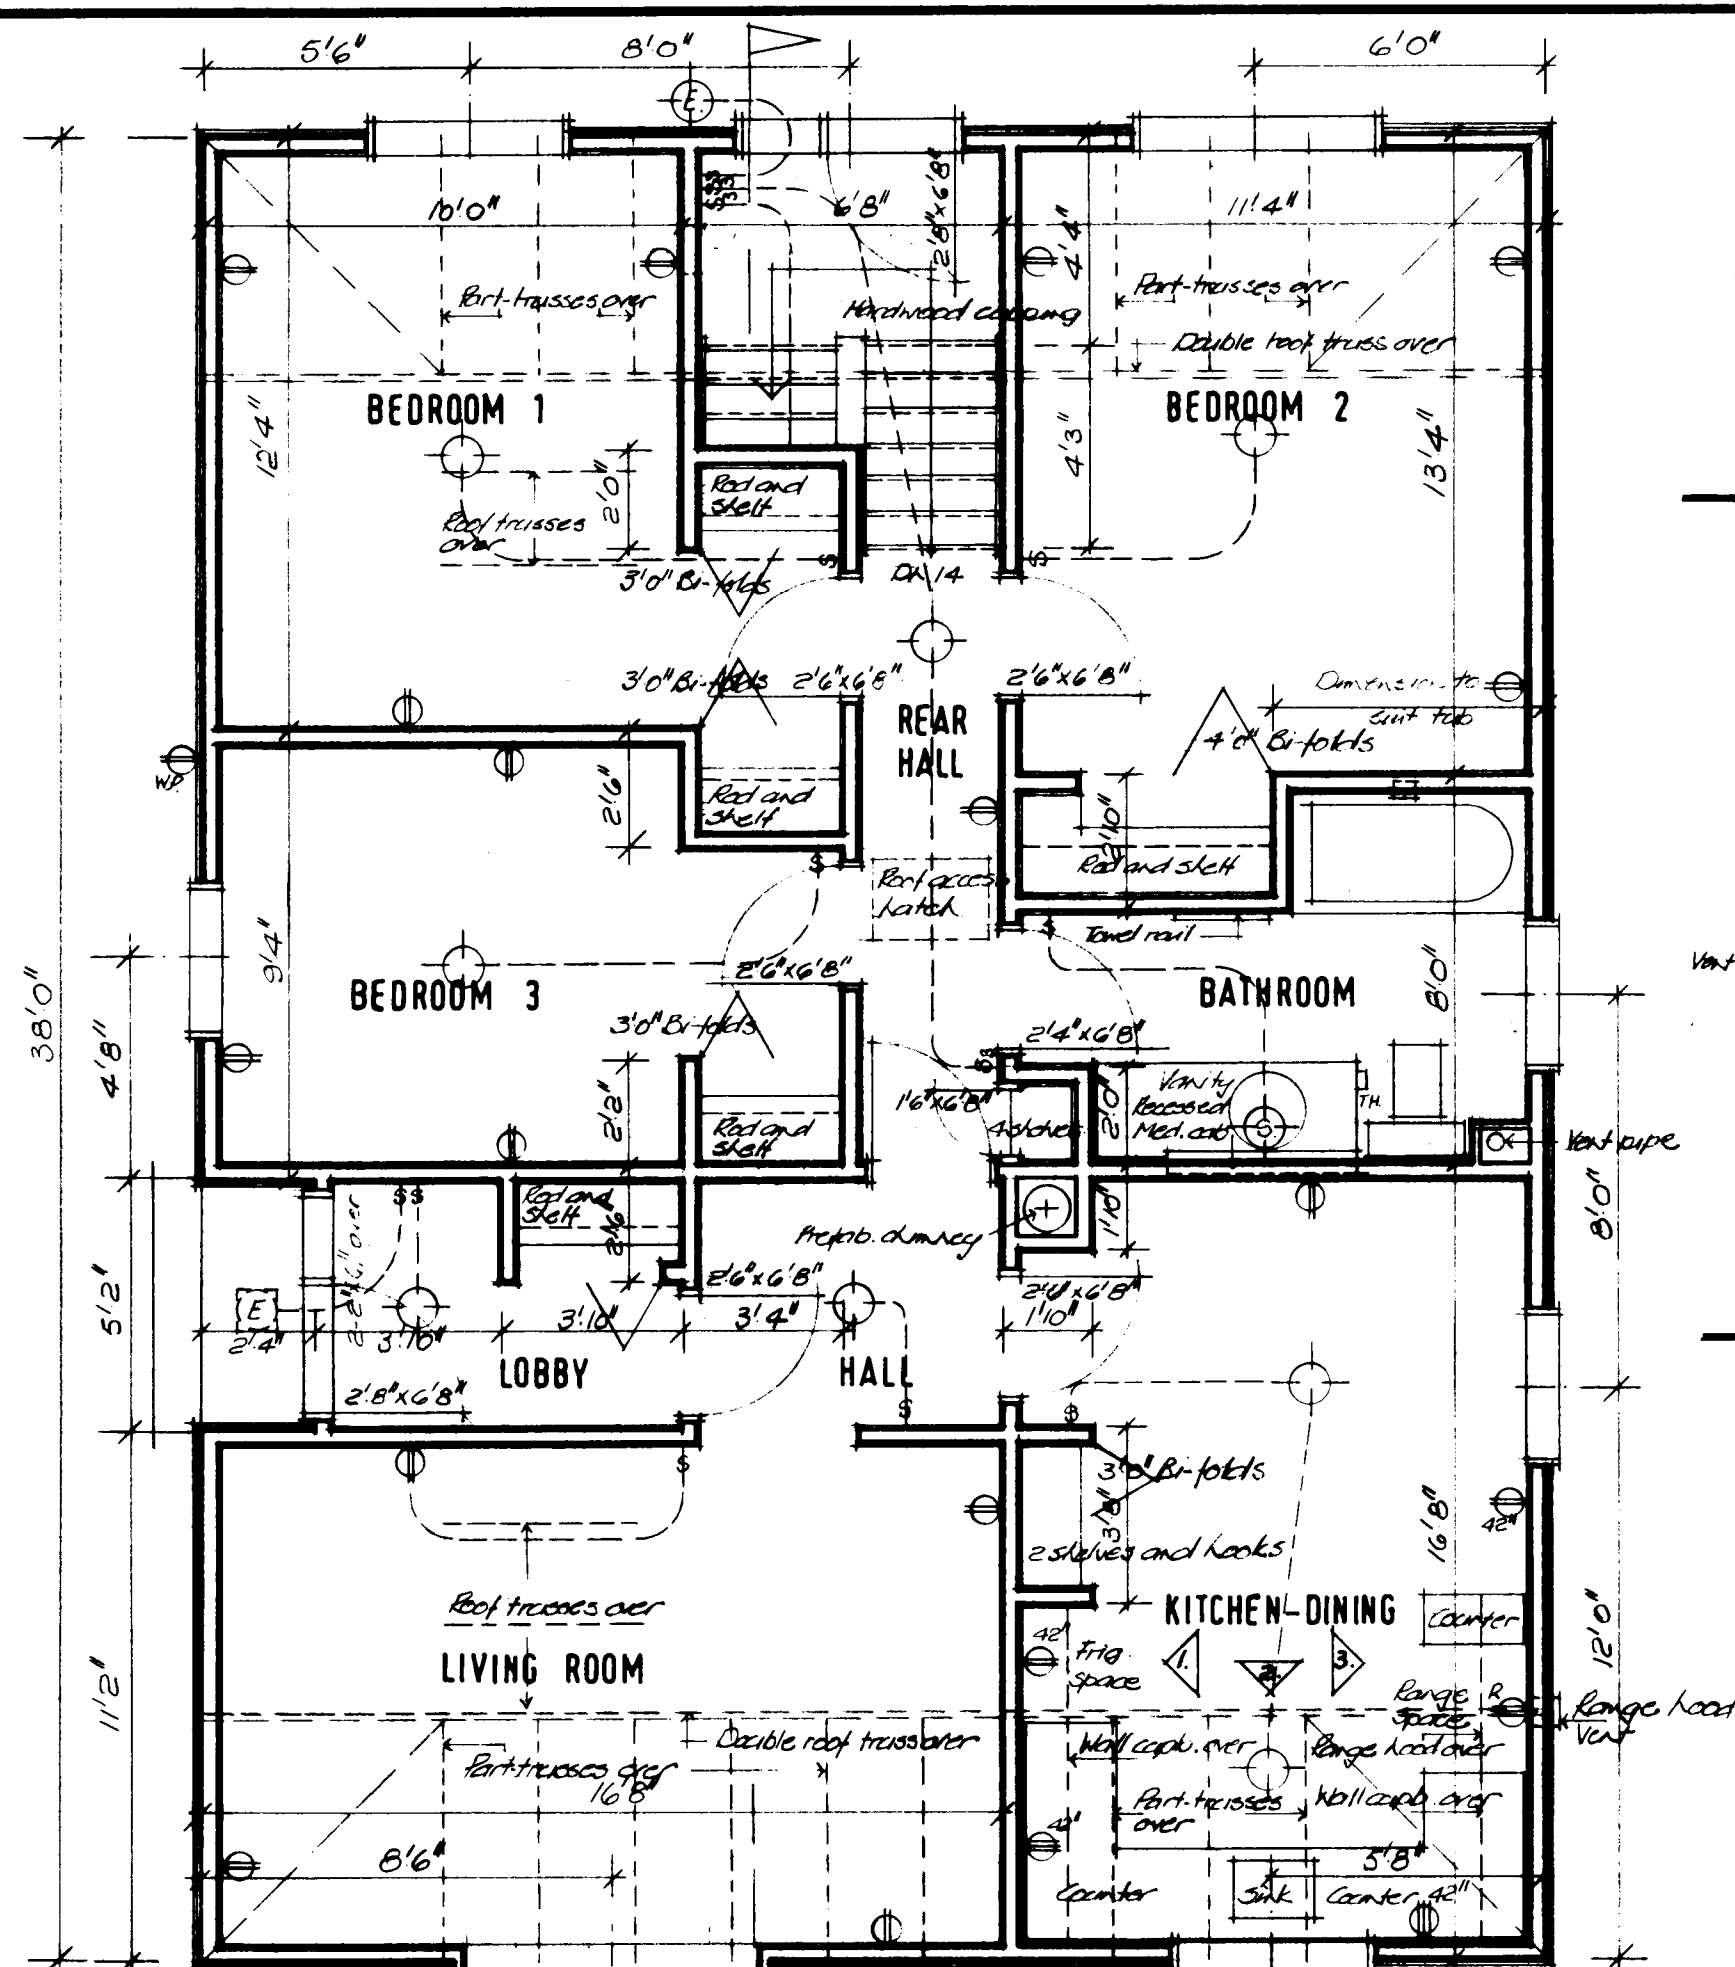

- ### GENERAL NOTES
1. ALL FOOTINGS AND FOUNDATIONS **SHALL** REST ON UNDISTURBED SOIL OR ROCK. FOOTINGS AND FOUNDATIONS MAY HAVE TO BE INCREASED TO SUIT EXISTING LOCAL SOIL CONDITIONS.
 2. DOUBLE JOISTS REQUIRED UNDER PARTITIONS RUNNING PARALLEL TO THE FLOOR JOISTS MAY BE BLOCKED APART 8" AT 4'-0" O.C. TO PERMIT THE PASSAGE OF HEATING DUCTS ETC.
 3. THE POSITION AND NUMBER OF ELECTRICAL OUTLETS MAY BE RELOCATED BUT MUST IN ALL CASES MEET THE MINIMUM REQUIREMENTS OF THE RESIDENTIAL STANDARDS AND COMPLY WITH LOCAL CODES.
 4. PROVIDE A ROD AND AT LEAST ONE SHELF IN ALL COAT AND CLOTHES CLOSETS.
 5. ALL FLOOR JOISTS ARE DESIGNED TO NO. 1 GRADE SPRUCE. ANY CHANGE OR SUBSTITUTION MUST BE APPROVED BY AUTHORITY HAVING JURISDICTION.
 6. ALL CONSTRUCTION MUST COMPLY WITH THE RESIDENTIAL STANDARDS CURRENT AT THE TIME OF CONSTRUCTION AND ANY APPLICABLE LOCAL CODES.
 7. THIS DRAWING IS INTENDED AS A GUIDE ONLY. THE FINAL CHOICE AND USE OF MATERIALS, AND METHODS AND DETAILS OF CONSTRUCTION, IS THE RESPONSIBILITY OF THE USER.

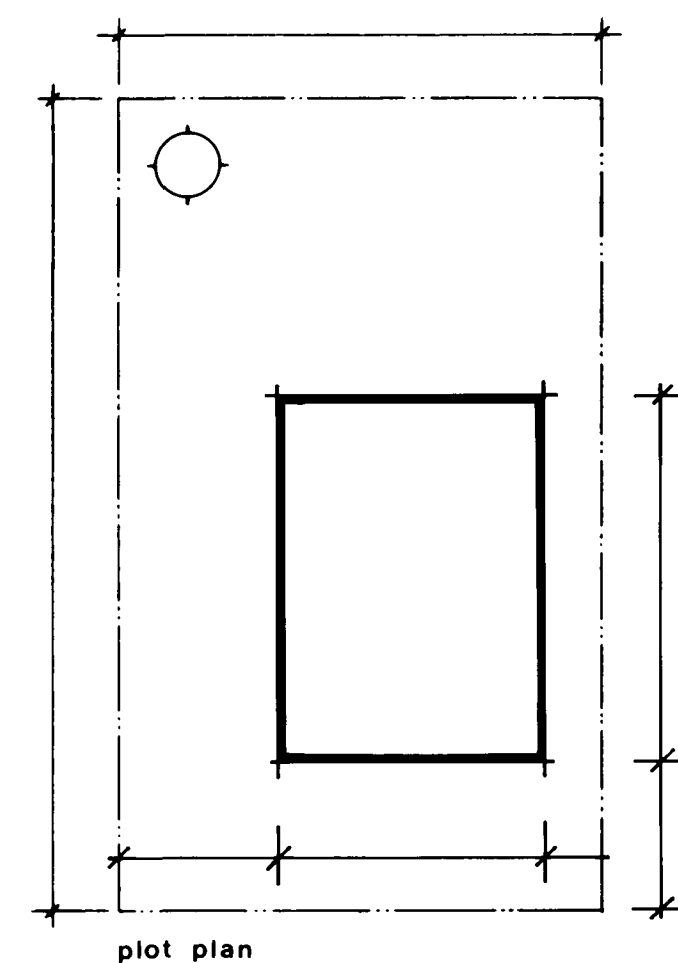

3/6/76 <i>G. Haydon</i>			
date	n.h.s. stds	chkd by	date
		revisions	by
 CMHC Central Mortgage and Housing Corporation SCHL Société centrale d'hypothèques et de logement			
		designer	
		C.M.H.C.	
		design no.	
		H - 2	
scale			
		as shown	
date		May 1976	
drawing no.		1 of 1	

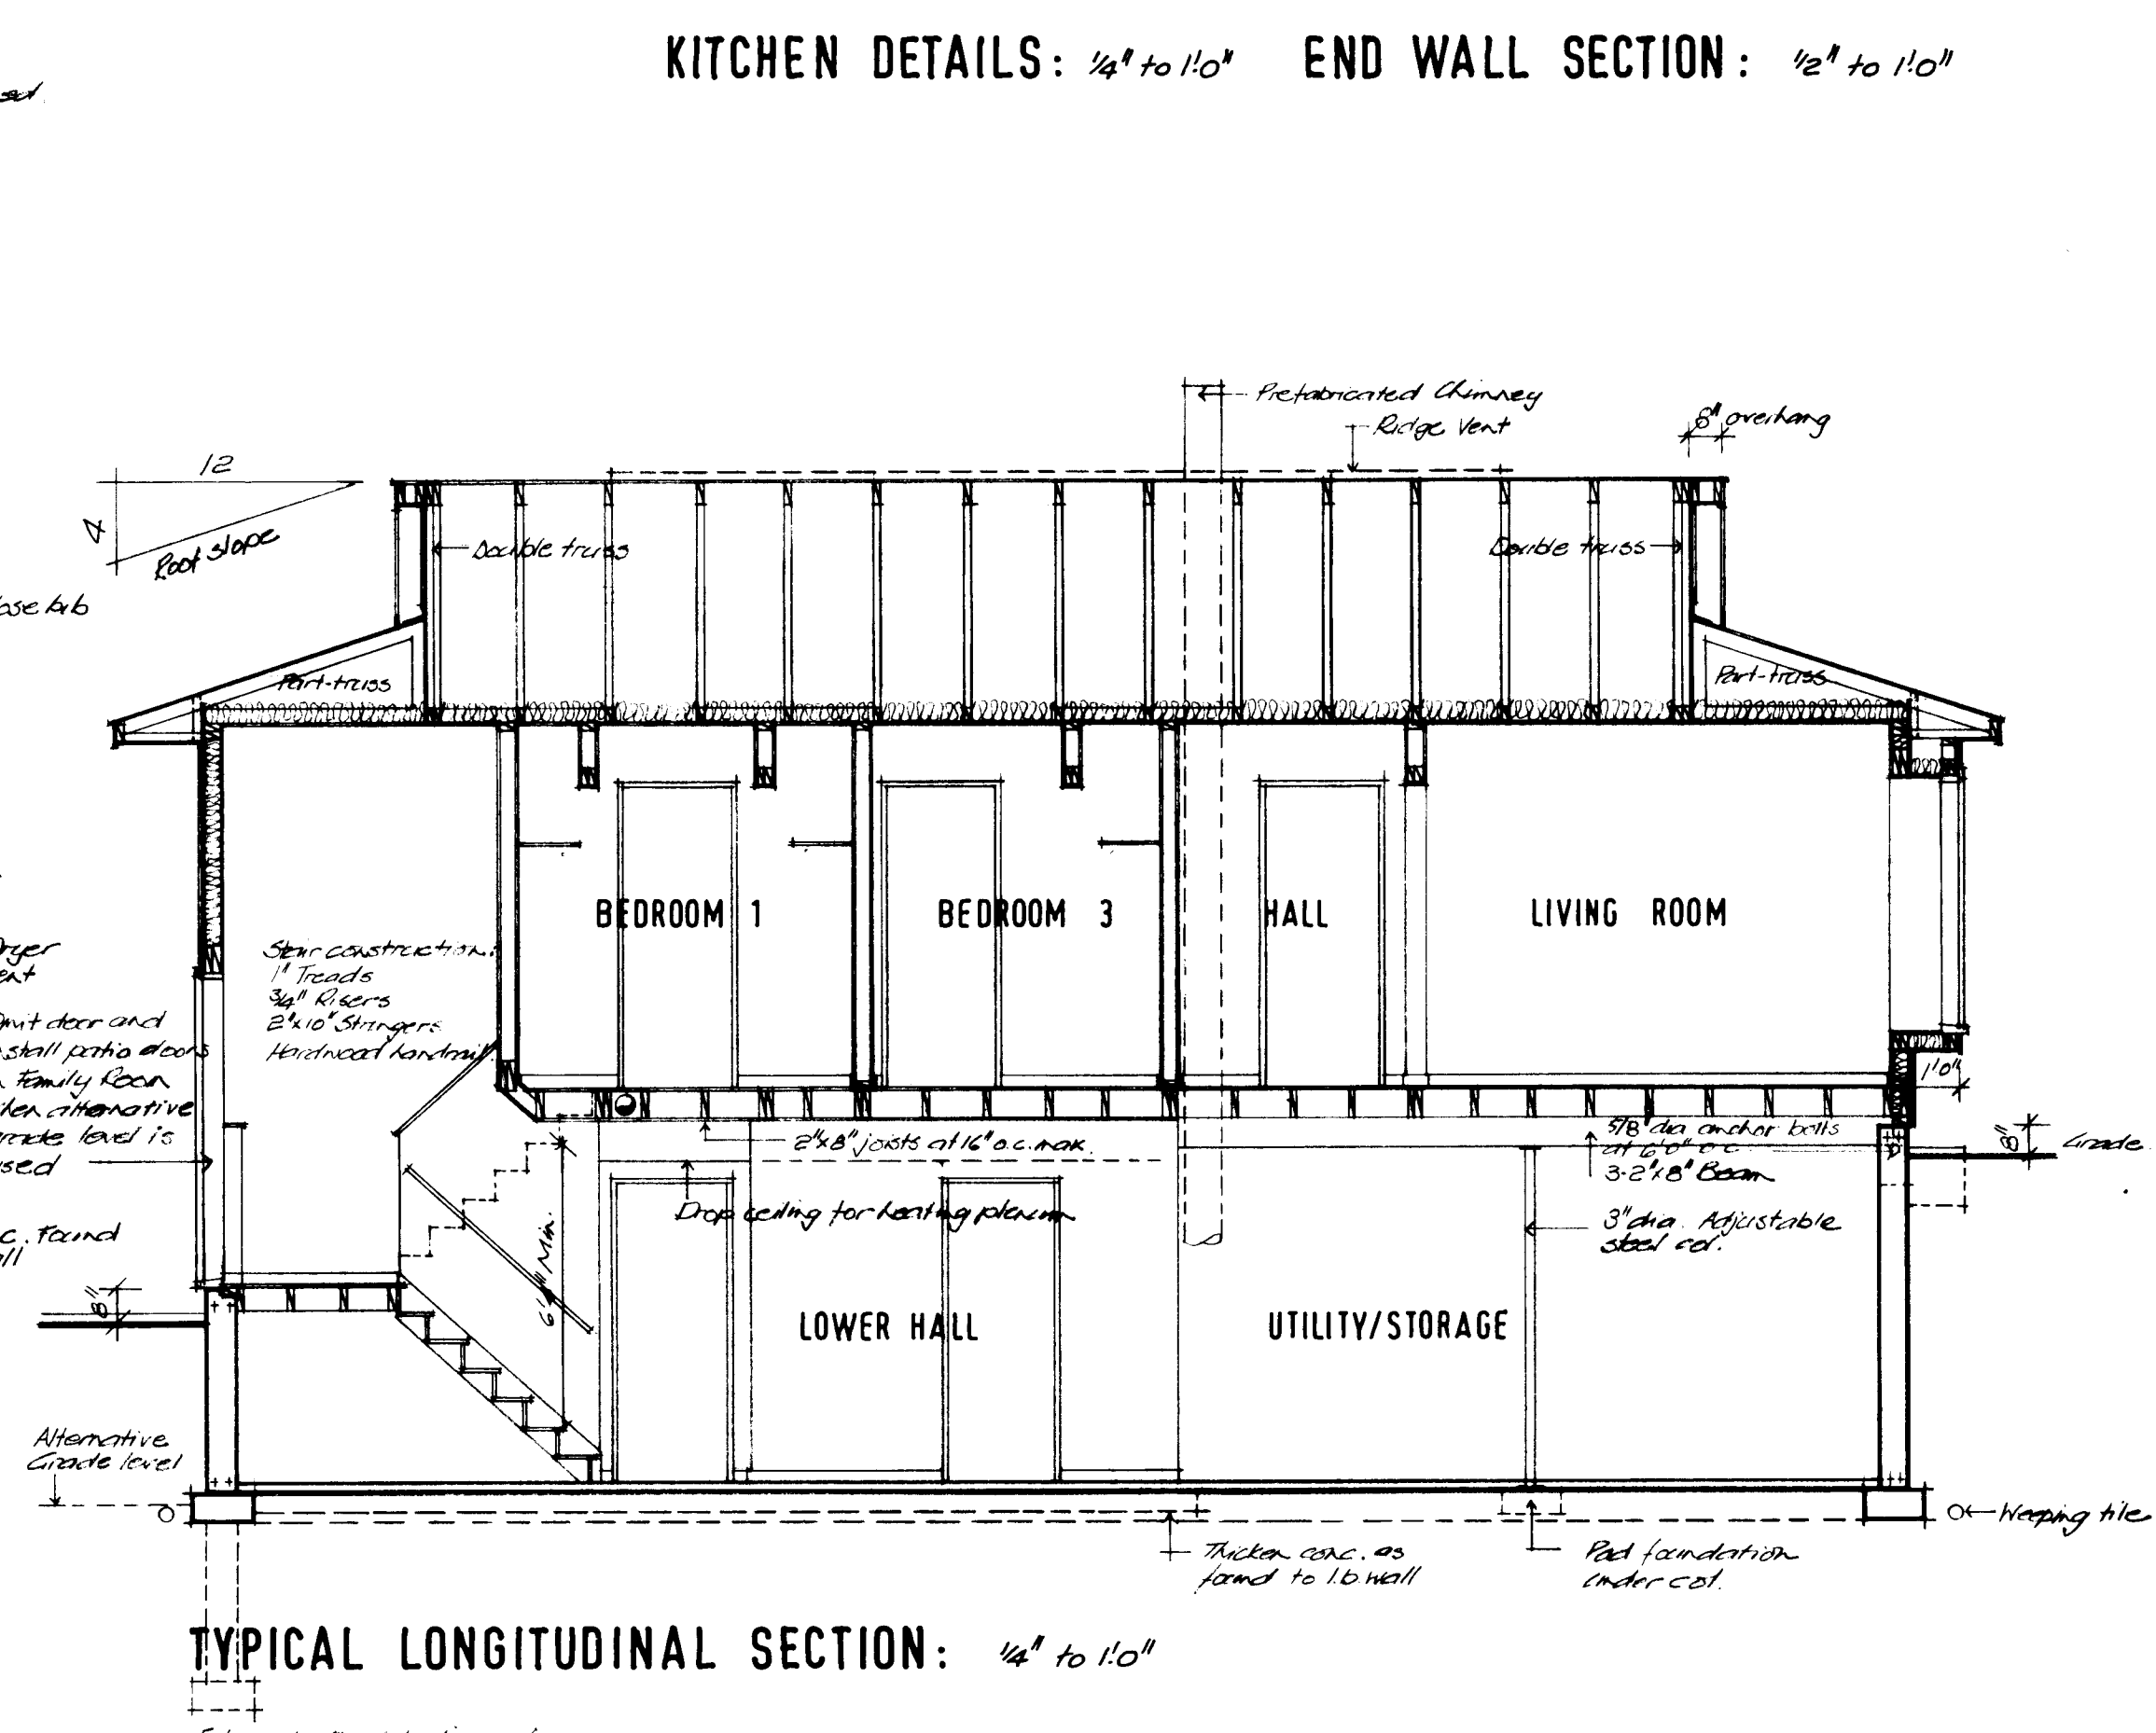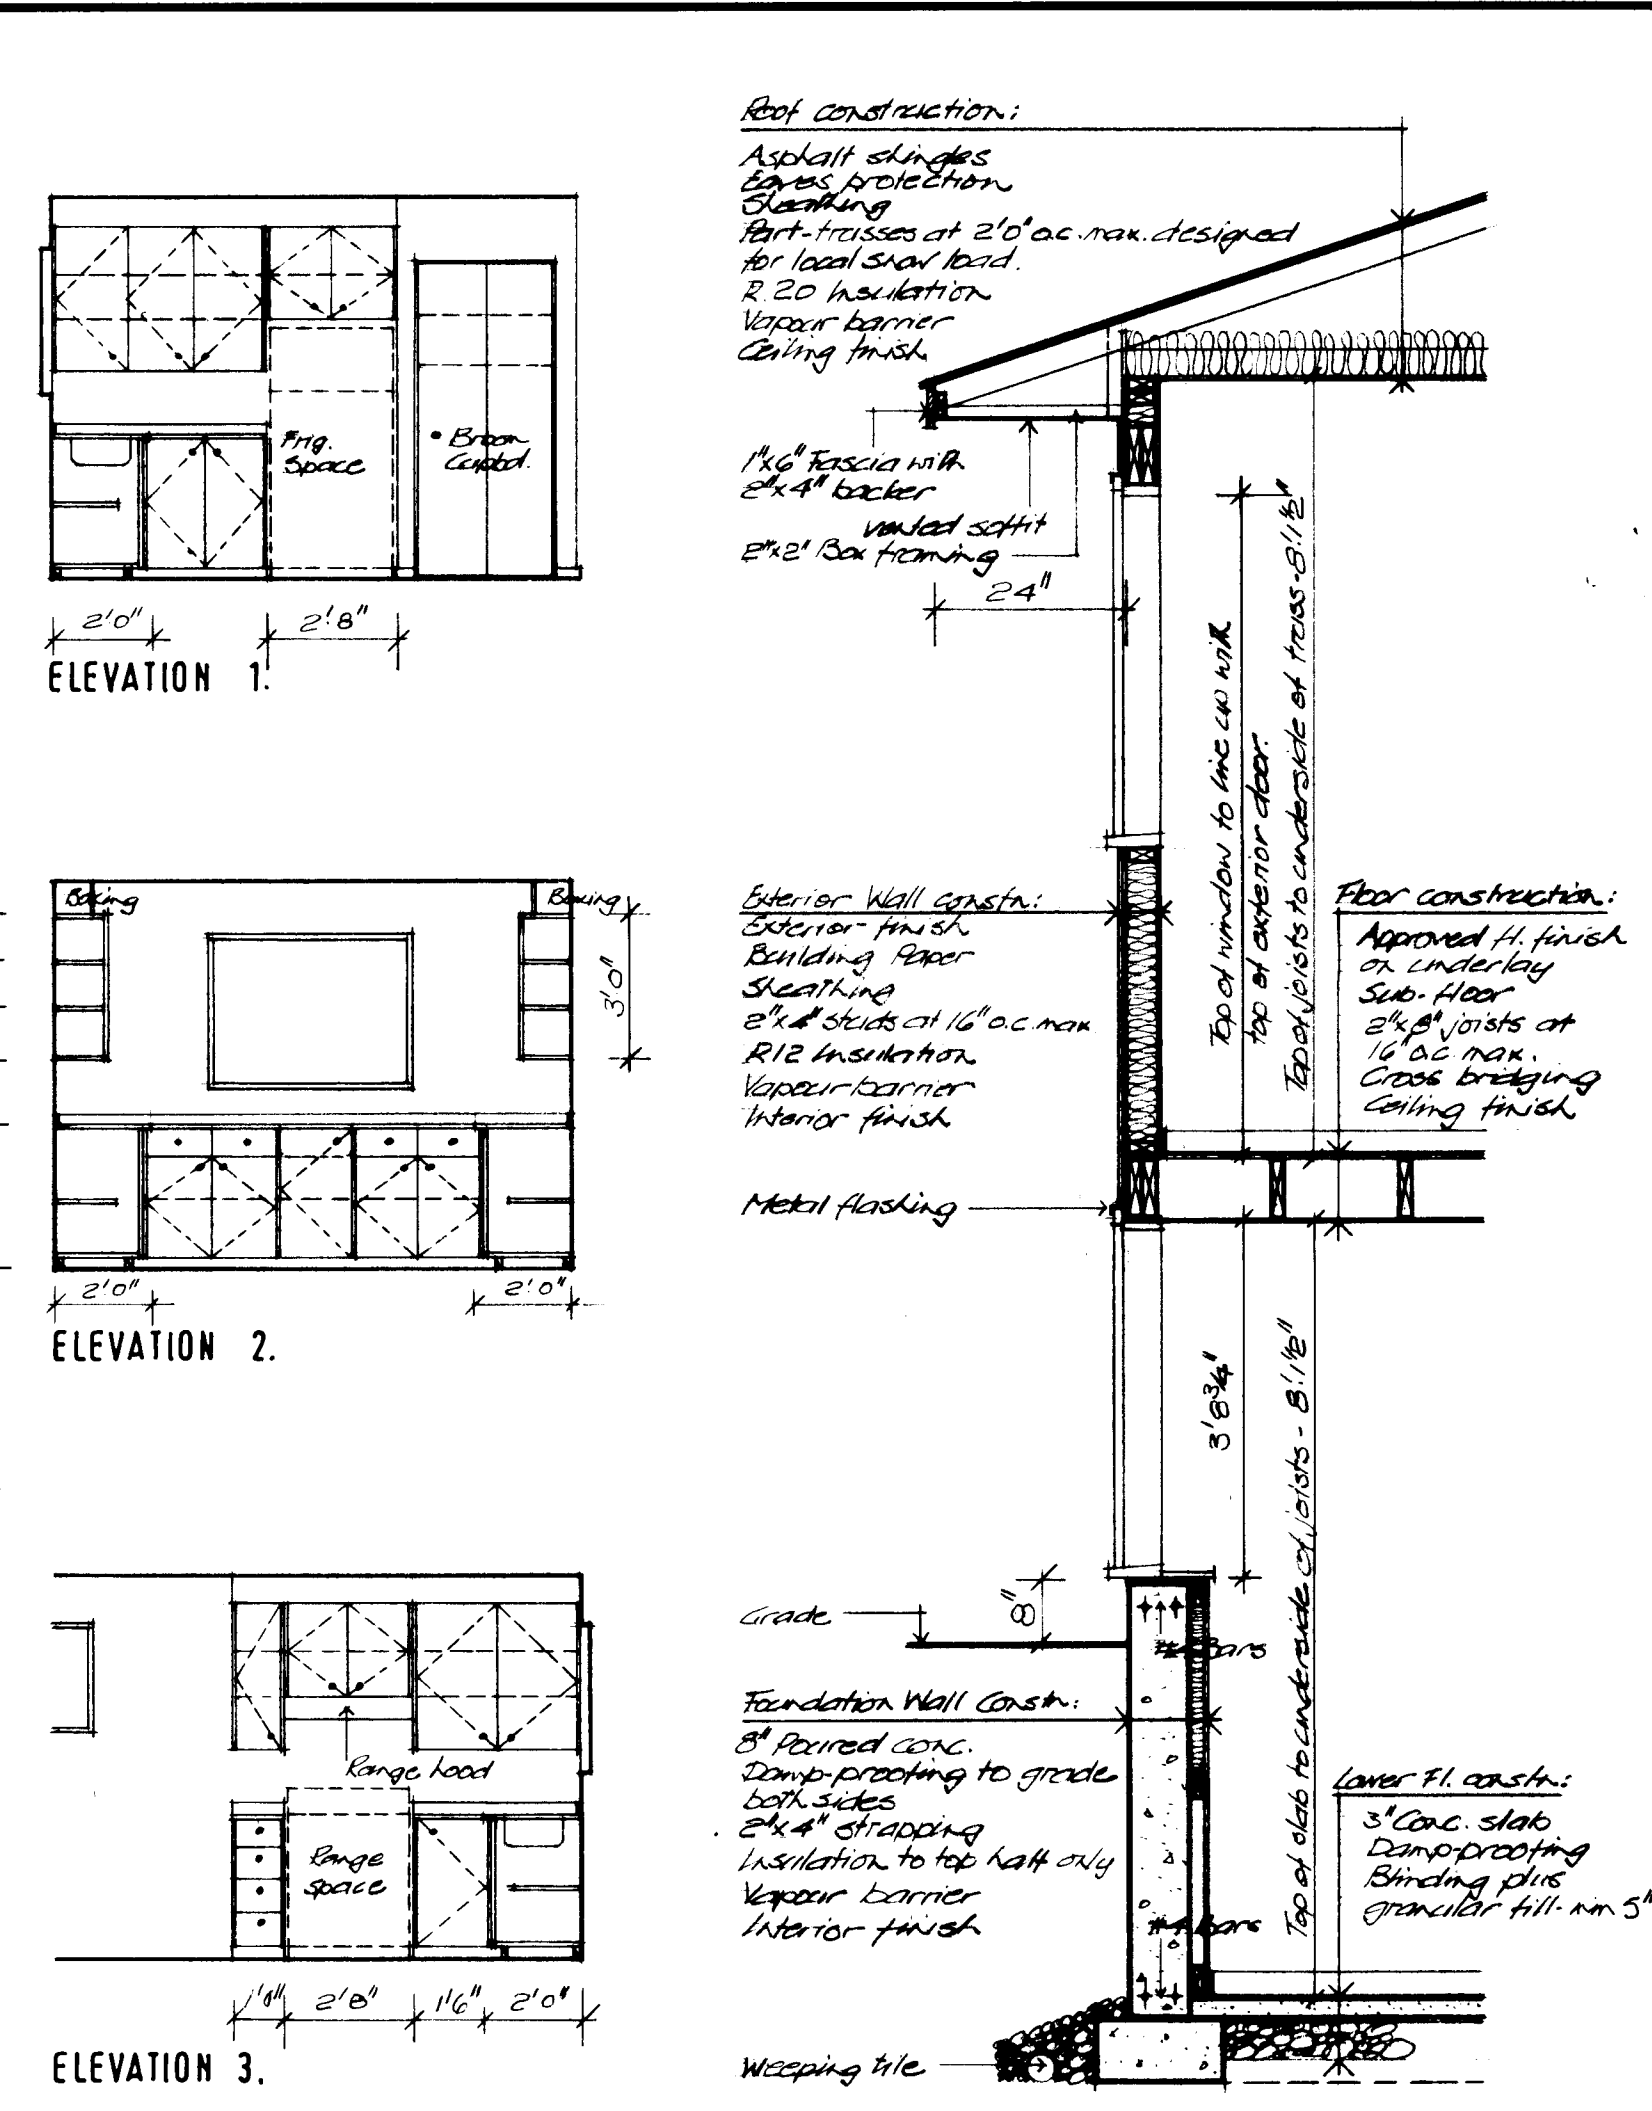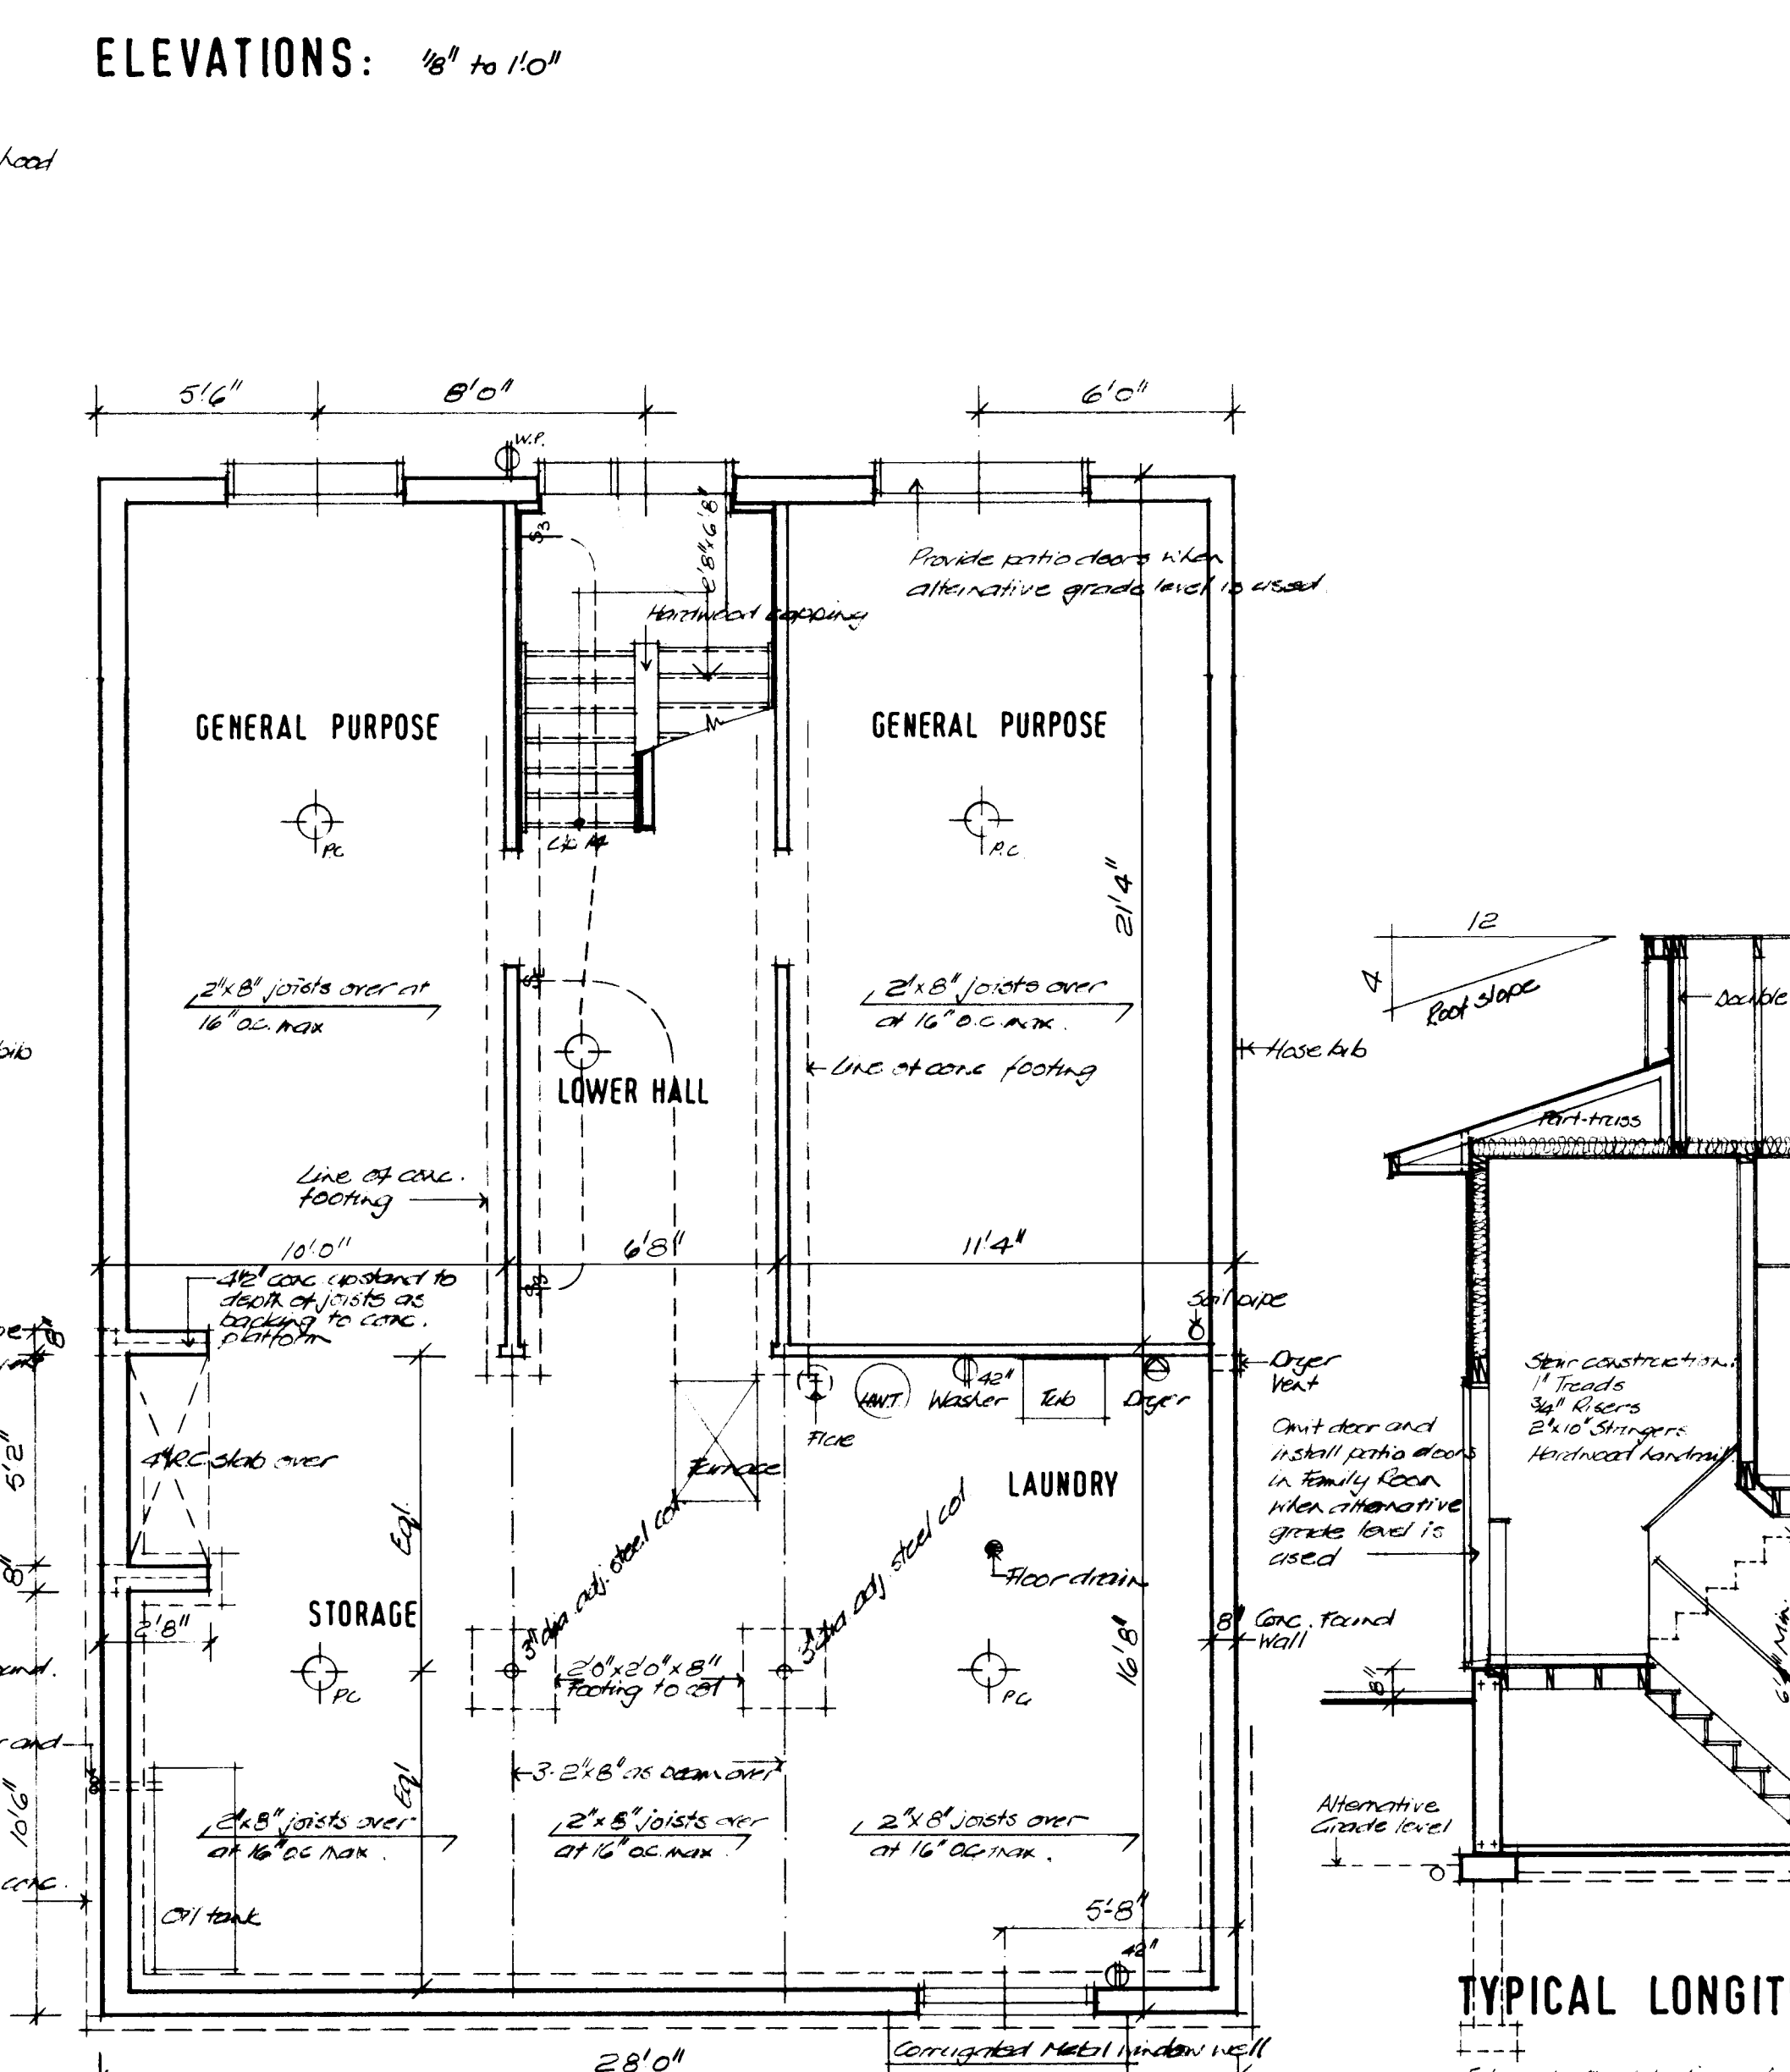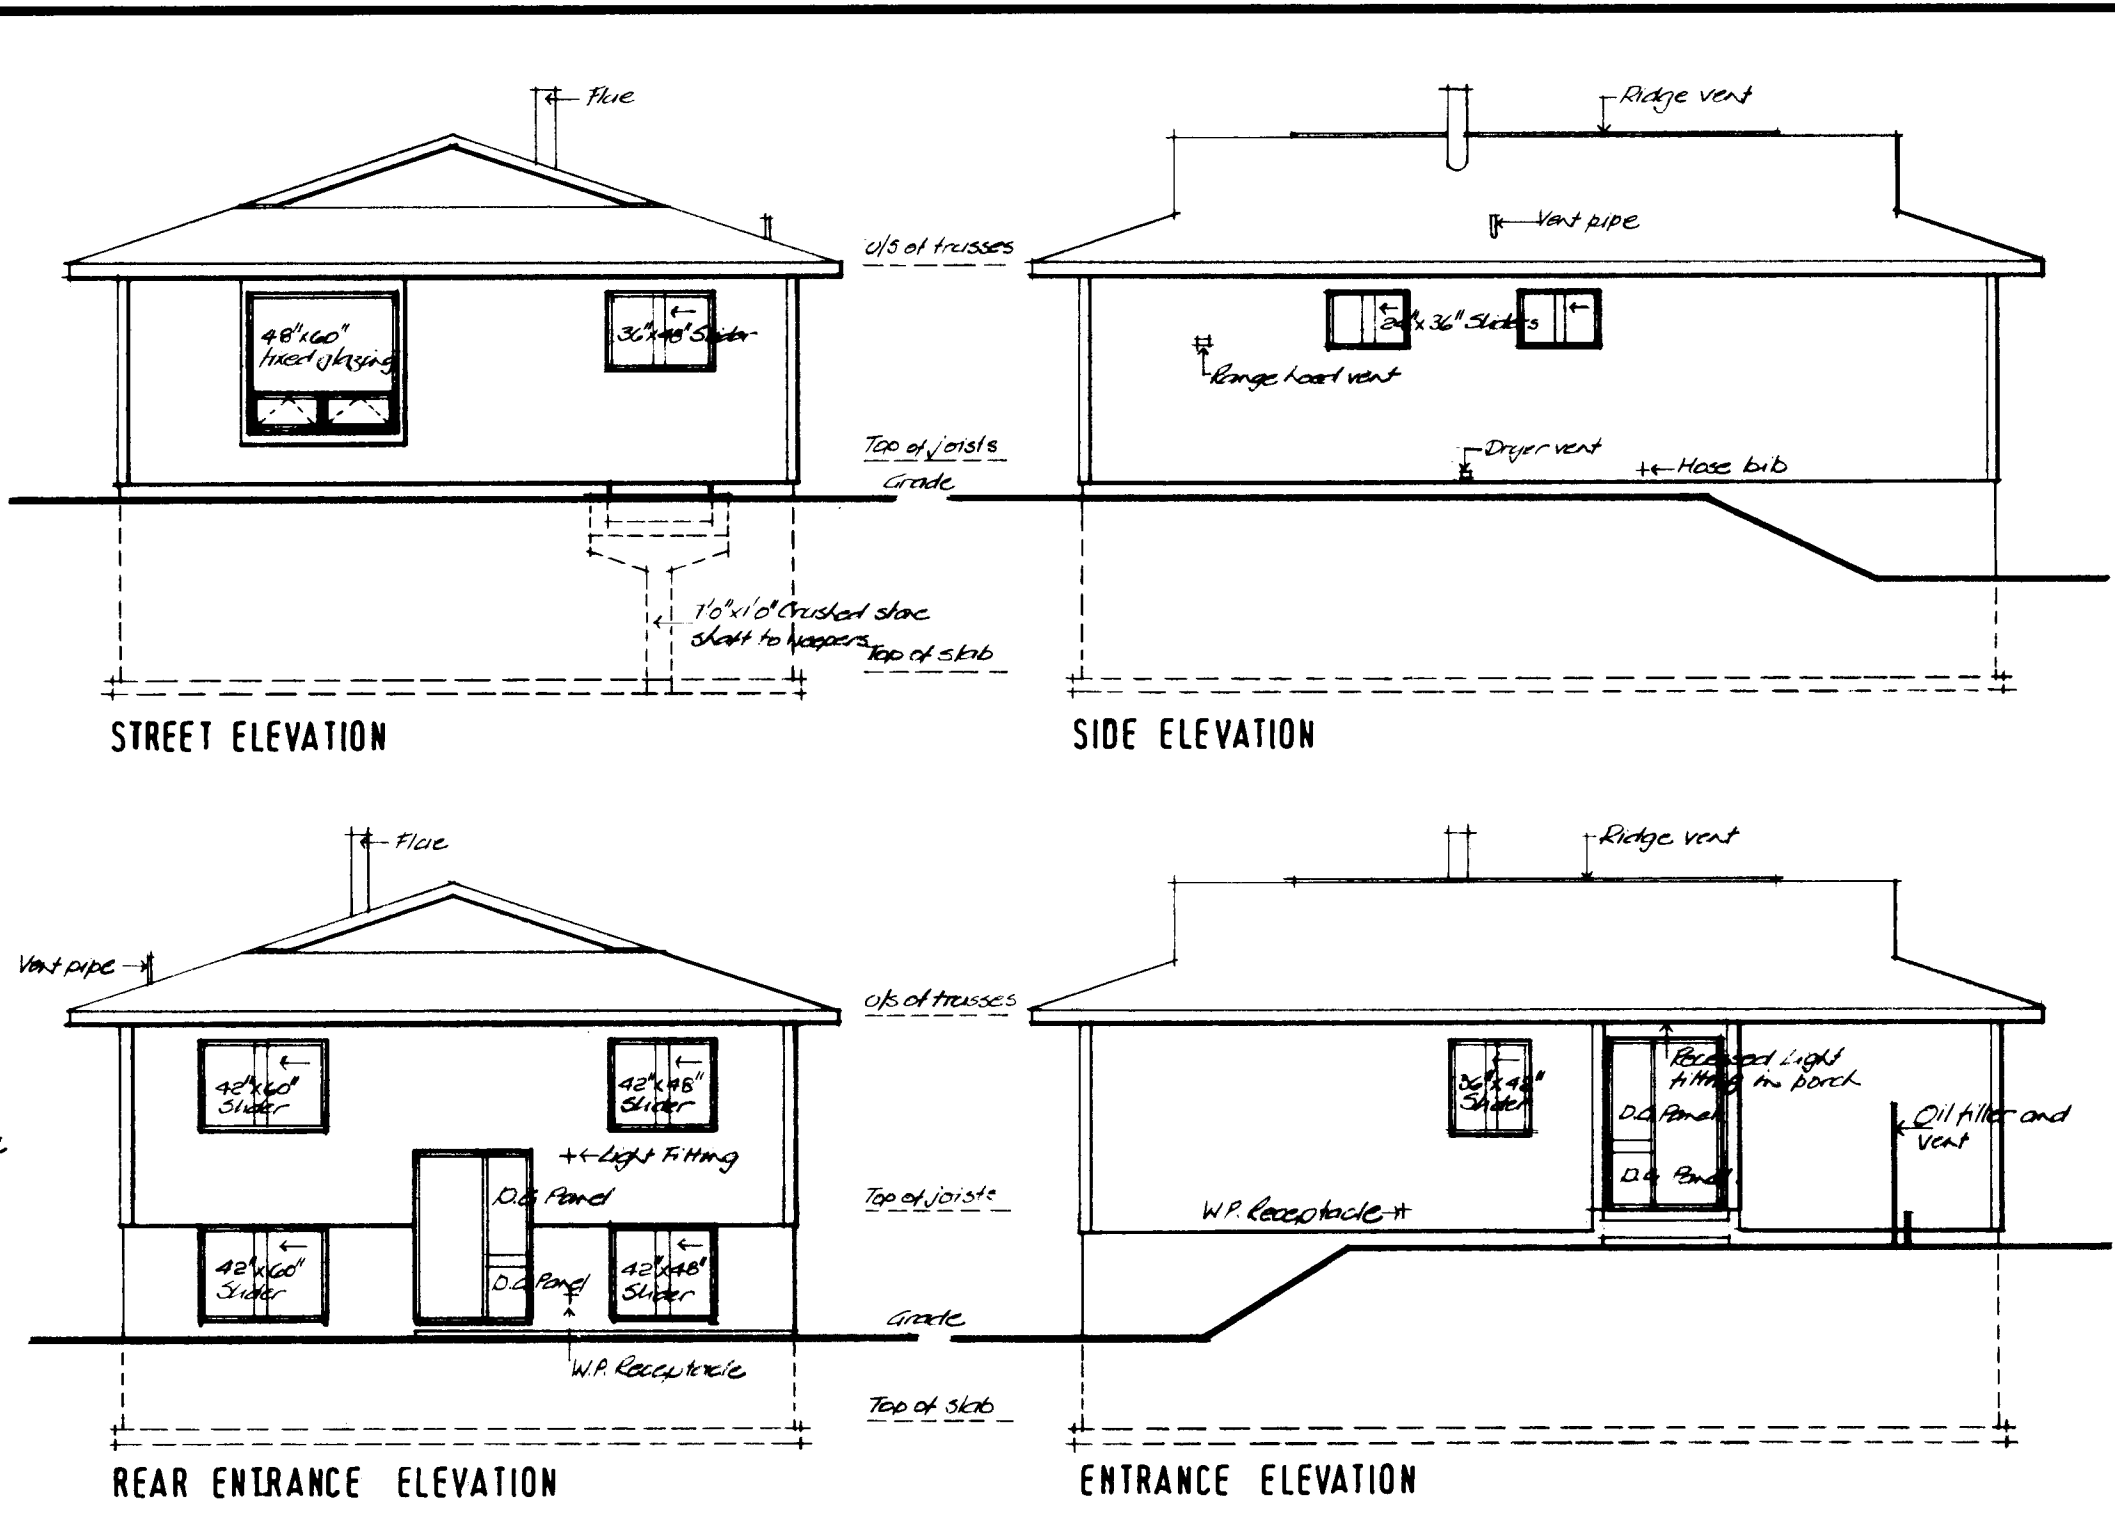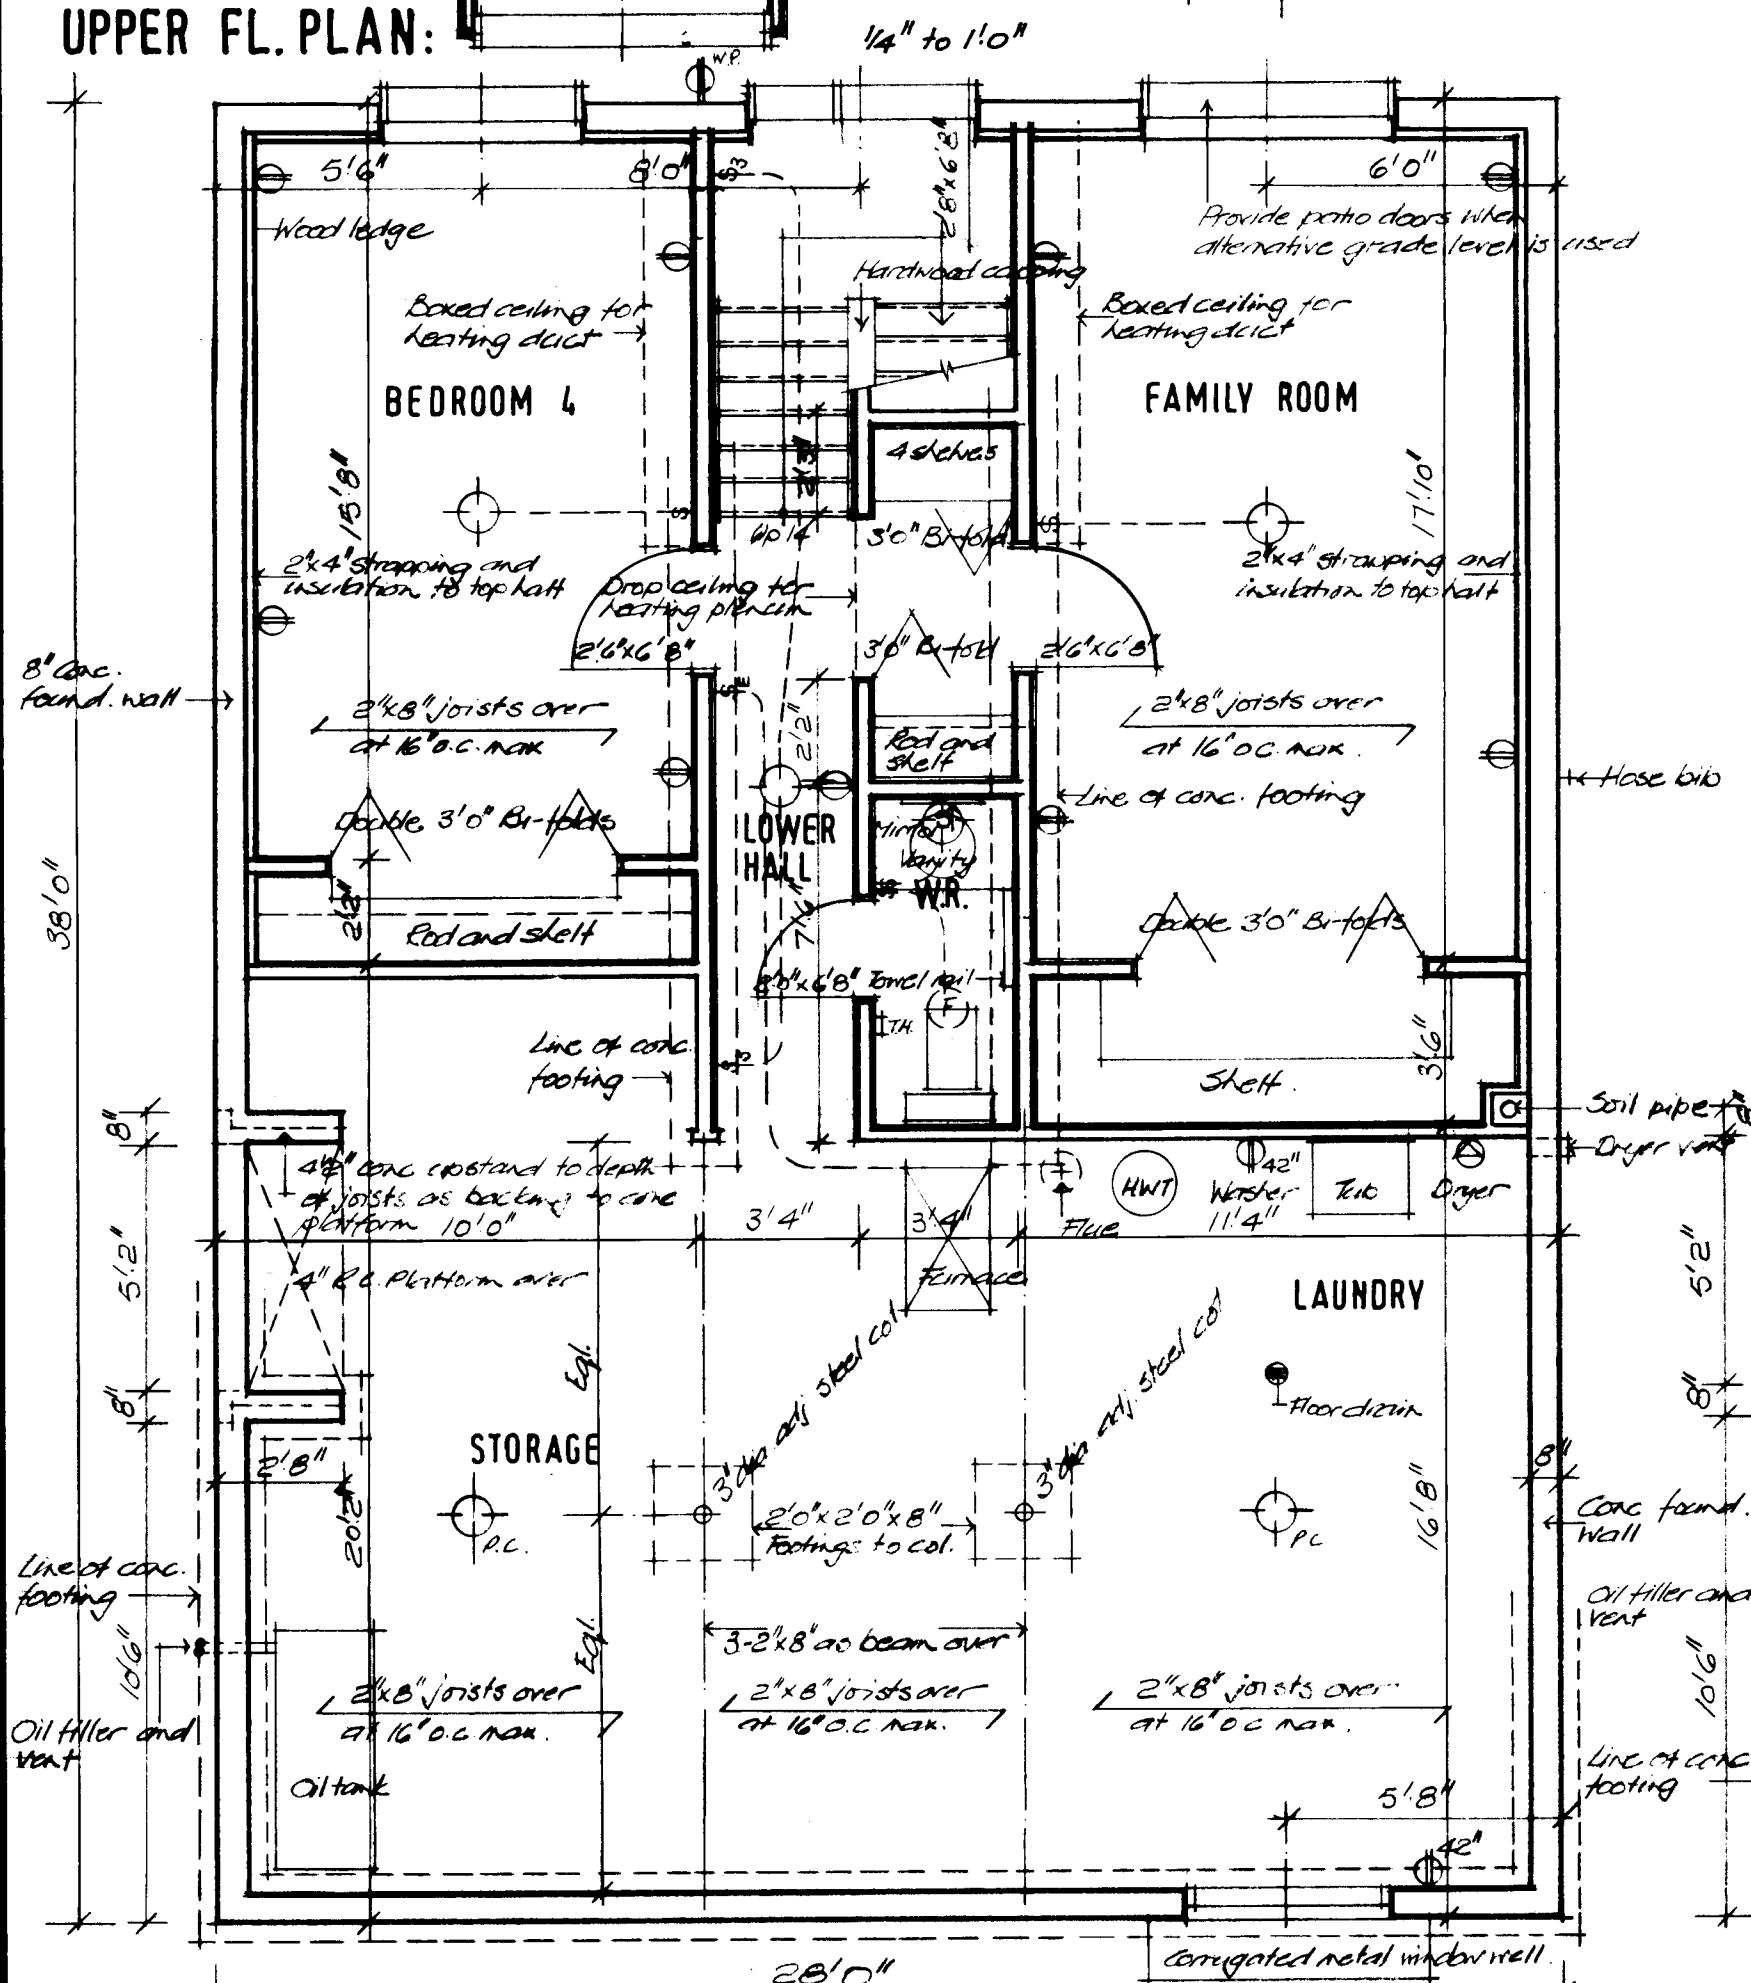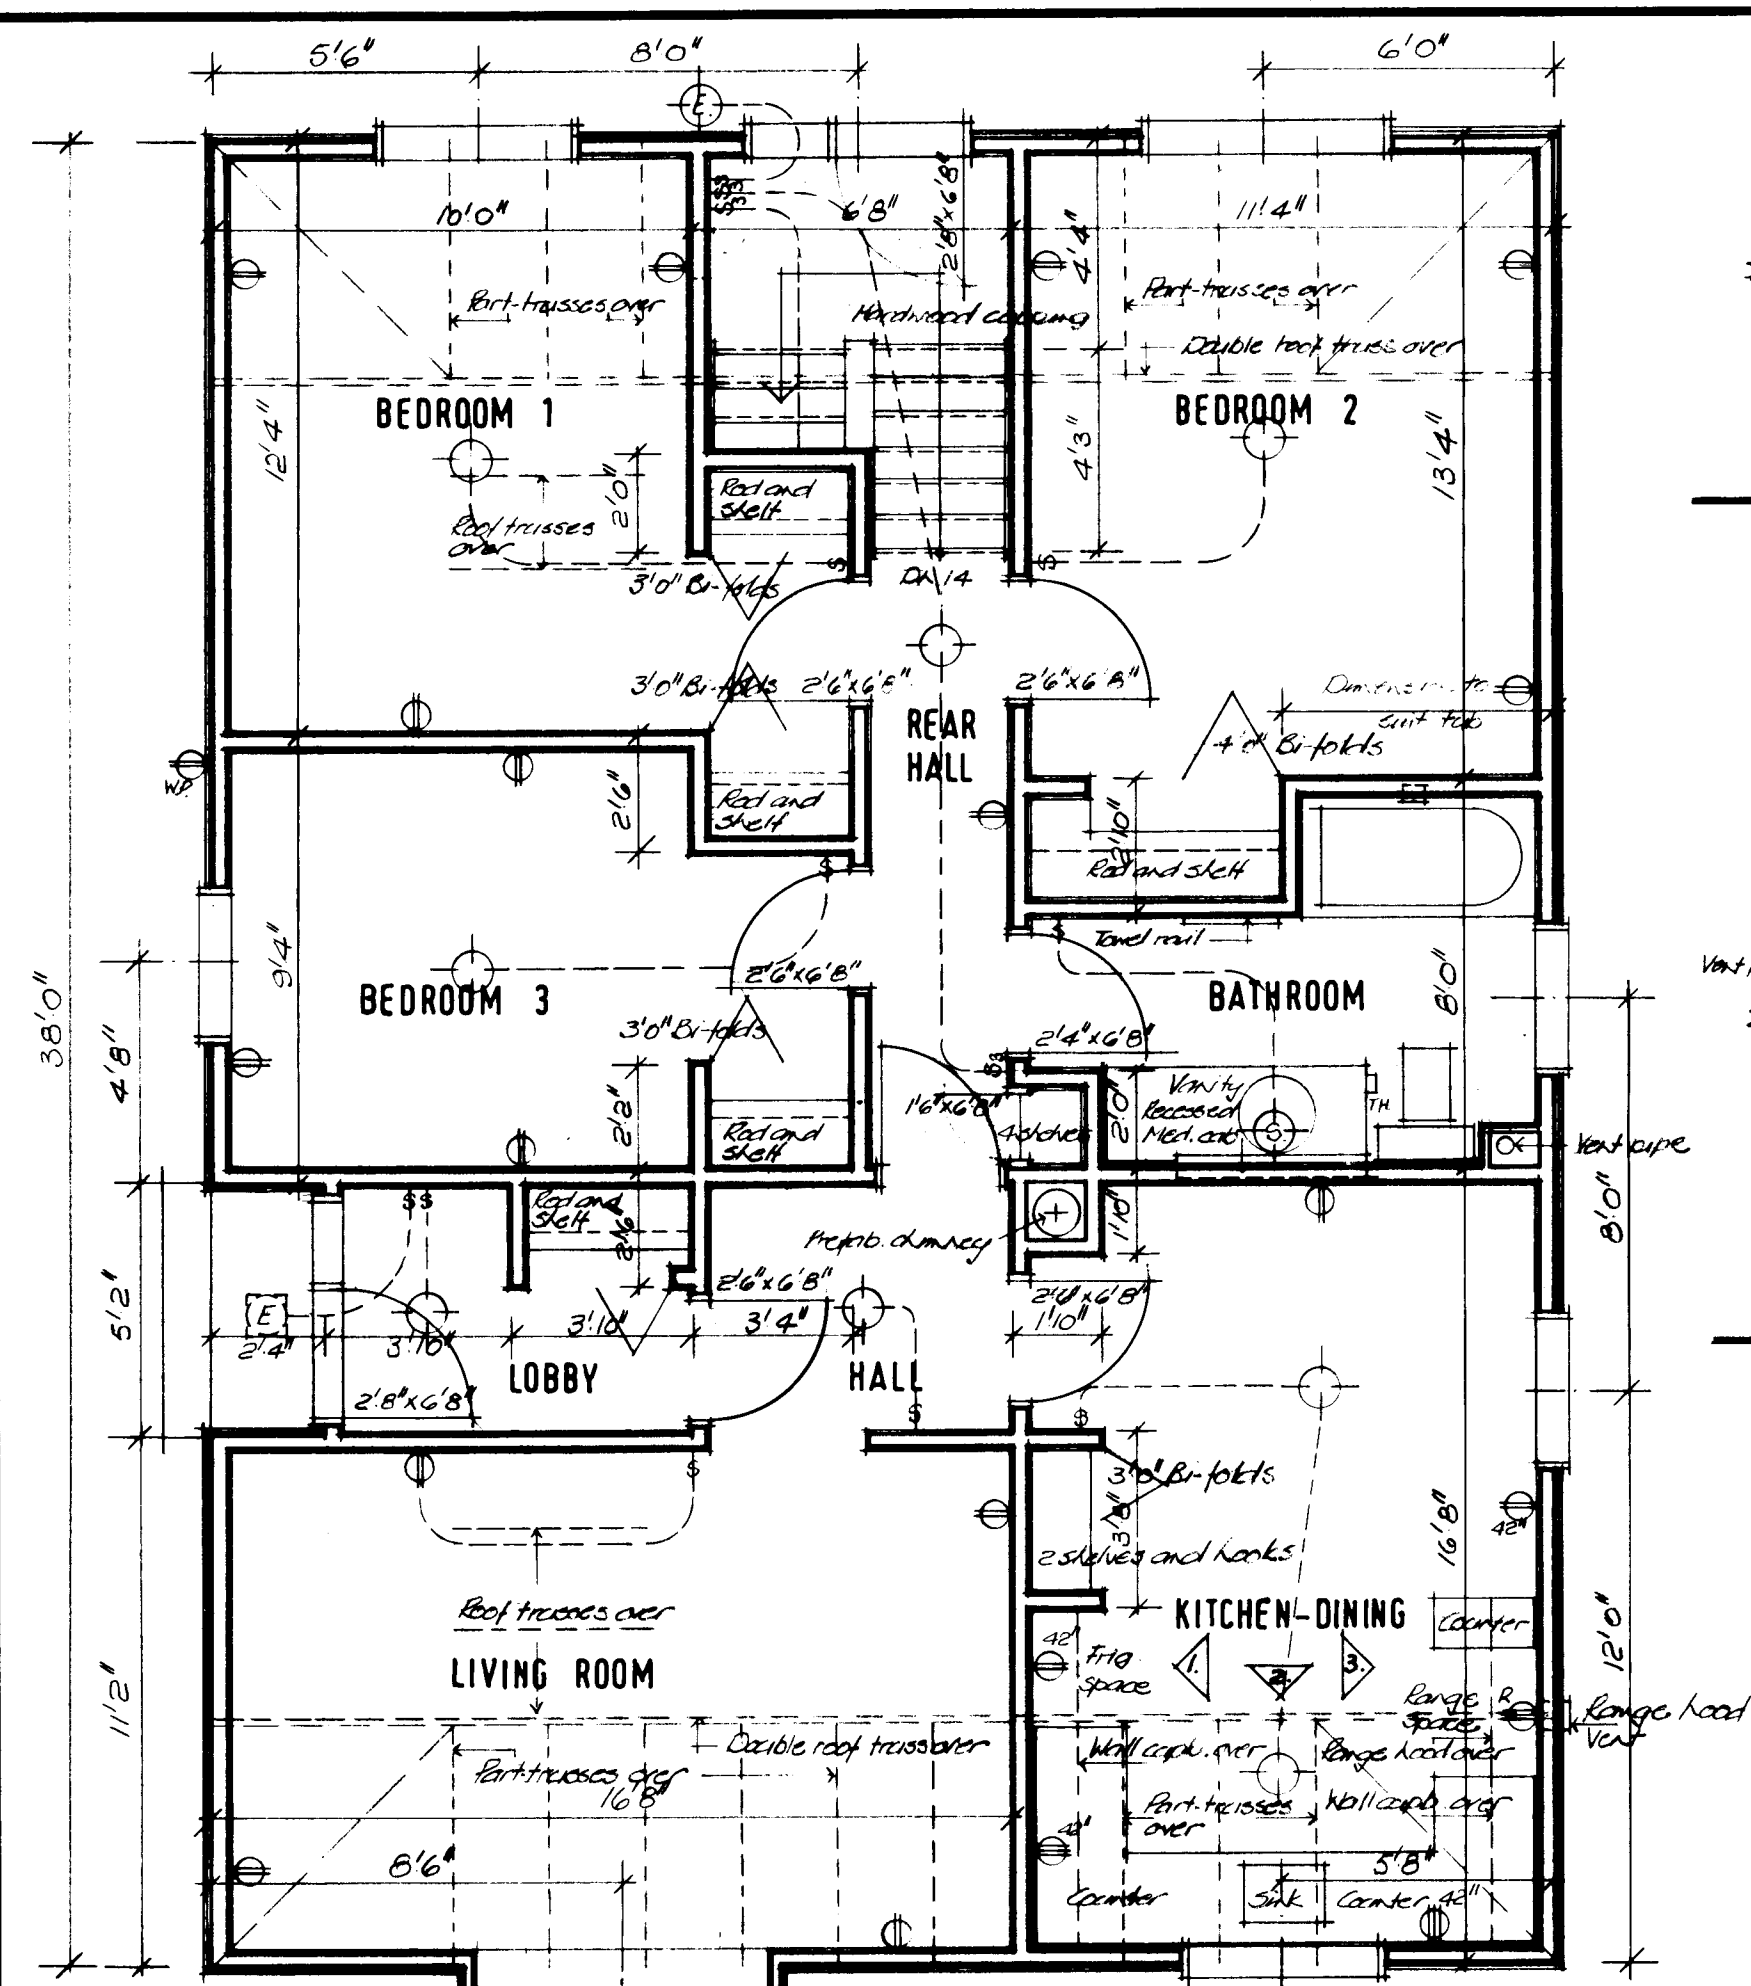

GENERAL NOTES

- ALL FOOTINGS AND FOUNDATIONS SHALL BE TAKEN DOWN TO SOLID BEARING AND BELOW THE ACCEPTED LOCAL FROST PENETRATION LINE. FOOTINGS AND FOUNDATIONS MAY HAVE TO BE INCREASED TO SUIT EXISTING SOIL CONDITIONS.
- DOUBLED JOISTS REQUIRED UNDER PARTITIONS RUNNING PARALLEL TO THE FLOOR JOISTS MAY BE BLOCKED APART 8" AT 4'-0" O.C. TO PERMIT THE PASSAGE OF HEATING DUCTS ETC.
- FOR ORDINARY LOADING CONDITIONS, WOOD LINTELS OVER DOORS, WINDOWS ETC. IN EXTERIOR AND INTERIOR WALLS SHALL BE PLACED ON EDGE.
- THE POSITION AND NUMBER OF ELECTRICAL OUTLETS MAY BE RE-LOCATED BUT MUST IN ALL CASES MEET THE MINIMUM REQUIREMENTS OF THE HOUSING STANDARDS AND COMPLY WITH LOCAL CODES.
- PROVIDE A SHELF AND ROD IN THE COAT AND CLOTHES CLOSETS.
- ADDITIONAL INSULATING MATERIAL MAY BE NECESSARY IN CERTAIN LOCALITIES TO PROVIDE THE REQUIRED RESISTANCE TO HEAT FLOW FOR SUCH AREA.
- THE STRUCTURAL MEMBERS ARE DESIGNED FOR A LIVE ROOF LOAD OF 15 LBS PER SQUARE FOOT. IN AREAS WHERE A ROOF LOAD IN EXCESS OF THE DESIGN LOAD IS EXPECTED, IT WILL BE NECESSARY TO REDESIGN THE STRUCTURAL MEMBERS ACCORDINGLY.
- ALL STRUCTURAL MEMBERS WILL BE CONSTRUCTION GRADE AND SPECIES UNLESS OTHERWISE NOTED ON THE DRAWINGS.
- All construction must comply with the Canadian Code for Residential Construction and any applicable local codes.
- This drawing is intended as a guide only. The final choice and use of methods and details of construction and materials is the responsibility of the user.

PLOT PLAN

DATE	NHA	STDS	CHKD BY	DATE	REVISIONS	BY

ARCHITECT

C.M.H.C.

DATE

DESIGN NO. SHEET NO.

H-2 1 of 1

NHA 5120-11

CENTRAL MORTGAGE AND HOUSING CORPORATION